
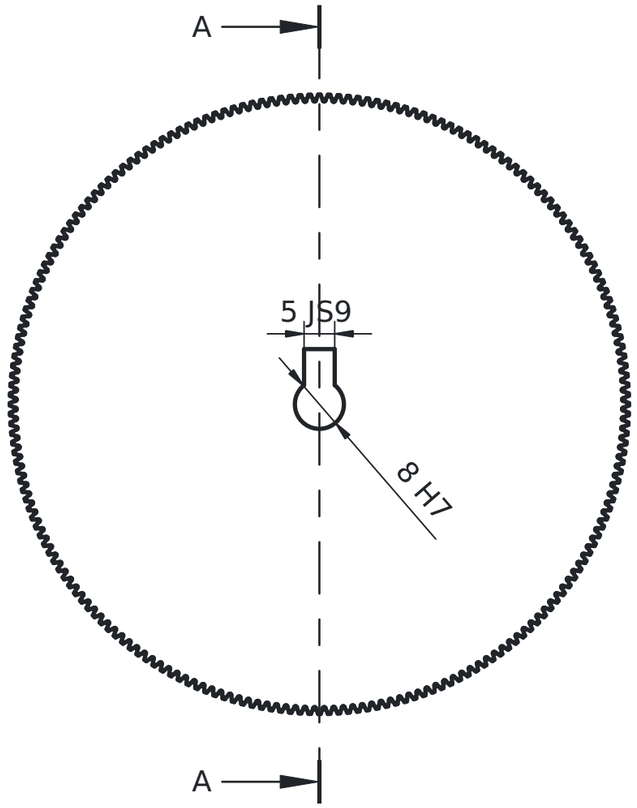


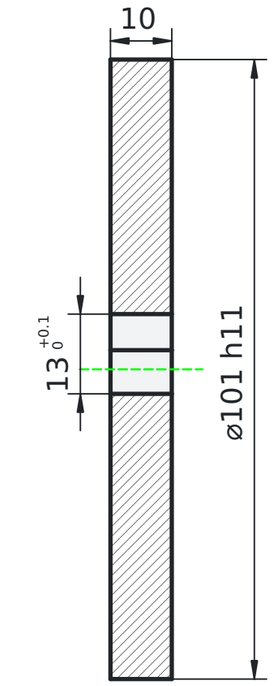

SECTION A-A

GEAR DATA
Tooth form: involute, spur
Module m = 0.5
Number of teeth z = 200
Pressure angle α = 20°
Profile shift x = 0
Pitch diameter d = 100.000
Tip diameter da = 101 h11
Root diameter df = 98.75
Addendum / dedendum = 0.5 / 0.625
Accuracy: ISO 1328-1 grade 8
Mating gear: —

NOTES
1. Untoleranced dimensions ISO 2768-m.
2. Break sharp edges 0.2 x 45°, deburr teeth.
3. Bore Ra 1.6, tooth flanks Ra 1.6,
other surfaces Ra 3.2.
4. Keyway for parallel key 5 x 5 (DIN 6885 A),
width 5 JS9, dim. 13 +0.1 over bore to key seat.

Part Material: TBD	General tolerances: ISO 2768-m		Scale: 1 : 1	
Title, supplementary title: Spur gear m0.5 z200 Bore Ø8 H7, keyway 5 JS9	Created by:		Owner:	
	Approved by:			
Document type: Component Drawing	Drawing number: GEAR-M05-Z200		Responsible department:	
Document status: Draft	Language: EN	Issue date: 9/27/26	Revision: A	Sheet: 1 / 1