

Step 1: Router IP Configuration

```
Router
% Bad IP address or host name
% Unknown command or computer name, or unable to find computer address
Router#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)# int e0/0
Router(config-if)#ip add 50.0.0.1 255.0.0.0
Router(config-if)#no sh
Router(config-if)#int e0/1
Router(config-if)#ip add 60.0.0.1 255.0.0.0
*Jul 18 05:21:10.426: %PNP-6-PNP_DISCOVERY_STOPPED: PnP Discovery stopped (Config Wizard)
Router(config-if)#ip add 60.0.0.1 255.0.0.0
Router(config-if)#no sh
Router(config-if)#exit
Router(config)#exit
Router#sh i
*Jul 18 05:21:28.034: %SYS-5-CONFIG_I: Configured from console by console
Router#sh ip int bri

```


Interface	IP-Address	OK?	Method	Status	Protocol
Ethernet0/0	50.0.0.1	YES	manual	up	up
Ethernet0/1	60.0.0.1	YES	manual	up	up
Ethernet0/2	unassigned	YES	IFIP	down	down
Ethernet0/3	unassigned	YES	IFIP	down	down

```
Router#sh ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2
i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
ia - IS-IS inter area, * - candidate default, U - per-user static route
o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
a - application route
+ - replicated route, % - next hop override, p - overrides from PRR


Gateway of last resort is not set

50.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    50.0.0.0/8 is directly connected, Ethernet0/0
L    50.0.0.1/32 is directly connected, Ethernet0/0
60.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    60.0.0.0/8 is directly connected, Ethernet0/1
L    60.0.0.1/32 is directly connected, Ethernet0/1
Router#
```

Step 2: PC-1 IP Address & Default Gateway

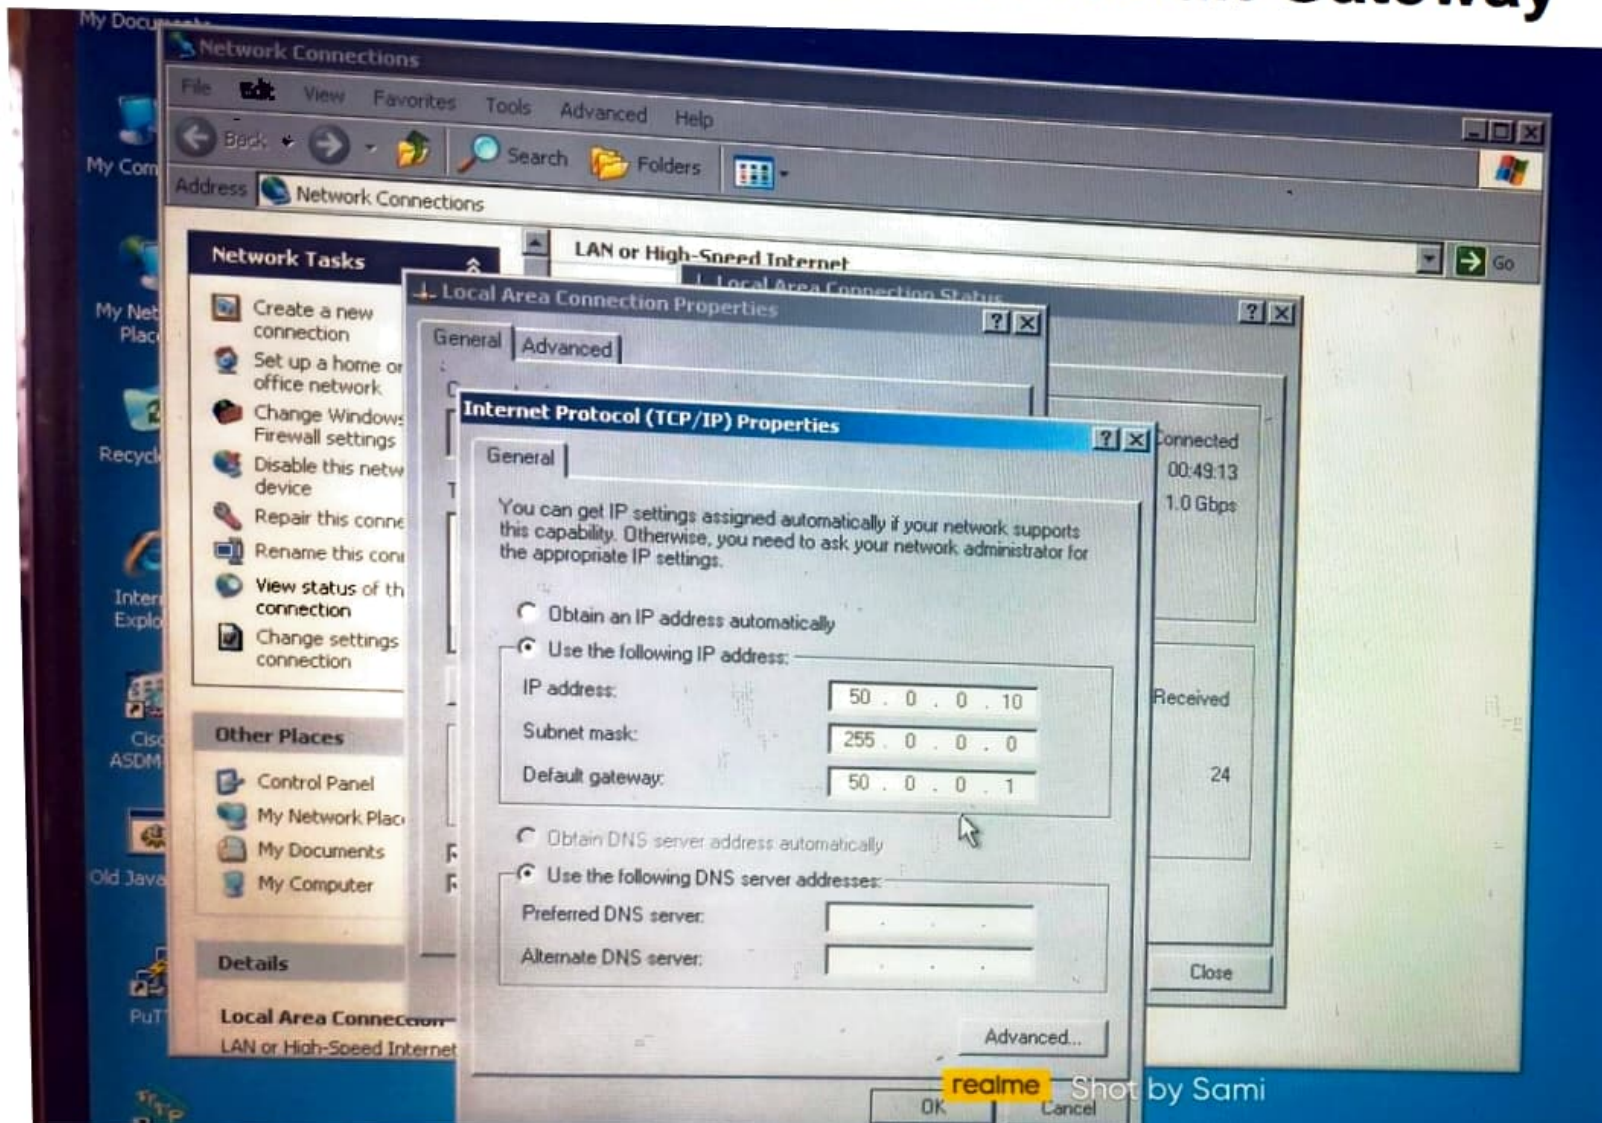

Step 3: PC-2 IP Address & Default Gateway

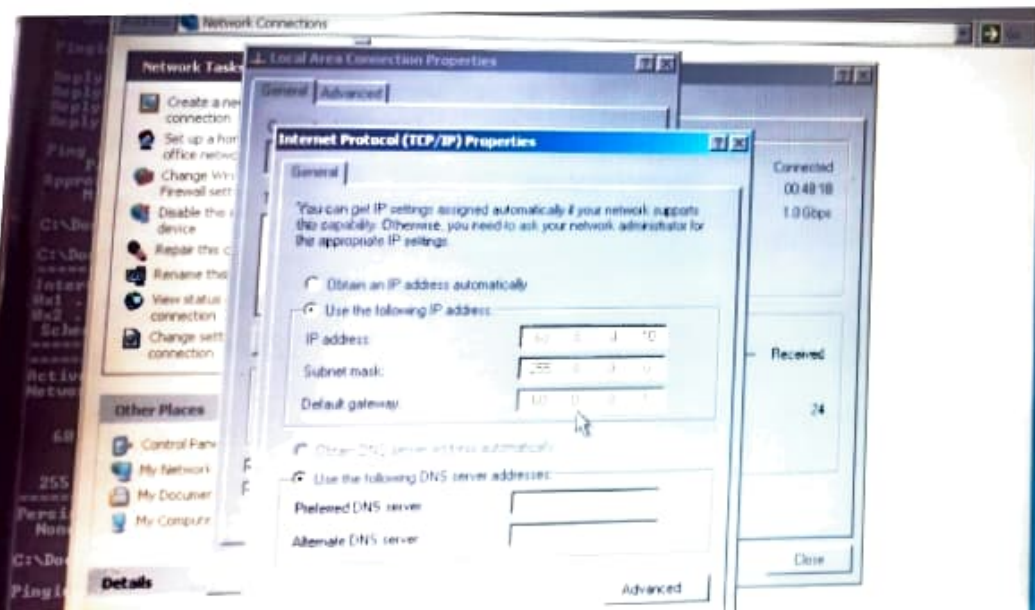

Step 4: Output - Ping from PC2 to PC1

```
60.0.0.10 255.255.255.255 127.0.0.1 127.0.0.1 10
60.255.255.255 255.255.255.255 60.0.0.10 60.0.0.10 10
127.0.0.0 255.0.0.0 127.0.0.1 127.0.0.1 1
224.0.0.0 240.0.0.0 60.0.0.10 60.0.0.10 1
255.255.255.255 255.255.255.255 60.0.0.10 60.0.0.10 1
=====
Persistent Routes:
None

C:\Documents and Settings\user>ping 50.0.0.10

Pinging 50.0.0.10 with 32 bytes of data:

Reply from 50.0.0.10: bytes=32 time=3ms TTL=127
Reply from 50.0.0.10: bytes=32 time<1ms TTL=127
Reply from 50.0.0.10: bytes=32 time<1ms TTL=127
Reply from 50.0.0.10: bytes=32 time<1ms TTL=127

Ping statistics for 50.0.0.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 3ms, Average = 1ms

C:\Documents and Settings\user>route delete 50.0.0.0

C:\Documents and Settings\user>route print
=====
Interface List
0x1 ..... MS TCP Loopback interface
0x2 ..50 86 5f 89 50 00 ..... Intel(R) PRO/1000 MT Network Connection - Packet
Scheduler Miniport
=====
Active Routes:
    Network Destination        Netmask          Gateway          Interface        Metric
    60.0.0.0                    255.0.0.0        60.0.0.10       60.0.0.10        10
    60.0.0.10                   255.255.255.255  127.0.0.1       127.0.0.1        10
    60.255.255.255              255.255.255.255  60.0.0.10      60.0.0.10        10
    127.0.0.0                   255.0.0.0        127.0.0.1       127.0.0.1        1
    224.0.0.0                   240.0.0.0        60.0.0.10       60.0.0.10        10
    255.255.255.255            255.255.255.255  60.0.0.10       60.0.0.10        1
=====
Persistent Routes:
None

C:\Documents and Settings\user>ping 50.0.0.10

Pinging 50.0.0.10 with 32 bytes of data:

Reply from 50.0.0.10: bytes=32 time=2ms TTL=127
Reply from 50.0.0.10: bytes=32 time=1ms TTL=127
Reply from 50.0.0.10: bytes=32 time=1ms TTL=127
Reply from 50.0.0.10: bytes=32 time=1ms TTL=127

Ping statistics for 50.0.0.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 1ms, Maximum = 2ms, Average = 1ms

C:\Documents and Settings\user>
```

Step 5: Output - Ping from PC1 to pc2

```
C:\Documents and Settings\user>route delete 60.0.0.0
C:\Documents and Settings\user>route print
Interface List
0x2 ..... 60.0.0.0 60.0.0.0 ..... VS TCP Logon\yk Interface
Scheduler Miniport
Active Routes:
Network Destination        Netmask          Gateway          Interface        Metric
60.255.255.255             255.255.255.255  60.0.0.1         {8}              1
255.255.255.255            255.255.255.255  255.255.255.255  {0}              1
Persistent Routes:
None
C:\Documents and Settings\user>ipconfig /all
C:\Documents and Settings\user>ping 60.0.0.10
Pinging 60.0.0.10 with 32 bytes of data:
Reply from 60.0.0.10: bytes=32 time=1ms TTL=128
Reply from 60.0.0.10: bytes=32 time=1ms TTL=128
Ping statistics for 60.0.0.10:
    Packets: Sent = 2, Received = 2, Lost = 0 (0% loss),
    Approximate round trip times in milliseconds:
        Minimum = 0ms, Maximum = 1ms, Average = 1ms
C:\Documents and Settings\user>
```