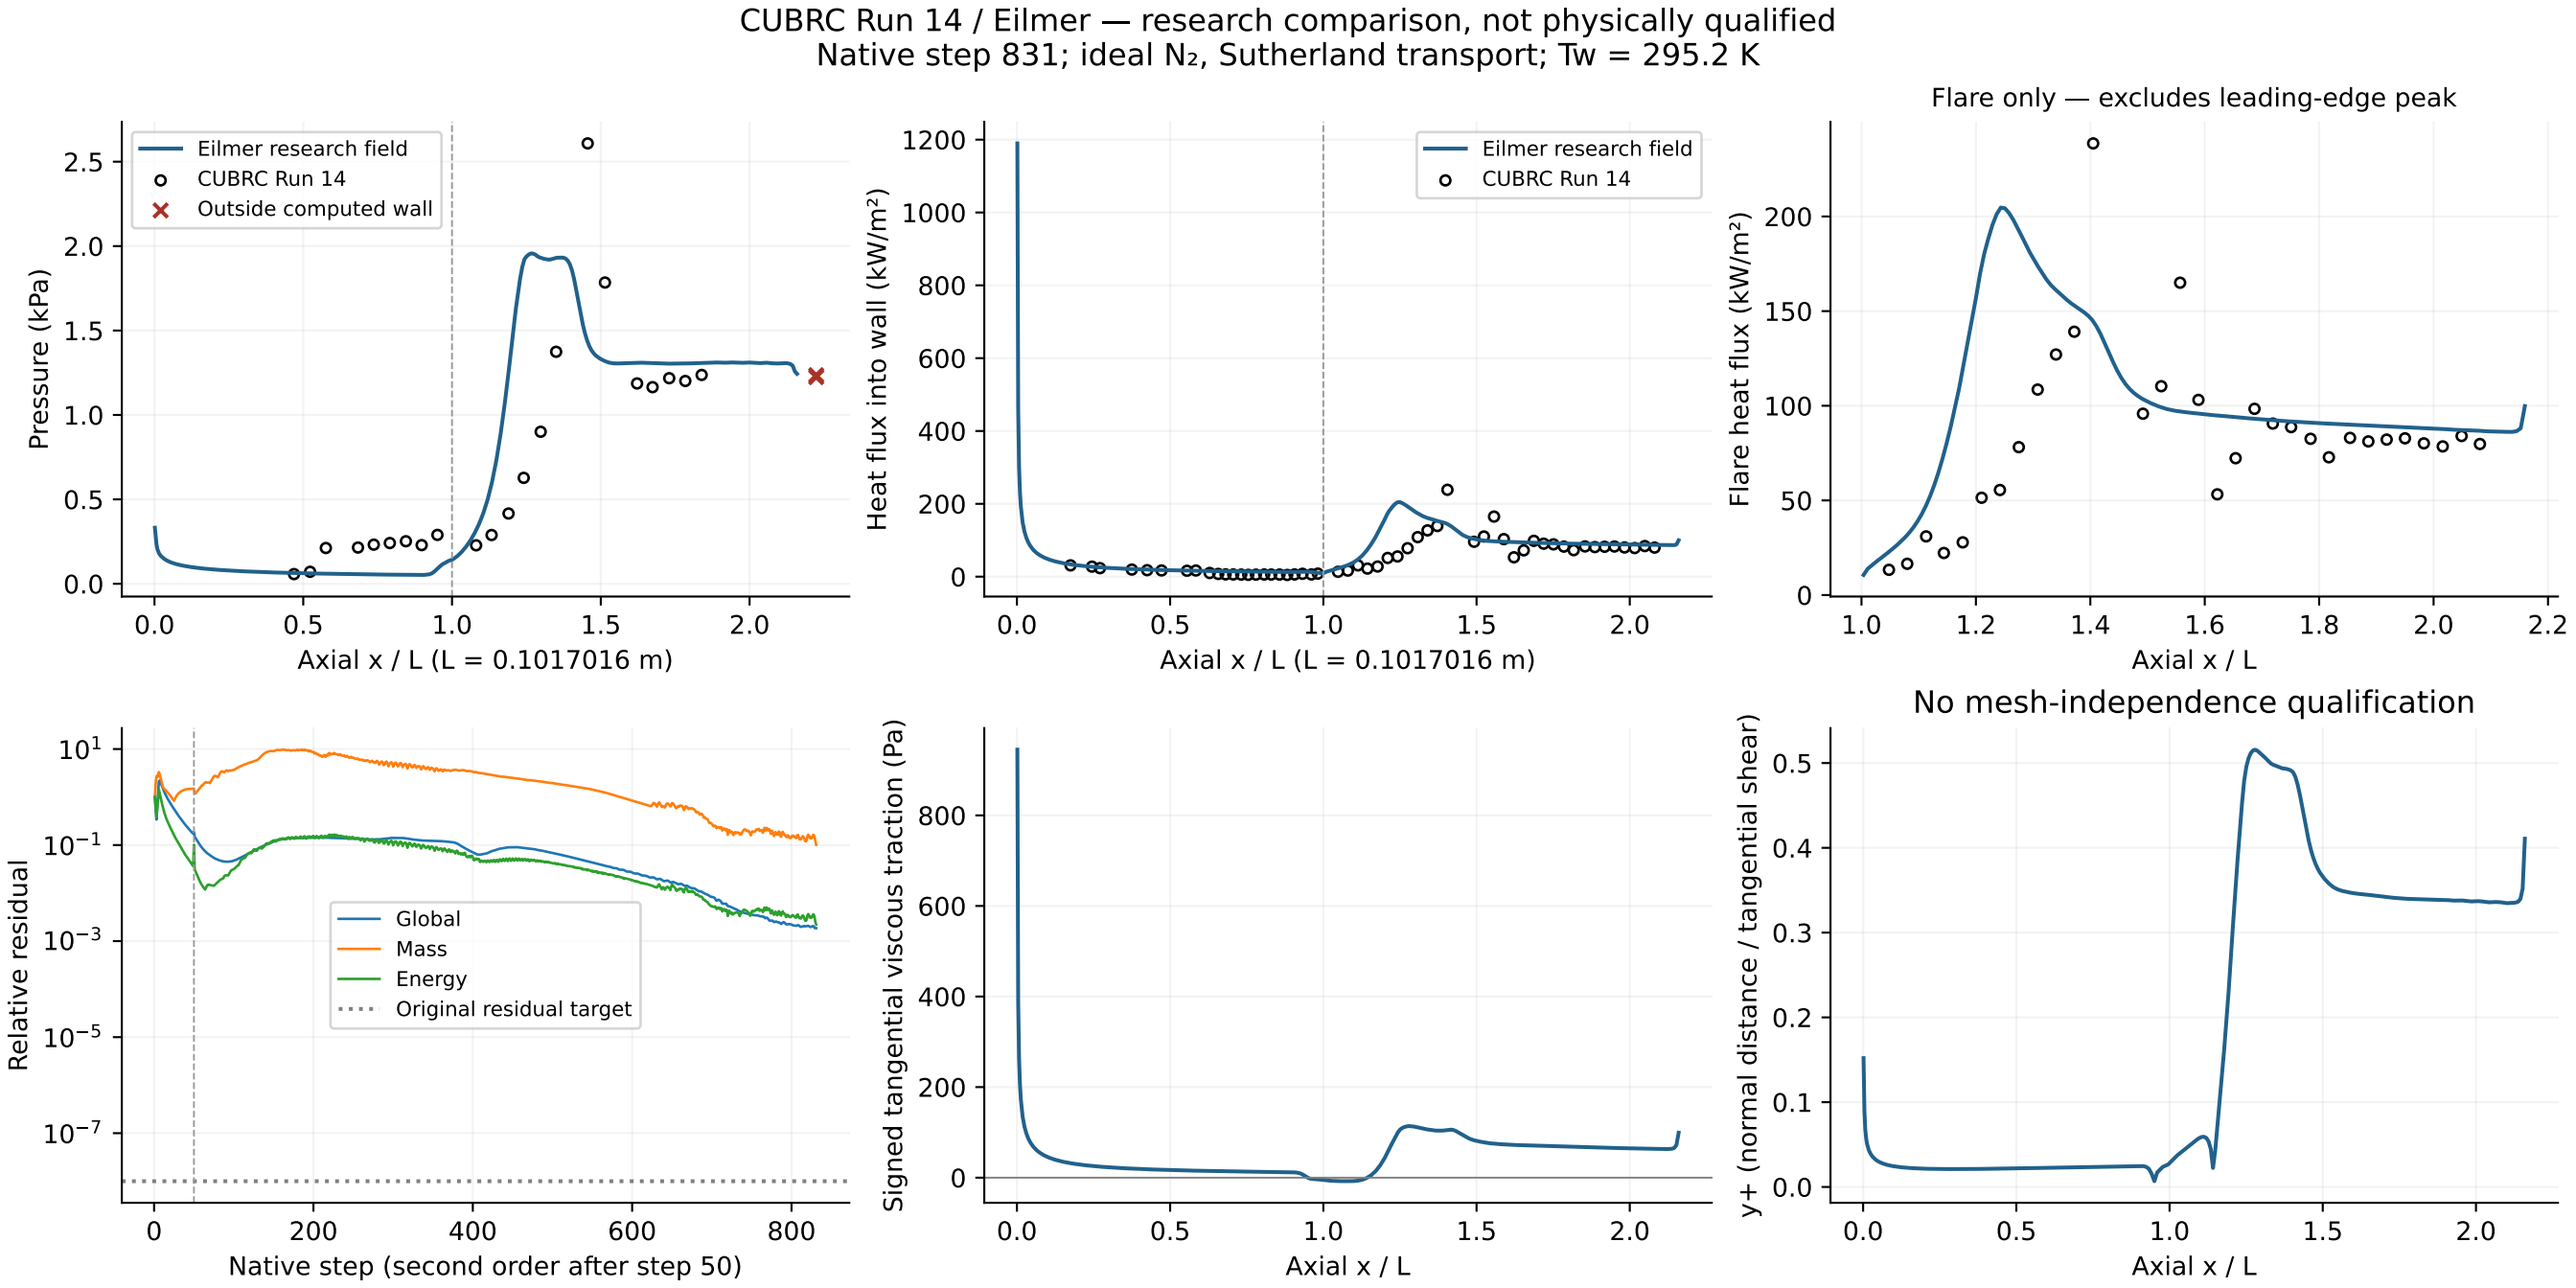
CUBRC Run 14 / Eilmer — research comparison, not physically qualified
Native step 831; ideal N₂, Sutherland transport; Tw = 295.2 K
Eilmer research field
CUBRC Run 14
Outside computed wall
Pressure (kPa)
Axial x / L (L = 0.1017016 m)
Heat flux into wall (kW/m²)
Flare only — excludes leading-edge peak
Flare heat flux (kW/m²)
Axial x / L
Global
Mass
Energy
Original residual target
Relative residual
Native step (second order after step 50)
Signed tangential viscous traction (Pa)
No mesh-independence qualification
y+ (normal distance / tangential shear)