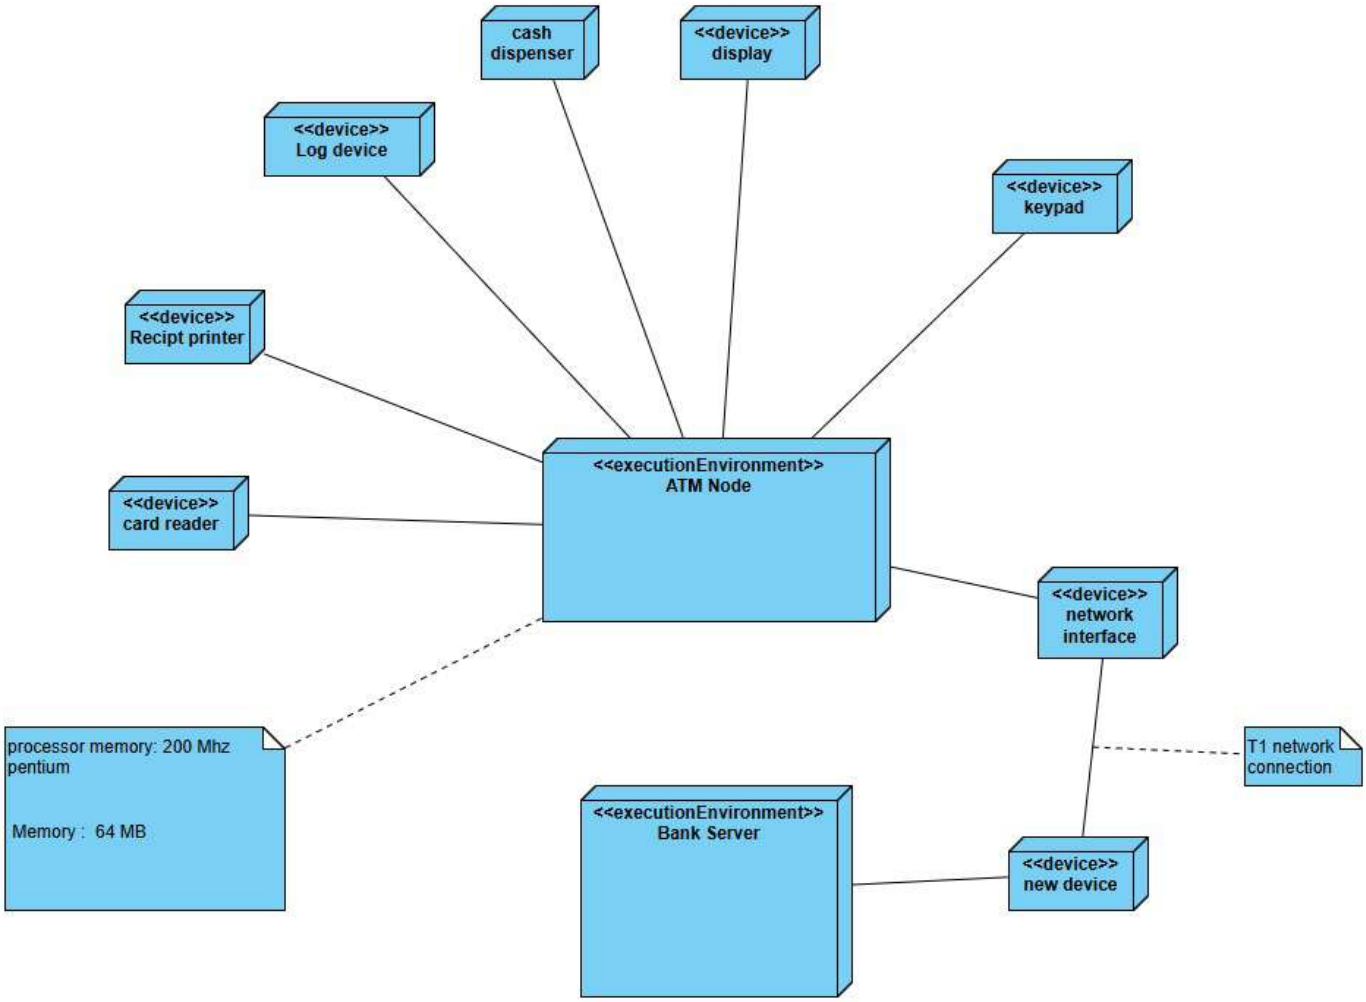
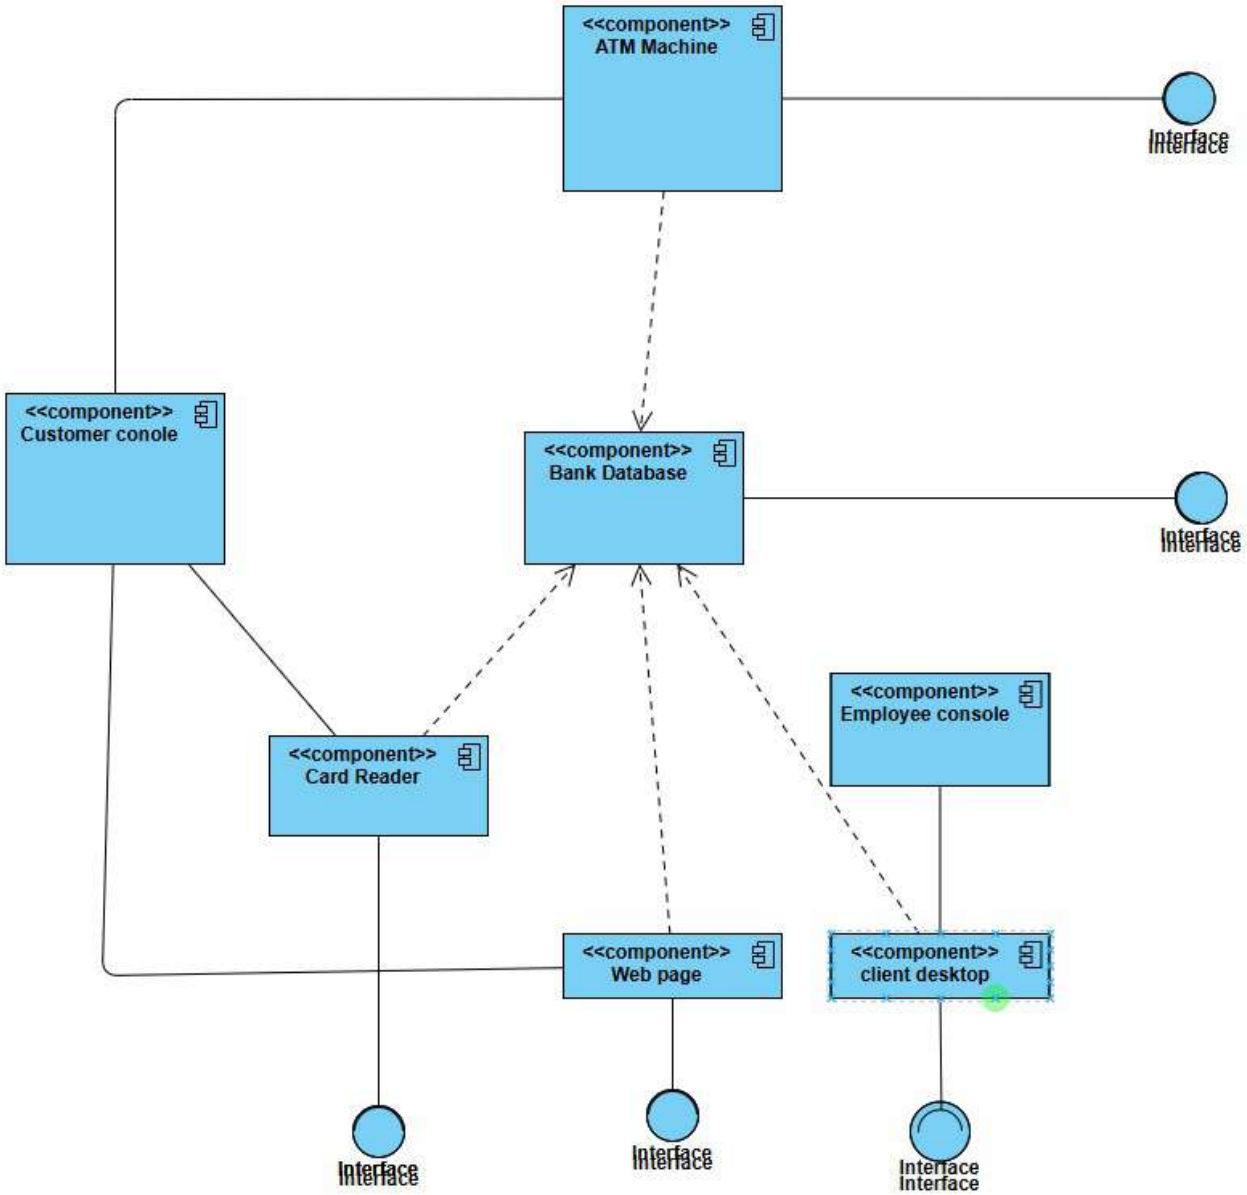
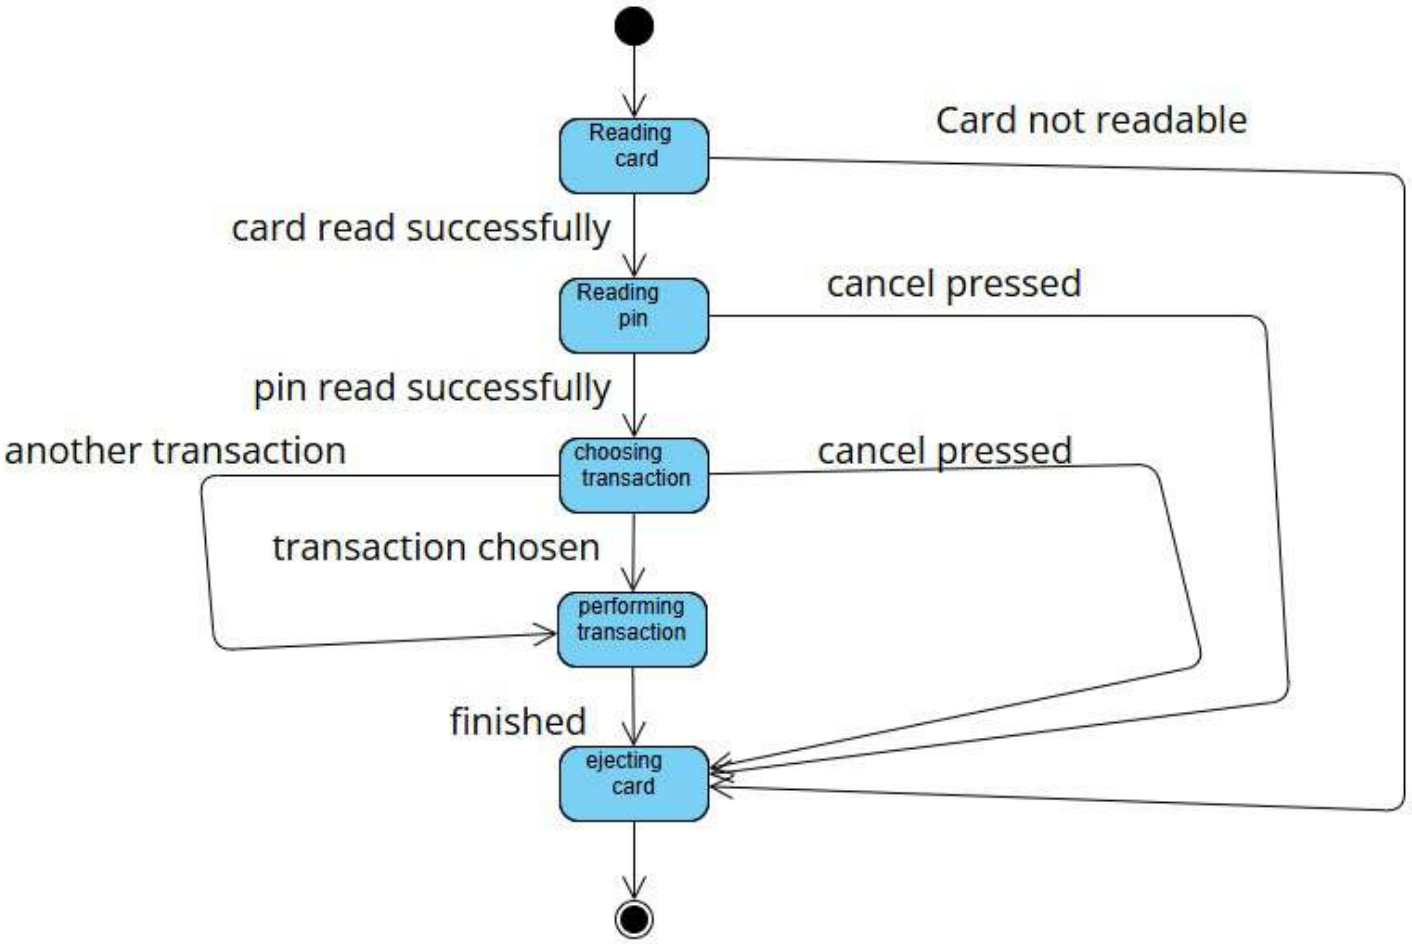

cash dispenser
<<device>> display
<<device>> Log device
<<device>> keypad
<<device>> Recipt printer
<<executionEnvironment>> ATM Node
<<device>> card reader
<<device>> network interface
processor memory: 200 Mhz pentium
Memory : 64 MB
T1 network connection
<<executionEnvironment>> Bank Server
<<device>> new device


<<component>>
ATM Machine
Interface
<<component>>
Customer conole
<<component>>
Bank Database
Interface
<<component>>
Employee console
<<component>>
Card Reader
<<component>>
Web page
<<component>>
client desktop
Interface
Interface
Interface


Reading card
Card not readable
card read successfully
Reading pin
cancel pressed
pin read successfully
another transaction
choosing transaction
cancel pressed
transaction chosen
performing transaction
finished
ejecting card