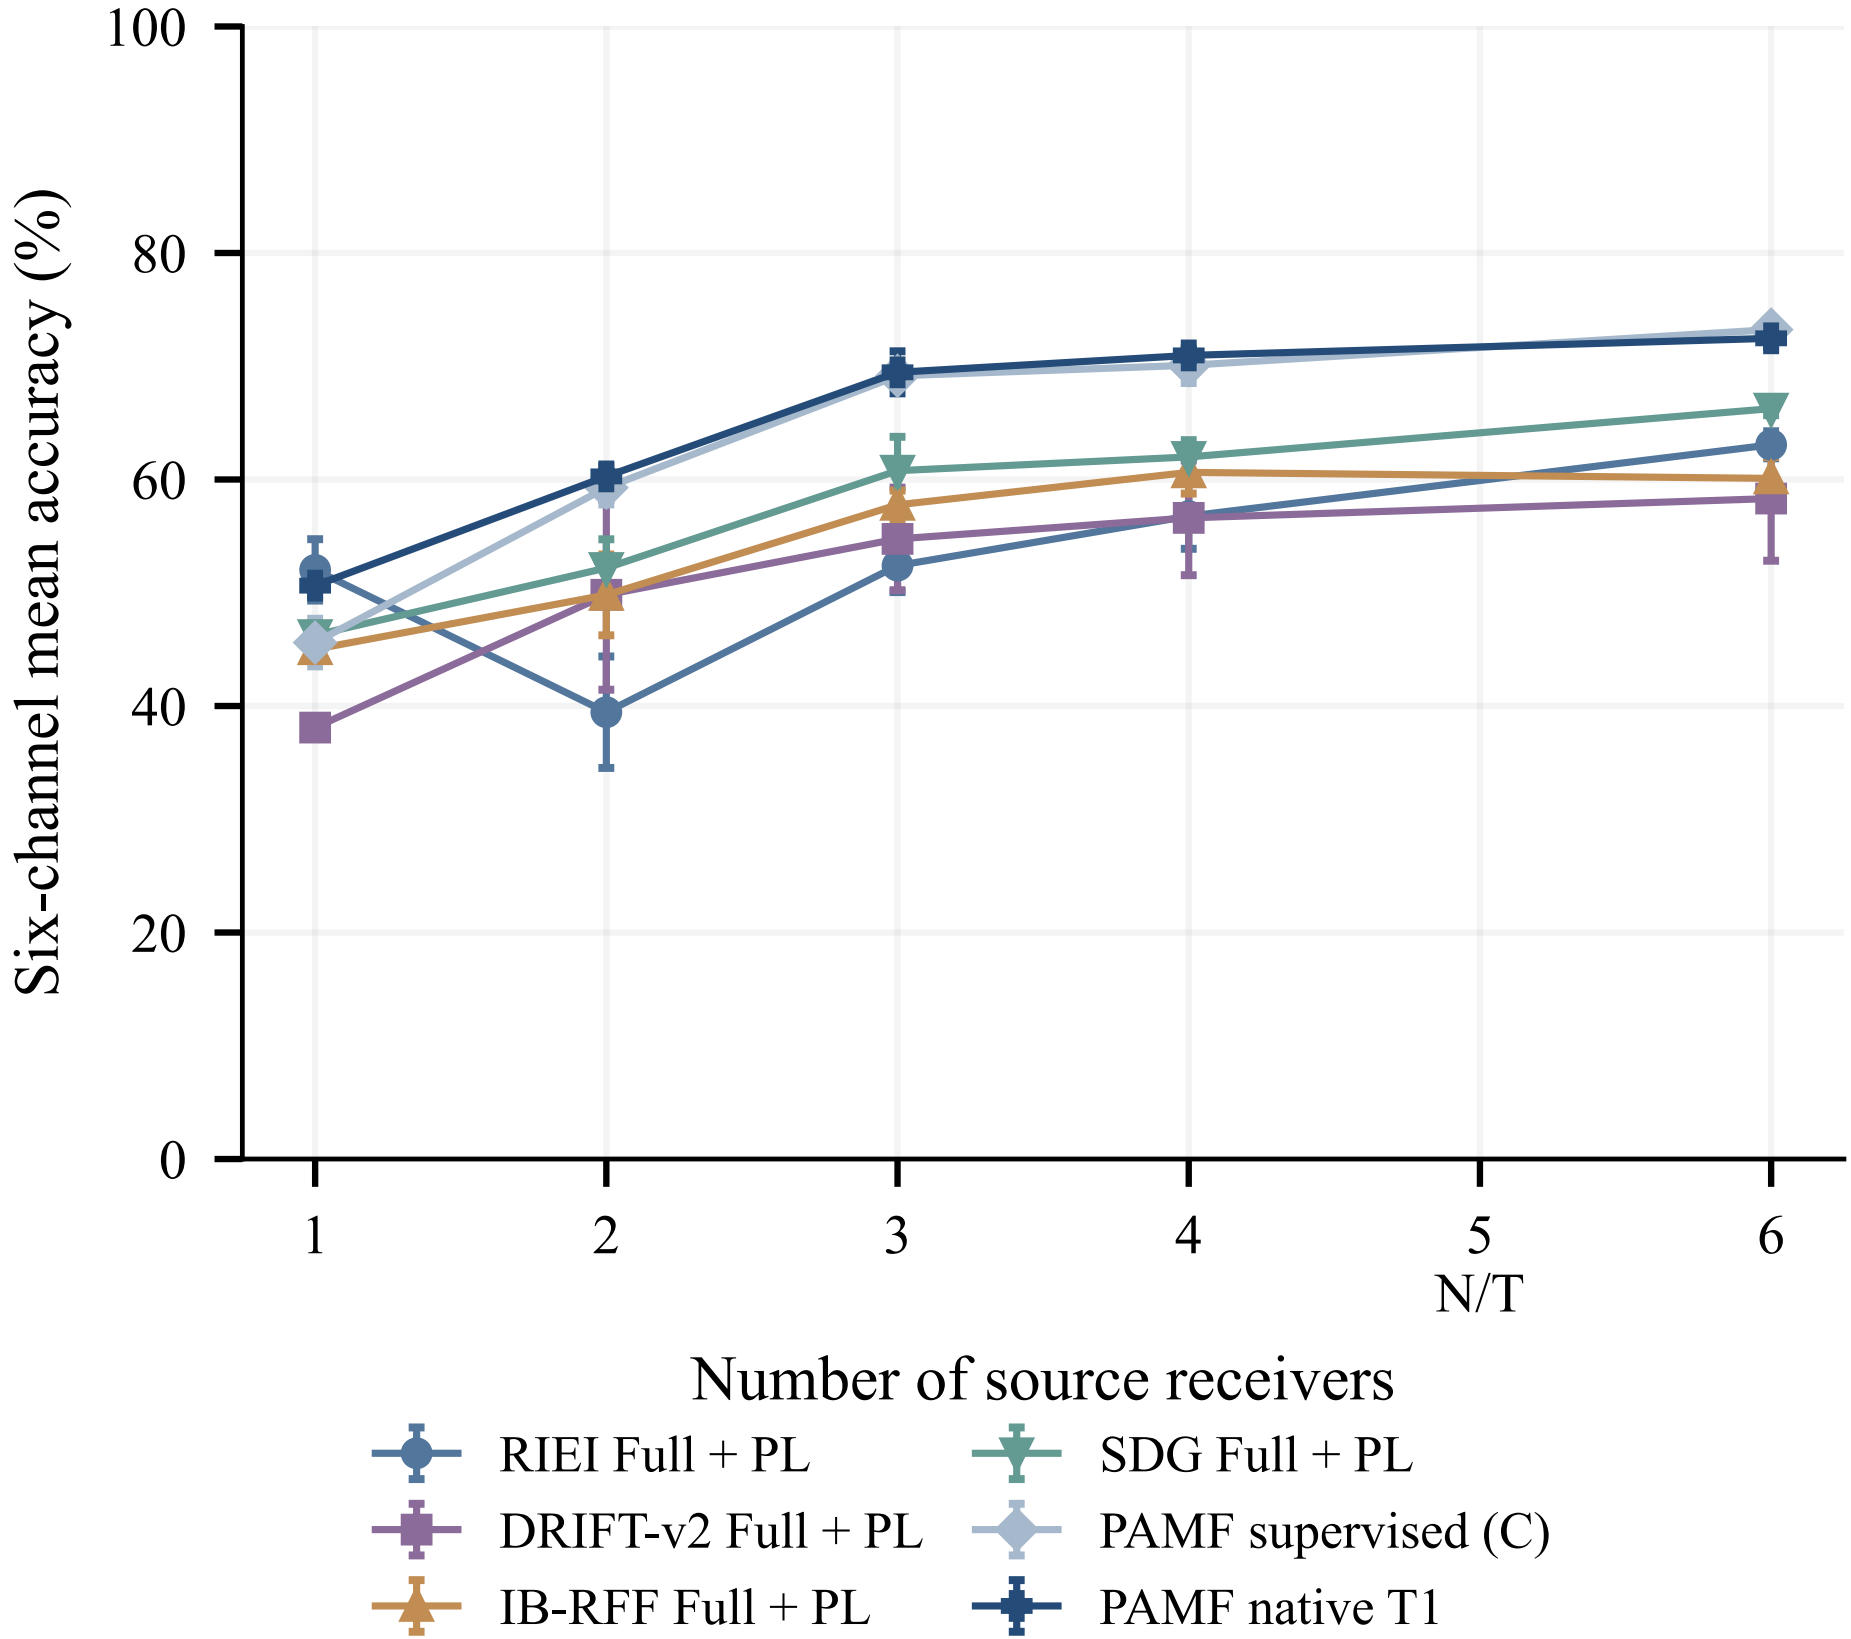
Six-channel mean accuracy (%)
100
80
60
40
20
0
1
2
3
4
5
6
N/T
Number of source receivers
RIEI Full + PL
SDG Full + PL
DRIFT-v2 Full + PL
PAMF supervised (C)
IB-RFF Full + PL
PAMF native T1