


Features

- Compact size, resin case.
- Improved safety and suppressing self heating.



Applications

- Switching power supply, Inverter and Servo power.

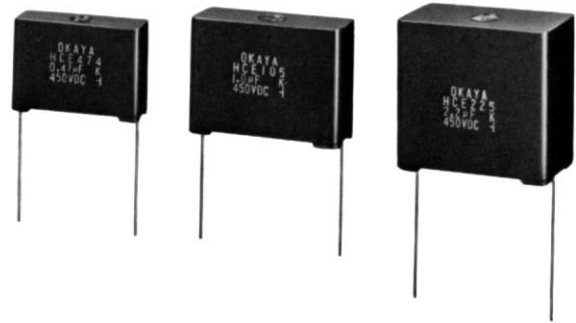

Dimensions

Circuit

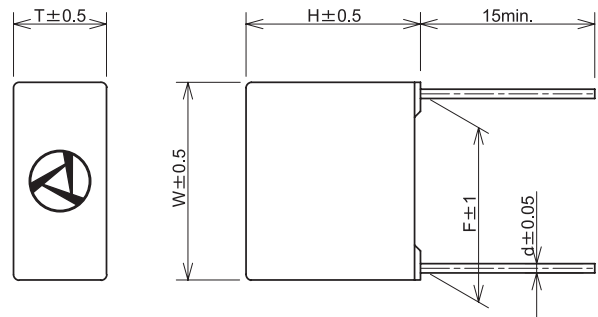

Unit: mm

Electrical Specifications

Operating Temperature: -40 ~ +105°C

Rated Voltage Capacitance		4 5 0 V					6 3 0 V					Dissipation factor	Test voltage	Insulation resistance			
PART NO.	μ F	W	T	H	F	d	W	T	H	F	d						
104	0.1					0.8	17.0	8.0	15.0	15.0	0.8	0.01max (at 1000± 100Hz)	Rated Voltage × 1.75 (2~5sec)	15000M Ω min.			
154	0.15						25.0	6.5	16.0	22.5							
224	0.22	17.0	8.0	15.0	15.0		25.0	8.0	17.5	22.5							
334	0.33	25.0	6.5	16.0	22.5		25.0	10.0	19.5	22.5							
474	0.47	25.0	8.0	17.5	22.5		30.0	11.0	22.0	27.5				5000 Ω F min. (at 20℃ 100V _{DC})			
684	0.68	25.0	10.0	19.5	22.5		30.0	13.5	24.5	27.5							
105	1.0	30.0	11.0	22.0	27.5		30.5	16.0	28.0	27.5	1.0						
155	1.5	30.0	13.5	24.5	27.5		41.0	15.5	28.0	37.5							
225	2.2	30.5	16.0	28.0	27.5		41.0	17.5	32.5	37.5							

Model Numbering System

