



packing: min-PF vs min-BW orientation (BL)

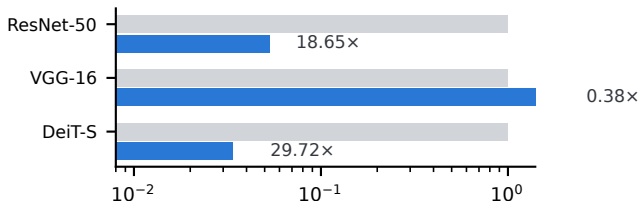

mapping: maxES vs minCC start (BL, paired)

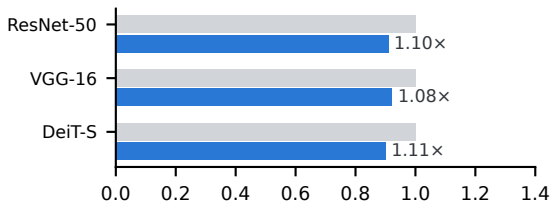

routing: DP and DPN vs BL

