SAKURA SHOTEN / SITE CORRECTION / REV C

CAD first: rotated roof-only stair / millimetres / 23 October 2026 / opt-in game candidate

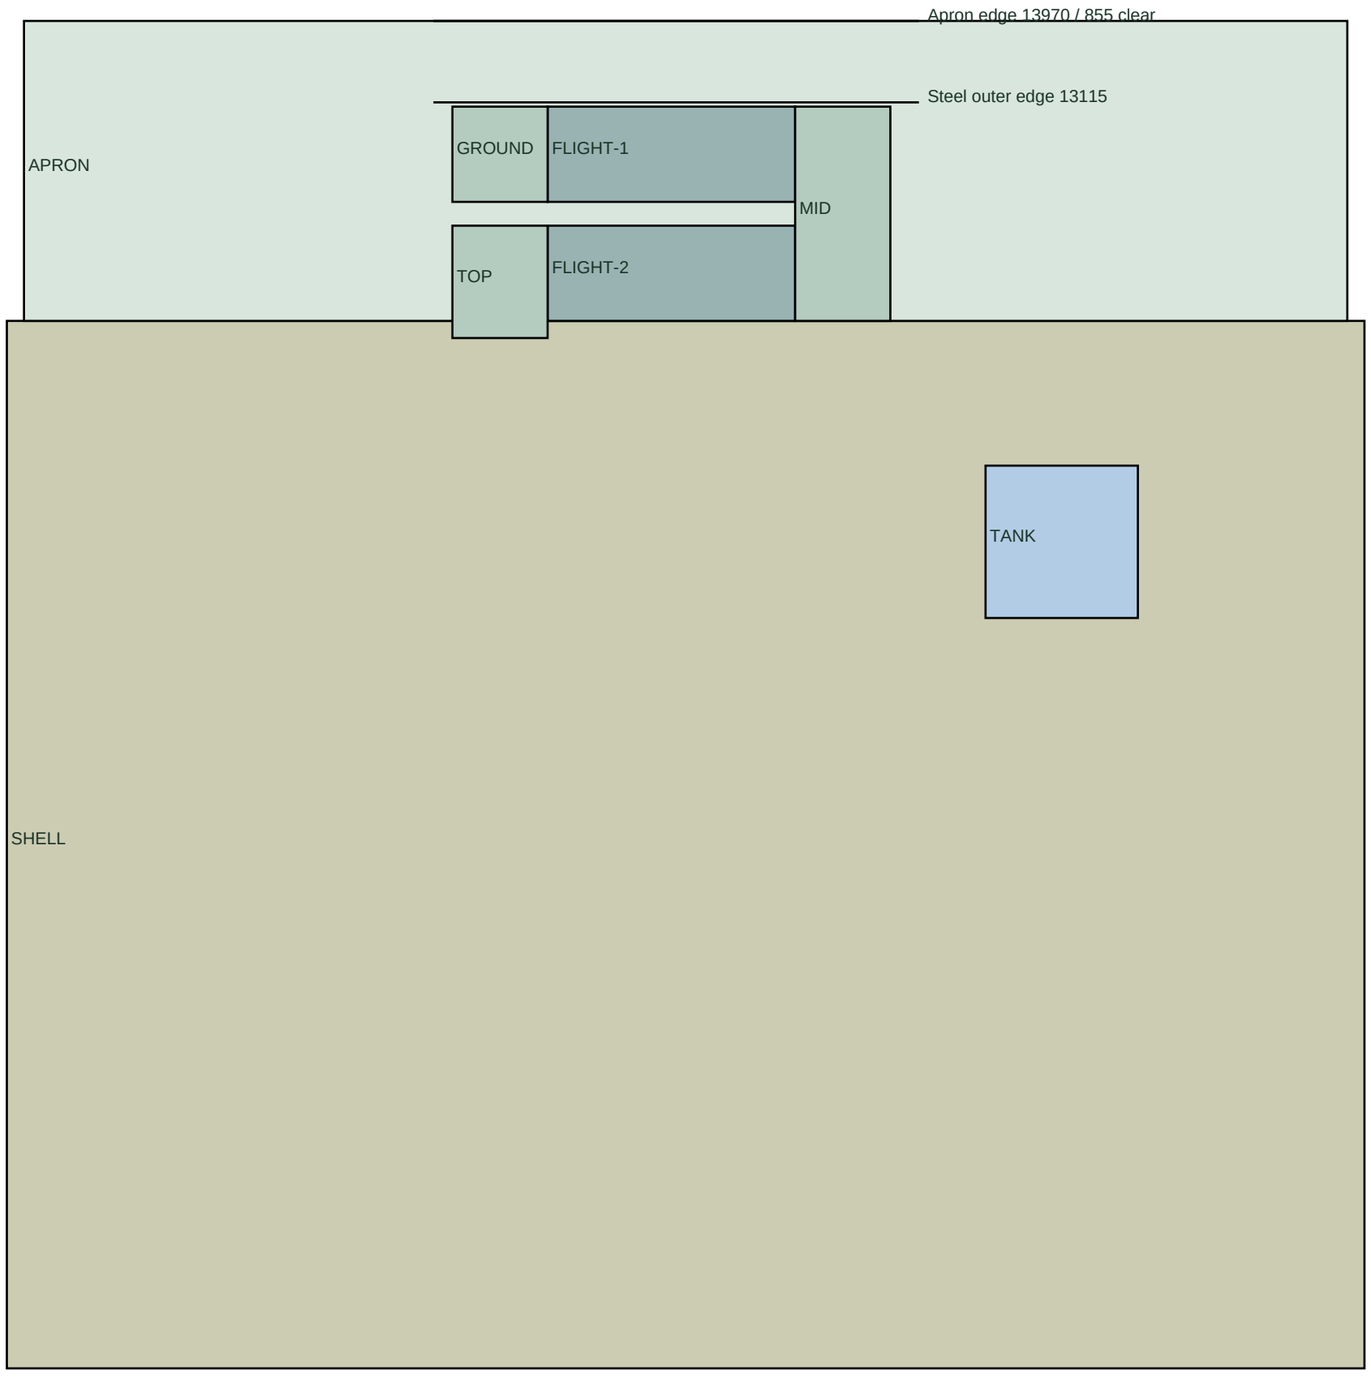

CHECKED BEFORE CONSTRUCTION

Outer shell: 14260 x 11000; roof +4010; one storey.

Town: X -18.45 to -7.45 / Z -34.43 to -20.17.

CAD SW internal corner: world X -7.63 / Z -20.35.

Old 4600 mm projection conflicts with the circuit.

Rotate U-stair: 4600 along wall x 2250 out.

Flights: 1000 tread / 956 between rails / 22 rises x 182.273 = 4010.

10 goings x 260 per flight; midpoint +2005.

Existing apron: 3150 out; outer passage 855 incl. steel.

Stair Z -29.45 to -24.85 stays within apron bay.

Delivery: CAD X10975-12025, clear of stair.

Move condensers to CAD X3200-4200, clear of bikes.

Remove obsolete upper shell and old escape ladder.

Four A2 posters retain all 20 wall notice positions.

No new roof entry prompt or traversable stair.

Real engineering and statutory certification excluded.