SK-ST-002 Sakura stairwell trim: strings, handrail, skirting, nosing, fittings rev B 27 October 2026

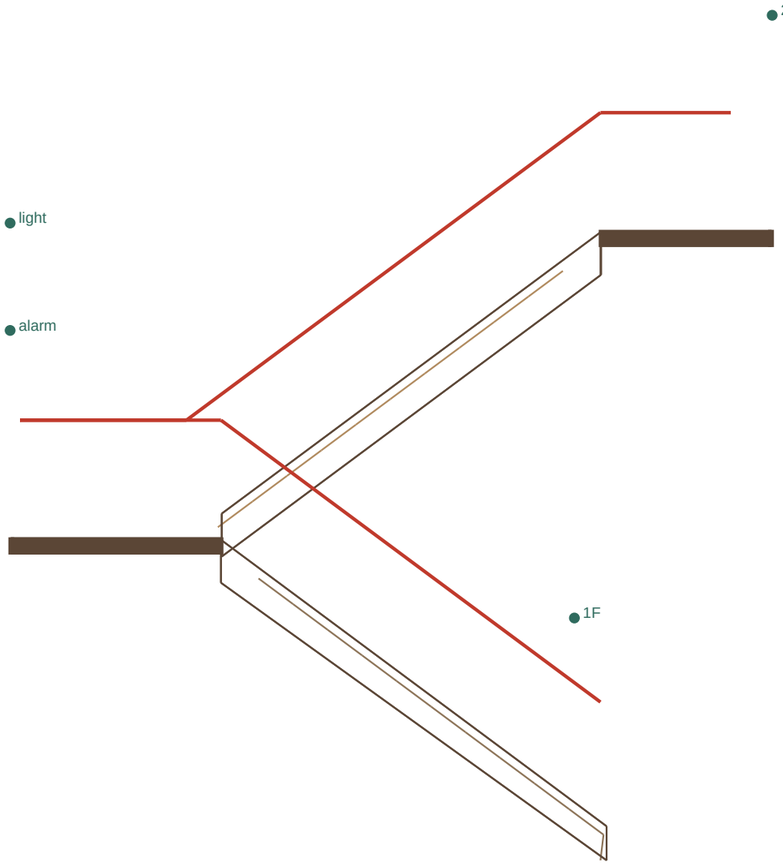

Section looking north 1:40 (both flights overlaid). Brown: nosing lines; dark: strings and skirting; red: the handrail, 850 mm over the nosing line.

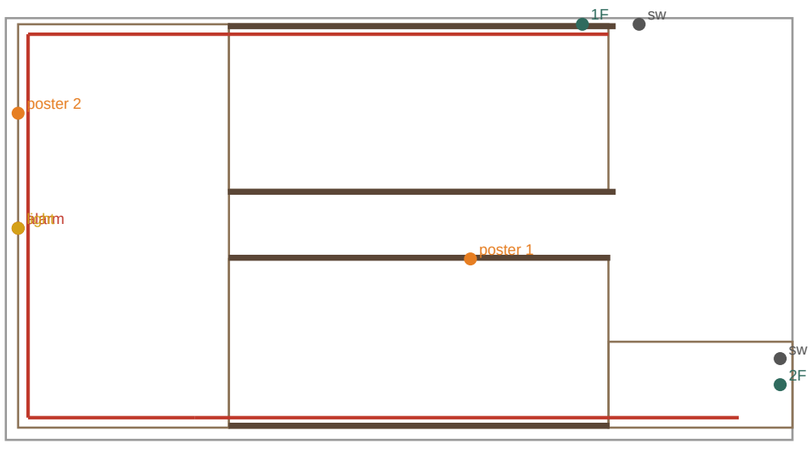

Plan 1:40. Dark: strings. Red: the handrail centre line. Dots: plates, fire alarm, stair light, switches.

Why each piece is there:
- Strings: a closed string each side of each flight, the treads housed in it; no step end shows.
- Handrail: one continuous wall rail (a stair must have one; staff carry stock up it), 40 mm, 65 mm off the wall, on brackets about every metre, round the landing on its three walls, over the top landing to the hall.
- Skirting where the landings meet the walls; non-slip nosing on all 22 treads.
- Rev B: no door in the stair (rev A's cupboard door opened onto the 450 mm well). Instead the shop's campaign poster with Pixar Thuan (SP-NK-001's print, B2) is pinned up twice: between the flights and on the landing.
- The stair head in the office hall: a balustrade (newel posts, handrail, balusters) for the solid board.
- 1F and 2F plates where each floor starts; the stair light on the landing wall and a switch at each end; the fire alarm (lamp, bell, button) on the landing: the office's way out is down this stair.
- Office storey: the stairwell's west wall now runs to the ceiling (the office floor west of it showed as a slab floating on the landing wall).

Checks (checks-trim.json):
PASS handrail 800..900 mm over the nosing line on both flights (850, 850, 850, 850)
PASS handrail 32..45 mm across (40 mm)
PASS a hand fits between rail and wall (40 mm clear or more) (45 mm)
PASS a bracket at least every metre
PASS one continuous rail, foot to top landing
PASS string 1 stands 60..80 mm over the nosing line
PASS string 2 stands 60..80 mm over the nosing line
PASS string 3 stands 60..80 mm over the nosing line
PASS string 4 stands 60..80 mm over the nosing line
PASS lower treads housed between their strings
PASS upper treads housed between their strings
PASS non-slip nosing 4 mm proud (clear of the 2 mm rule)
PASS 1F plate clear of the handrail (345 mm)
PASS 2F plate clear of the handrail (723 mm)
PASS fire alarm clear of the handrail (589 mm)
PASS stair light clear of the handrail (1287 mm)
PASS switch 1 clear of the handrail (269 mm)
PASS switch 2 clear of the handrail (577 mm)
PASS poster 1 clear of the handrail (1465 mm)
PASS poster 1 wholly on the wall between the flights, under the upper flight (top 2.26 m, flight above 3.14 m)
PASS poster 2 clear of the handrail (279 mm)
PASS poster 2 on the landing wall, clear of the alarm
PASS stair-head balustrade at least 900 mm high (950 mm)
PASS balustrade gaps under 110 mm (a child's head does not pass) (90 mm, 10 balusters)
PASS no two faces in one plane: shop, office and the strict zones ({"shop": 0, "office": 0, "zones": 0})