





MAN7-EBM Inventor Management_Mobisys

How to Configure Mobisys Devices and Connect to SAP



Mobisys Configuration Process

- In the Initial Mobisys Menu, click on “Settings”

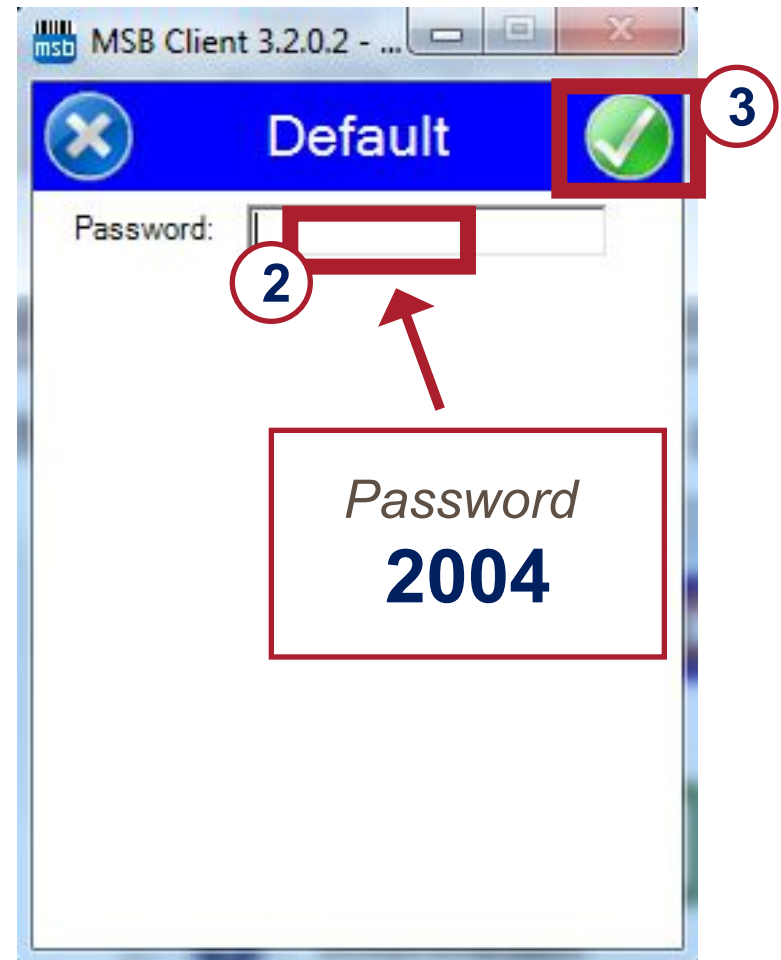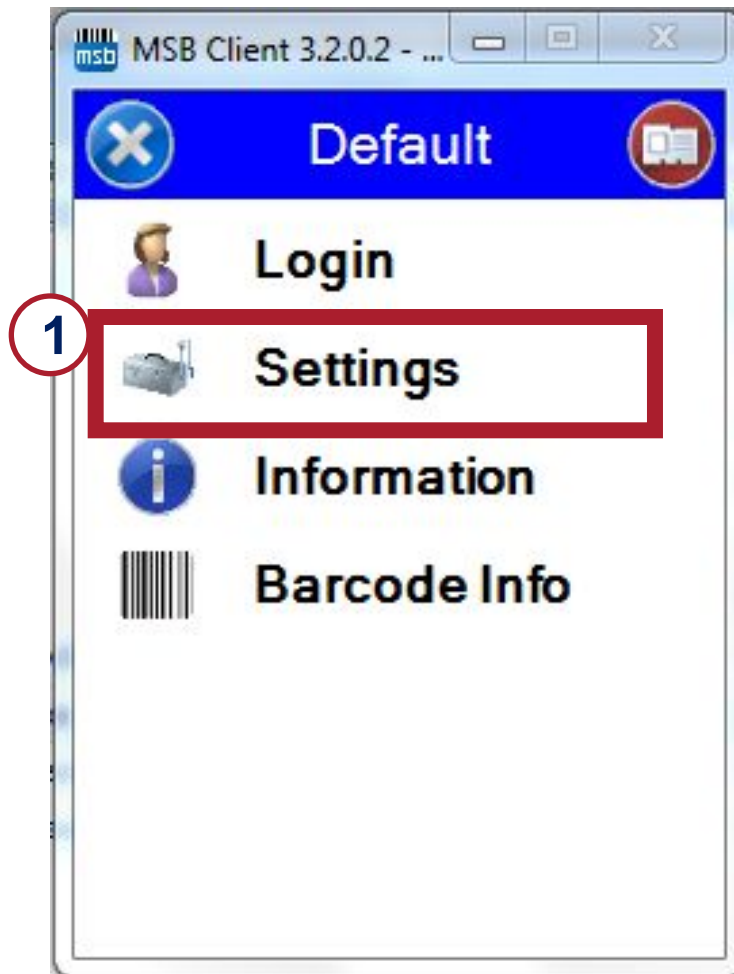

Mobisys Configuration Process


- Go to “Connection”, and complete the fields:
 - SAP Host IP: specific value for each SAP System (see next slide)
 - Port: Specific value for each SAP System (see next slide)
 - Services: /MOBISYS/MSB_SAPUSER

The image displays three screenshots from the MSB Client 3.2.0.2 application, illustrating the configuration steps:

- Settings Screen:** The 'Connection' icon is highlighted with a red box and the number 4.
- Connection Screen:** The 'Connection' screen shows fields for Device ID, SAP Host IP, Port, and Service. The 'Connection Test' button is highlighted with a red box and the number 6.
- Test Connection Screen:** The 'Test Connection' screen shows the result of the test: 'Connection data was successfully tested (Server: SAP NetWeaver Application Server / ABAP 701)'. The 'OK' button is highlighted with a red box and the number 7.

Mobisys Configuration Process

- Go Back and Enter in the “MBS”
 - Complete Language and Application **HO1**

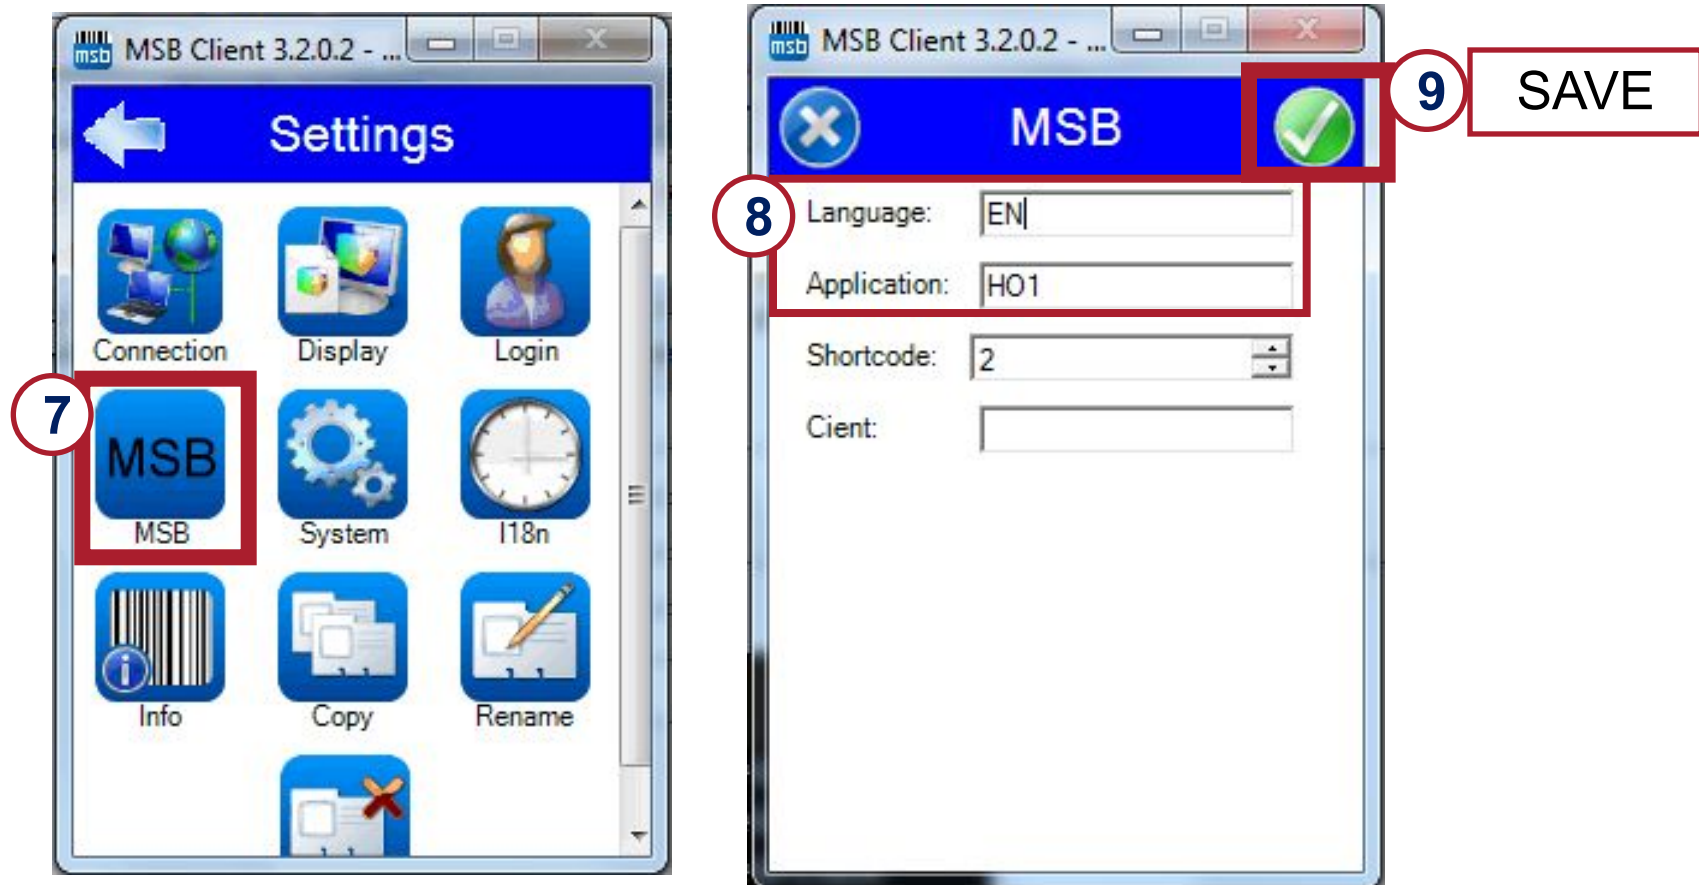

Mobisys Configuration Process

SAP System Settings

System	Mandt	SAP Host IP	Port	Service
DR1	300	10.197.54.8	8000	/MOBISYS/MSB_SAPUSER3
QR1	200	10.197.199.14	8010	/MOBISYS/MSB_SAPUSER
QR2	200	10.197.54.12	8030	/MOBISYS/MSB_SAPUSER
QR5	200	10.197.54.27	8060	/MOBISYS/MSB_SAPUSER
PR1	200	10.198.252.79	8000	/MOBISYS/MSB_SAPUSER
QRD	200	10.10.3.107	8000	/MOBISYS/MSB_SAPUSER
PRD	200	10.10.3.128	8000	/MOBISYS/MSB_SAPUSER

Summary

Questions / Doubts

Comments



Summary

CONGRATULATIONS



THANK YOU FOR YOUR ATTENTION



LafargeHolcim