


SPECIFICATIONS MODEL 57HS82-3008B


PHASE	STEP ANGLE	CONNECTION TYPE	CURRENT	RESISTANCE	INDUCTANCE	HOLDING TORQUE		VOLTAGE	WEIGHT
	DEG/STEP		AMPS	ohms $\pm 10\%$	mH $\pm 20\%$	Nm	oz in	VOLTS	KG
2	1.8	PARALLEL	4.2	0.70	2.5	2.2	311.5	2.94V	1.2
2		SERIES	2.1	2.8	10.0	2.2	311.5	5.88V	
4		UNIPOLAR	3.0	1.4	2.5	1.6	226.6	4.20V	

Dimension:
Unit=mm

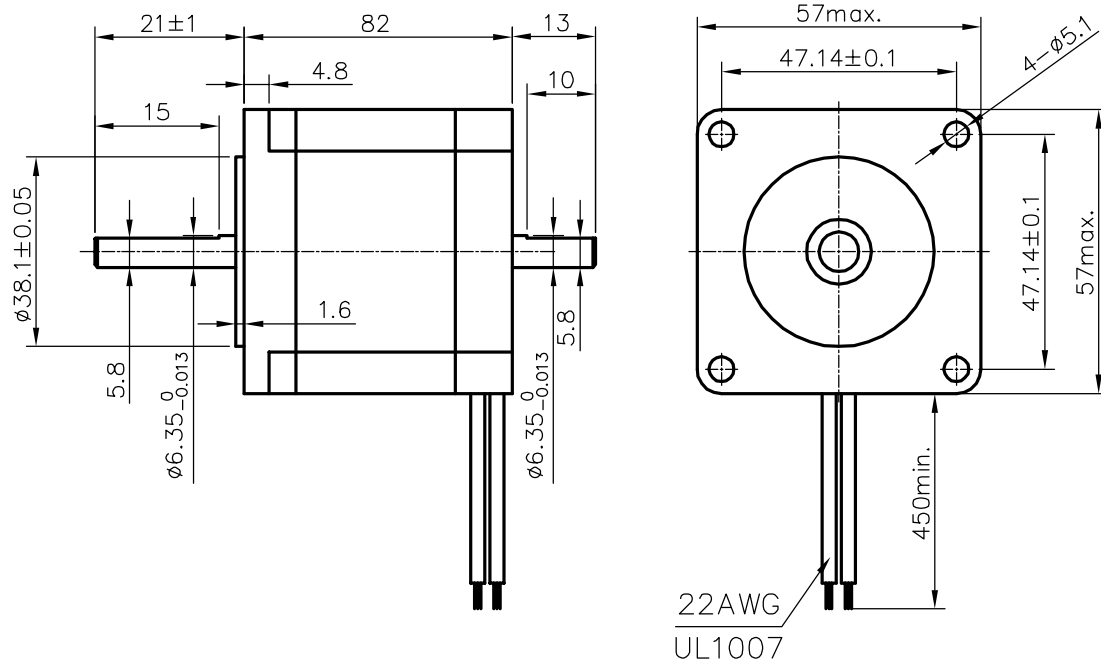


WIRING DIAGRAM

Bipolar Series

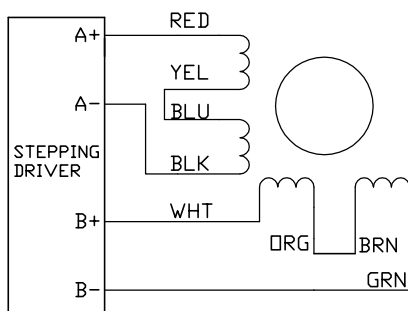

Bipolar Parallel

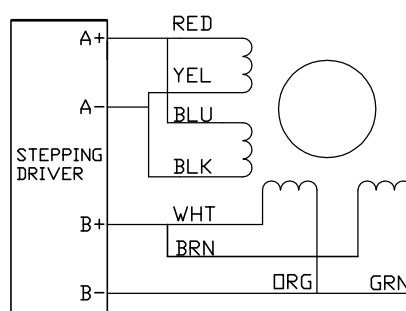

Unipolar

