

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0543630478](#)
Status: **Obsolete**
Description: 0.50mm (.020") Pitch SlimStack™ Receptacle, Surface Mount, Dual Row, Vertical, 2.00 and 3.00mm (.079 and .118") Stacking Heights, with Solder Tabs, 40 Circuits, Lead-free

Documents:
[Drawing \(PDF\)](#)


General
Product Family PCB Receptacles
Series [54363](#)
Application Board-to-Board, Signal
Comments Solder Tab Plating: Lead-Free, Tin
Product Name SlimStack™

Physical
Circuits (Loaded) 40
Color - Resin Black
Durability (mating cycles max) 30
Glow-Wire Compliant No
Mated Height 2.00mm (.079")
Material - Metal Phosphor Bronze
Material - Plating Mating Gold
Material - Plating Termination Gold
Material - Resin High Temperature Thermoplastic
Number of Rows 2
Orientation Vertical
PCB Locator No
PCB Retention Yes
PCB Thickness - Recommended 1.60mm (.063")
Packaging Type Embossed Tape on Reel
Pitch - Mating Interface 0.50mm (.020")
Pitch - Termination Interface 0.50mm (.020")
Plating min - Mating 0.254µm (10µ")
Plating min - Termination 0.102µm (4µ")
Polarized to PCB No
Surface Mount Compatible (SMC) N/A
Temperature Range - Operating -25°C to +85°C
Termination Interface: Style Surface Mount

Electrical
Current - Maximum per Contact 0.5A
Voltage - Maximum 50V

Material Info

Reference - Drawing Numbers
Product Specification PS-54363-043, PS-54363-044, PS-54363-045, RPS-54363-044, RPS-54363-047
Sales Drawing SD-54363-038, SD-54363-039

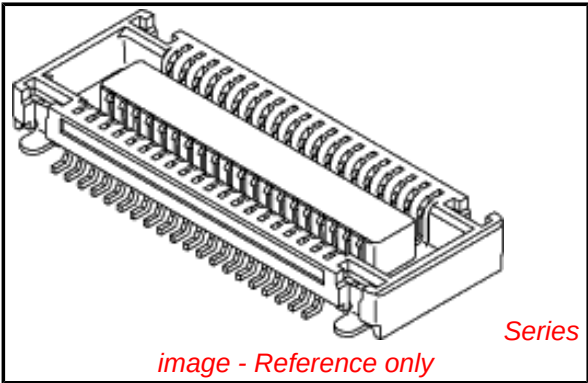

EU RoHS
ELV and RoHS
Compliant
REACH SVHC
Contains SVHC: No
Low-Halogen Status
Not Reviewed

China RoHS



Need more information on product environmental compliance?
Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)
Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series
[54363Series](#)

Mates With
[55201](#) PCB Header, [55650](#) PCB Header