




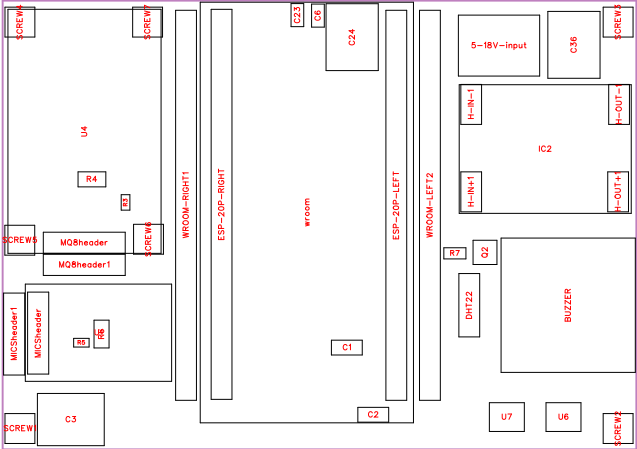

No.	Quantity	Comment	Designator	Footprint	Value	Manufacturer Part	Manufacturer	Supplier Part	Supplier	Unique ID	JLCPCB Part Class
1	1	MX126-5.0-0 2P-GN01-Cu-S-A	5-18V-input	CONN-TH_2 P-P5.00_MX 126-5.0-GN0 1-02P-CU-S-A		MX126-5.0-0 2P-GN01-Cu-S-A	MAX(迈旭)	C5188434	LCSC	UNIQUE3CD165_1	Extended Part
2	1	4kHz	BUZZER	BUZ-TH_BD 17.0-P10.00-D0.9	4kHz	HNR-1707	华能	C129400	LCSC	gge18	Extended Part
3	2	100nF	C1,C2	C0805	100nF	CC0805KRX7R9BB104	YAGEO(国巨)	C49678	LCSC	gge23,gge24	Basic Part
4	2	470uF	C3,C36	CAP-SMD_B D6.3-L6.6-W 6.6-FD	470uF	RVT1A471M0607	ROQANG(容强)	C2858856	LCSC	C36,C36_0	Extended Part
5	1	100nF	C6	C0603		TCC0603X7R104K500CT	CCTC	C282519	LCSC	c6	ExtendedPart
6	1	10uF	C23	C0603		CL10A106MP8NNNC	SAMSUNG	C85713	LCSC	c23	ExtendedPart
7	1	220uF	C24	CAP-SMD_B D6.3-L6.6-W 6.6-FD	220uF	RVT220UF16V67RV0015	KNSCHA(科尼盛)	C2887273	LCSC	c24	Extended Part
8	1	2.54-1*3P母	DHT22	HDR-TH_3P-P2.54-V-F		2.54-1*3P母	BOOMELE(博穆精密)	C146243	LCSC	gge21	Extended Part
9	2	PM2.54-1*20	ESP-20P-LEFT,ESP-20P-RIGHT	HDR-TH_20 P-P2.54-V-F		PM2.54-1*20	ZHOURI(洲日)	C5224030	LCSC	ESP-20P-LEFT,ESP-20P-RIGHT	Extended Part
10	4	PZ254V-11-0 2P	H-IN+1,H-IN-1,H-OUT+1,H-OUT-1	HDR-TH_2P-P2.54-V-M		PZ254V-11-0 2P	XFCN(兴飞)	C492401	LCSC	UNIQUE3C330F,UNIQUE7BAF5A,UNIQUEC2FFC0,UNIQUEF8E003	Extended Part
11	2	2.54-1*4P母	MICShheader,MQ8header	HDR-TH_4P-P2.54-V-F		2.54-1*4P母	BOOMELE(博穆精密)	C2718488	LCSC	gge14,gge14_0	Extended Part
12	1	SS8050(RANGE:200-350)	Q2	SOT-23-3_L2 .9-W1.3-P1.9 0-LS2.4-BR		SS8050(RANGE:200-350)	CJ(江苏长电/长晶)	C2150	LCSC	gge26	Basic Part
13	2	10kΩ	R3,R5	R0402	10kΩ	0402WGF1002TCE	UNI-ROYAL(厚声)	C25744	LCSC	gge4,gge7	Basic Part
14	2	20kΩ	R4,R6	R0805	20kΩ	0805W8F2002T5E	UNI-ROYAL(厚声)	C4328	LCSC	gge5,gge8	Basic Part
15	1	1k	R7	R0603				C21190	LCSC	gge6a2bc9228e8a4cd8	
16	2	SK6812MINI-HS	U6,U7	LED-SMD_4 P-L3.5-W3.5-BR_SK6812 MINI-HS		SK6812MINI-HS	OPSCO(欧思科)	C2922787	LCSC	gge31,gge31_0	Extended Part

LCSC Part Name	LCSC Assembly	JLCPCB Stock	JLCPCB Price	Layer	Category	Pins	LCSC Stock	LCSC Price	Add into BOM	Convert to PCB	3D Model Title	Device	Name
5mm 1x2P 排数:1 每排P数:2 直插		44614	0.0099	T		2			yes		CONN-TH_2 P-P5.00_MX 126-5.0-GN0 1-02P-CU-S-A	MX126-5.0-0 2P-GN01-Cu -S-A	MX126-5.0-0 2P-GN01-Cu -S-A
无源(外部驱动) 压电式 4kHz		2325	0.0233	T	Audio Products / Vibration Motors: Buzzers	2			yes		BUZ-TH_BD 17.0-H7.5-P1 0.0	HNR-1707	4kHz
100nF ±10% 50V		18201469	0.0029	T	Capacitors: Multilayer Ceramic Capacitors MLCC - SMD/SMT	2			yes		C0805_L2.0- W1.3-H1.3	CC0805KRX 7R9BB104	100nF
470uF ±20% 10V		34513	0.0069	T		2			yes		CAP-SMD_B D6.3-L6.6-W 6.6-FD	RVT1A471M 0607_C3359 82	470uF
		484147	0.0016	T		2			yes		C0603	100nF	100nF
		4641	0.0041	T		2			yes		C0603	10uF	10uF
220uF ±20% 16V		510199	0.0059	T		2			yes		CAP-SMD_B D6.3-L6.6-W 6.6-FD	RVT220UF1 6V67RV0015	220uF
间距:2.54mm 直插		34730	0.0097	T	Connectors: Female Headers	3			yes		HDR2.54-F-L I-1X3P	2.54-1*3P母	2.54-1*3P母
间距:2.54mm 1x20P 直插		2546	0.033	T		20			yes		HDR-F-2.54_ 1x20	PM2.54-1*20	PM2.54-1*20
间距:2.54mm 1x2P 直插 方针		1162514	0.0028	T		2			yes		HDR2.54-M- LI-1X2P	PZ254V-11-0 2P	PZ254V-11-0 2P
间距:2.54mm 1x4P 直插		114725	0.0118	T		4			yes		HDR-TH_4P- P2.54-V-F	2.54-1*4P母	2.54-1*4P母
hfe=200~350 NPN 电流:1.5A 电压:25V		1776105	0.0024	T	Transistors/Thyristors: Bipolar (BJT)	3			yes		SOT-23-3P L2.9-W1.3-H 1.0-LS2.4-P0 .95	SS8050(RANGE:200-350) _C2150	SS8050(RANGE:200-350)
厚膜电阻 10kΩ ±1%		23773324	0.0006	T	Resistors: Chip Resistor - Surface Mount	2			yes		R0402_L1.0- W0.5-H0.4	0402WGF10 02TCE	10kΩ
厚膜电阻 20kΩ ±1%		2735133	0.0007	T	Resistors: Chip Resistor - Surface Mount	2			yes		R0805_L2.0- W1.3-H0.6	0805W8F200 2T5E	20kΩ
		23927535	0.0004	T		2			yes		R0603	1k	1k
智能外控表面 贴装SMD型LED		89523	0.0148	T	Optoelectronics: RGB LEDs (Built-in IC)	4			yes		LED-SMD_4 P-L3.5-W3.5- BR_SK6812 MINI-HS	SK6812MINI- HS	SK6812MINI- HS

Symbol	Datasheet	Description
	https://atta.szlcsc.com/upload/public/pdf/source/20230914/2B012B5258BE925E2417FA81B30CB923.pdf	Structure:1x2P Pitch:5mm Color:Green Mounting Style:Straight Current Rating (Max):10A Voltage Rating (Max):300V Number of Pins:2P Number of Rows:1 Wire Gauge - AWG:14~26 Wire Gauge - AWG:14~26 Wire Gauge - mm2:2.5 Wire Gauge - mm2:2.5 Number of PINs Per R
	https://item.szlcsc.com/datasheet/HNR-1707/140686.html	Driver Circuitry:Passive (Externally Driven) Technology:Piezoelectric Voltage Rating:3V Voltage - Supply:1V~30V Voltage - Supply:1V~30V Frequency:4kHz Current Consumption:5mA Sound Pressure Level(SPL):80dB Diameter(φ D):17mm Length:- Width:- Height:8.3mm O
	https://item.szlcsc.com/datasheet/CC0805KRX7R9B104/50686.html	Capacitance:100nF Tolerance:±10% Tolerance:±10% Voltage Rating:50V Temperature Coefficient:X7R
	https://atta.szlcsc.com/upload/public/pdf/source/2018128/C33598723CA7AA50FB42690DF736C43FE112376.pdf	Capacitance: Tolerance:±20% Tolerance:±20% Rated Voltage: Ripple Current:200mA@120Hz Equivalent Series Resistance(ESR):- φ D: L: Lifetime @ Temp:2000hrs@105°C Operating Temperature:-40°C~+105°C Operating Temperature:-40°C~+105°C
	https://atta.szlcsc.com/upload/public/pdf/source/20210824/3DC9999D9B098FE241E3A26137981C4C.pdf	Capacitance: Tolerance:±20% Tolerance:±20% Rated Voltage: Ripple Current:110mA@120Hz Equivalent Series Resistance(ESR):- φ D: L: Lifetime @ Temp:2000hrs@105°C Operating Temperature:-55°C~+105°C Operating Temperature:-55°C~+105°C
		Pitch:2.54mm Row Spacing:- Circular Hole / Square Hole:Square Hole Mounting Type:Through Hole Number of Rows:1 Number of Positions:3P Holes Direction:Top Insulation Height:- Contact Material:- Contact Plating:Gold
	https://atta.szlcsc.com/upload/public/pdf/source/20221031/612FD86AB56BC97348D50ABB624A77A8.pdf	Holes Structure:1x20P Pitch:2.54mm Row Spacing:2.54mm Circular Hole / Square Hole:方孔 Mounting Type:Straight Number of Rows:Plugin Number of Holes:20P Current Rating (Max):2.5A Holes Direction:Top Insulation Height:8.5mm Operating Temperature Range:-40°C~+1

	https://atta.szlcsc.com/upload/public/pdf/source/20200309/C492401_A812433581A9B211A7FFA413ADDF0E5.pdf	Pin Structure:1x2P Pitch:2.54mm Row Spacing:- Circular Pins/Square Pins:Square Pins Mounting Type:Straight Number of Rows:Plugin Number of Pins:2P Current Rating (Max):- Voltage Rating (Max):- Length of Mating Pin:6mm Insulation Height:2.5mm Length of End
	https://atta.szlcsc.com/upload/public/pdf/source/20210301/C2718488_F4427B881E42CAA8DB0B1C12B3A522C.pdf	Holes Structure:1x4P Pitch:2.54mm Row Spacing:- Circular Hole / Square Hole:Square Holes Mounting Type:Straight Number of Rows:Plugin Number of Holes:4P Current Rating (Max):3A Voltage Rating (Max):- Holes Direction:Top Insulation Height:- Contact Materia
	https://item.szlcsc.com/datasheet/SS8050(RANGE%253A200-350)/2507.html	type:NPN Current - Collector(Ic):1.5A Collector - Emitter Voltage VCEO:25V Pd - Power Dissipation:300mW DC Current Gain:200 DC Current Gain:200 Transition frequency(fT):100MHz Current - Collector Cutoff:100nA Vce Saturation(VCE(sat)):500mV Operating Tempe
	https://item.szlcsc.com/datasheet/0402WGF1002TCE/26487.html	Type:Thick Film Resistor Resistance:10kΩ Tolerance:±1% Tolerance:±1% Power(Watts):62.5mW Voltage-Supply(Max):50V Temperature Coefficient:±100ppm/°C Temperature Coefficient:±100ppm/°C Operating Temperature:-55°C~+155°C Operating Temperature:-55°C~+155°C
	https://item.szlcsc.com/datasheet/0805W8F2002T5E/4735.html	Type:Thick Film Resistor Resistance:20kΩ Tolerance:±1% Tolerance:±1% Power(Watts):125mW Voltage-Supply(Max):150V Temperature Coefficient:±100ppm/°C Temperature Coefficient:±100ppm/°C Operating Temperature:-55°C~+155°C Operating Temperature:-55°C~+155°C
	https://item.szlcsc.com/datasheet/SK6812MINI-HS/3234155.html	Dominant Wavelength - R:620nm~625nm Dominant Wavelength - R:620nm~625nm Dominant Wavelength - G:520nm~530nm Dominant Wavelength - G:520nm~530nm Dominant Wavelength - B:465nm~475nm Dominant Wavelength - B:465nm~475nm Data Transmission Rate:800Kbit/s Voltag

