



USE ABS CEMENT TO GLUE
PAD RING TO BAFFLE. CAREFULLY
LINE UP SCREW HOLES. HOLD TO
HALVES TOGETHER WHILE GLUING
TO ENSURE PARTS ARE FLUSH.

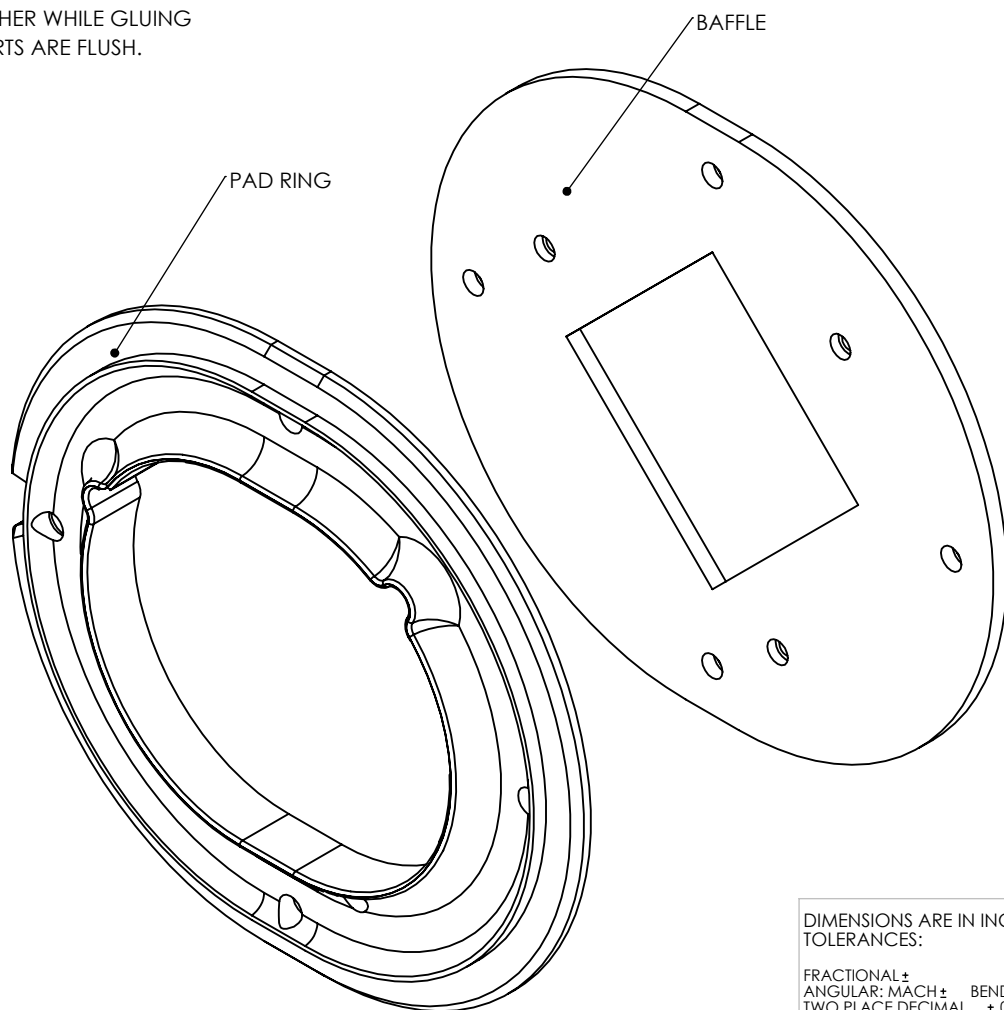

PARTS SHOULD
LOOK LIKE THIS
ONCE GLUED


BAFFLE ASSEMBLY REAR VIEW

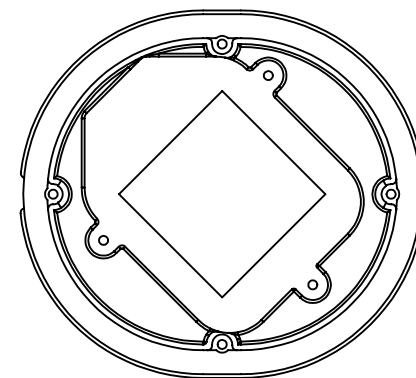

BAFFLE ASSEMBLY SIDE VIEW



BAFFLE ASSEMBLY FRONT VIEW

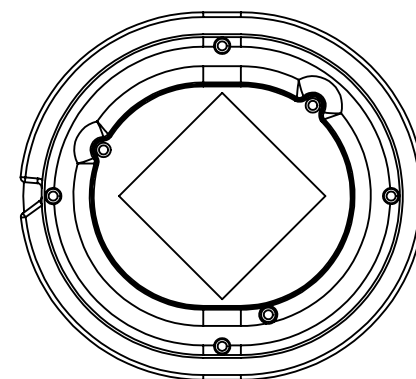

DIMENSIONS ARE IN INCHES
TOLERANCES:

FRACTIONAL \pm
ANGULAR: MACH \pm BEND \pm
TWO PLACE DECIMAL \pm .01
THREE PLACE DECIMAL \pm .005

MATERIAL:

FINISH:

NAME	DATE
DRAWN	
CHECKED	
ENG APPR.	

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN
THIS DRAWING IS THE SOLE
PROPERTY OF MrSpeakers. ANY
REPRODUCTION IN PART OR AS A
WHOLE WITHOUT THE WRITTEN
PERMISSION OF MrSpeakers IS
PROHIBITED.

MrSpeakers

ASSEMBLY NAME :

OPEN ALPHA,
BAFFLE ASSEMBLY

PROJECT:

SIZE PART NUMBER:
A

REV.

DO NOT SCALE DRAWING

SHEET 1 OF 1