




Fixed training-label noise: four levels

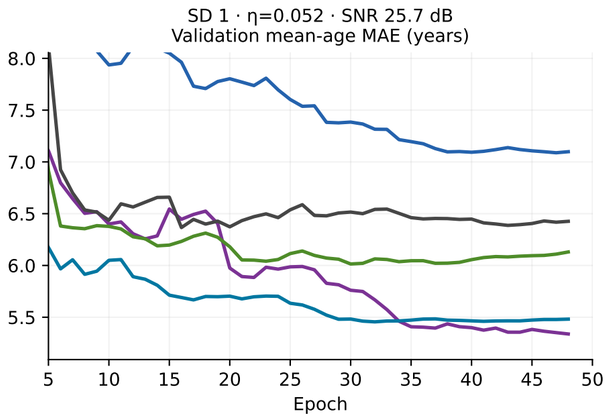


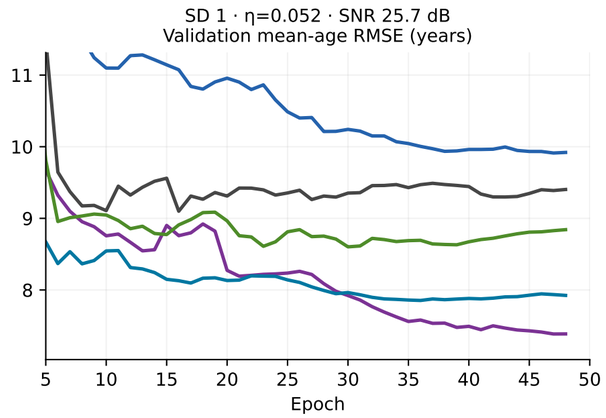


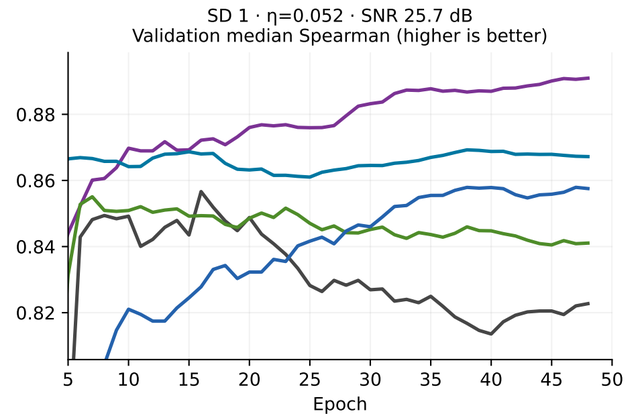


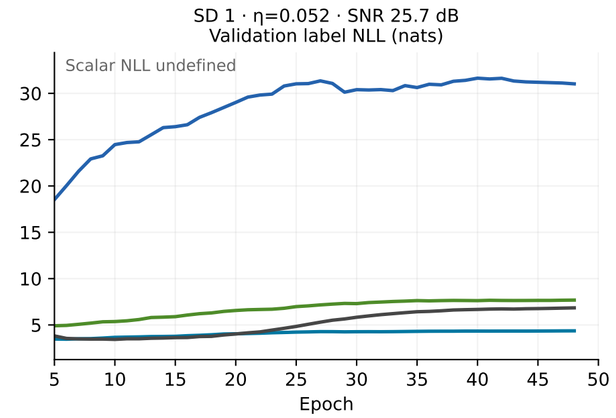


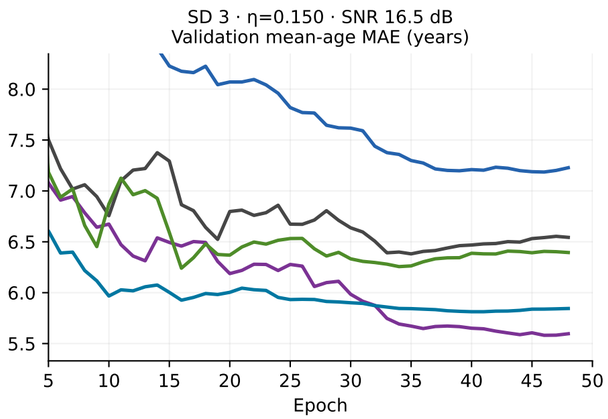


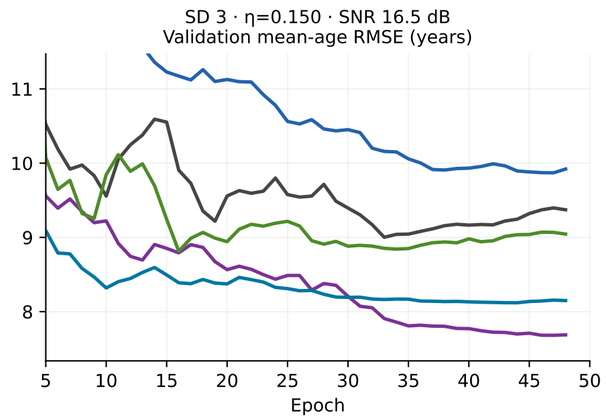


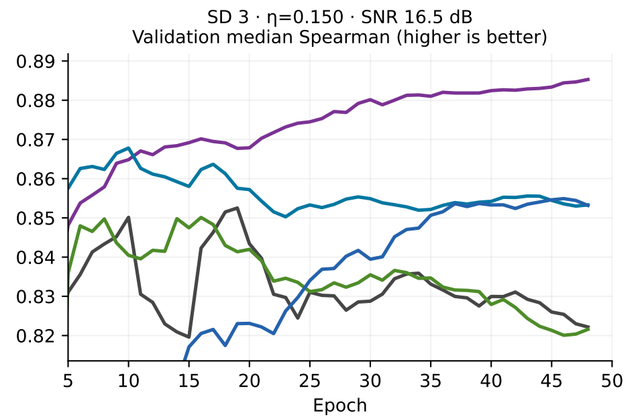


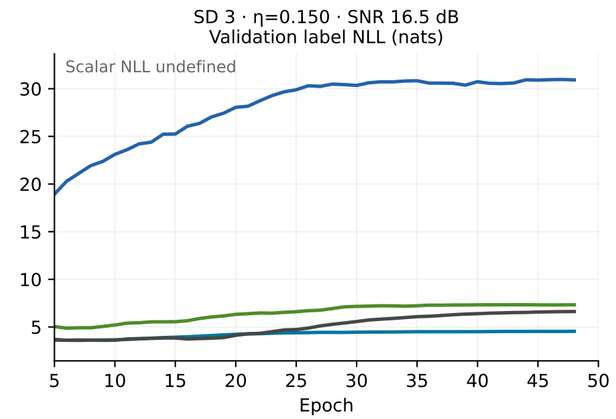


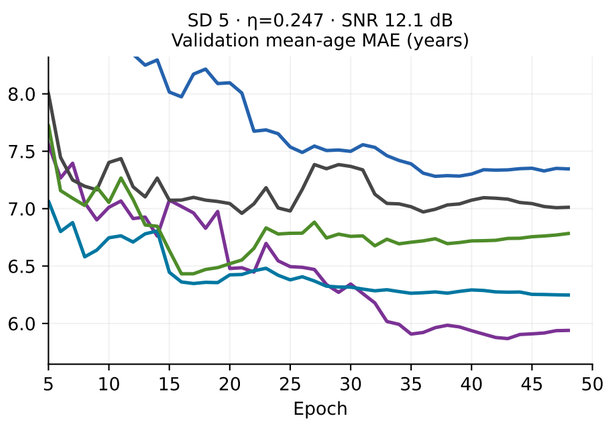


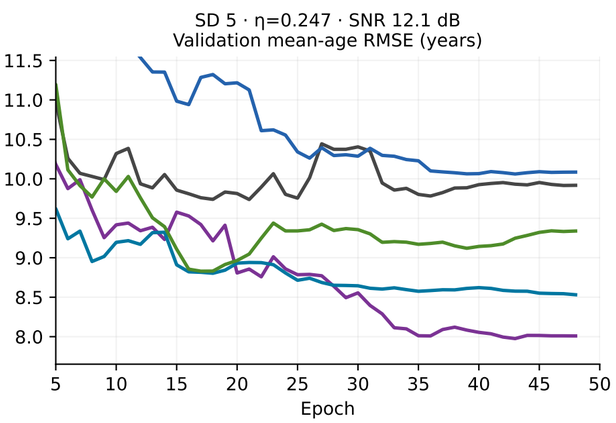


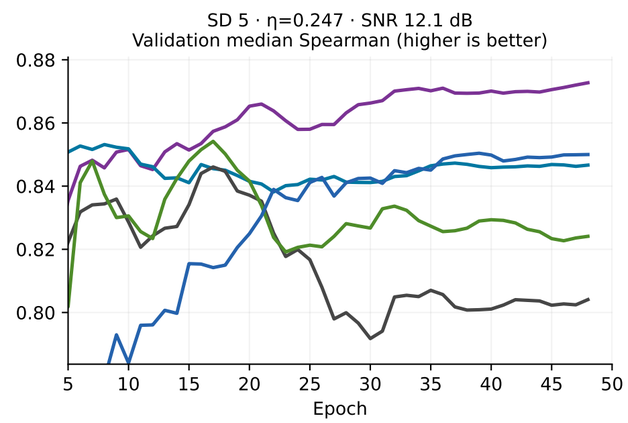


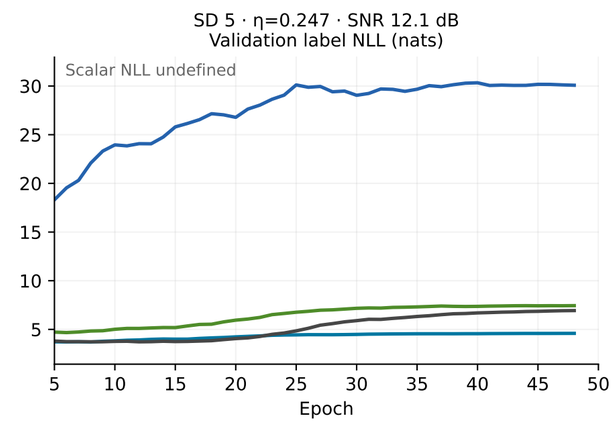

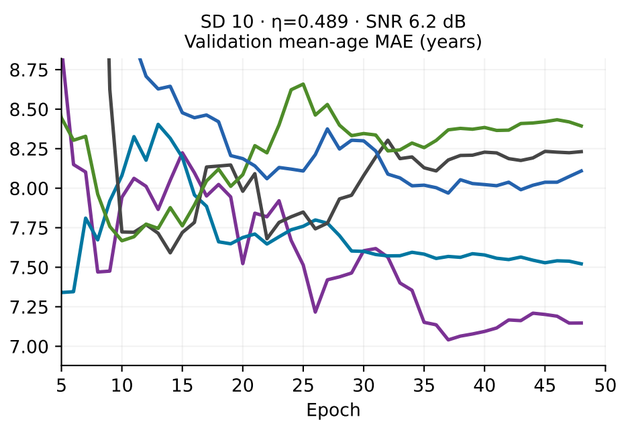

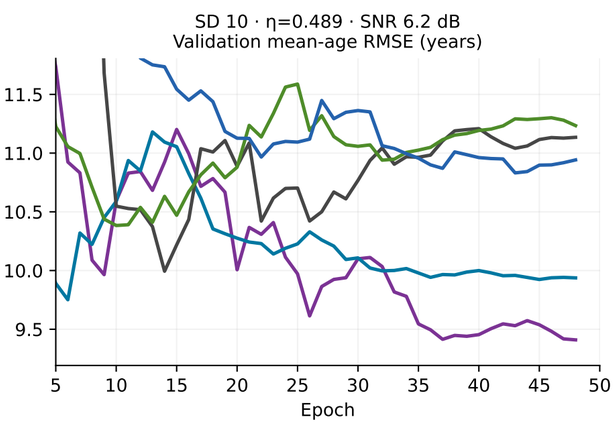

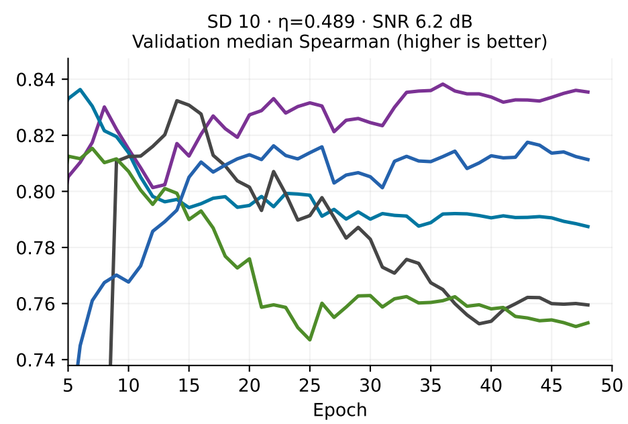

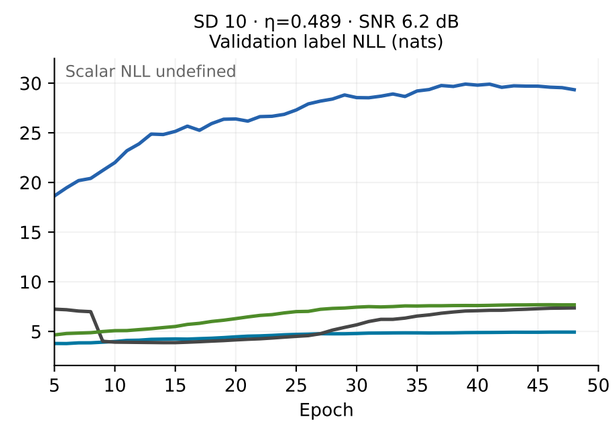

4096 images × 50 epochs; optimization seed 42, noise seed 2026; held-out labels are clean. η = noise RMS / clean-age SD (about 0.05 at SD 1); conventional power SNR = 1/η². SD 3 replaces the unrun SD 2 by request. GRPO MAE is the best available clean-validation RL configuration; RLOO noise arms were not run. Moving means: 5 epochs (10 for 200-epoch runs); bands: between-seed sample SD where n=3. Axes emphasize later fit; the interactive viewer can show full training trajectories.