


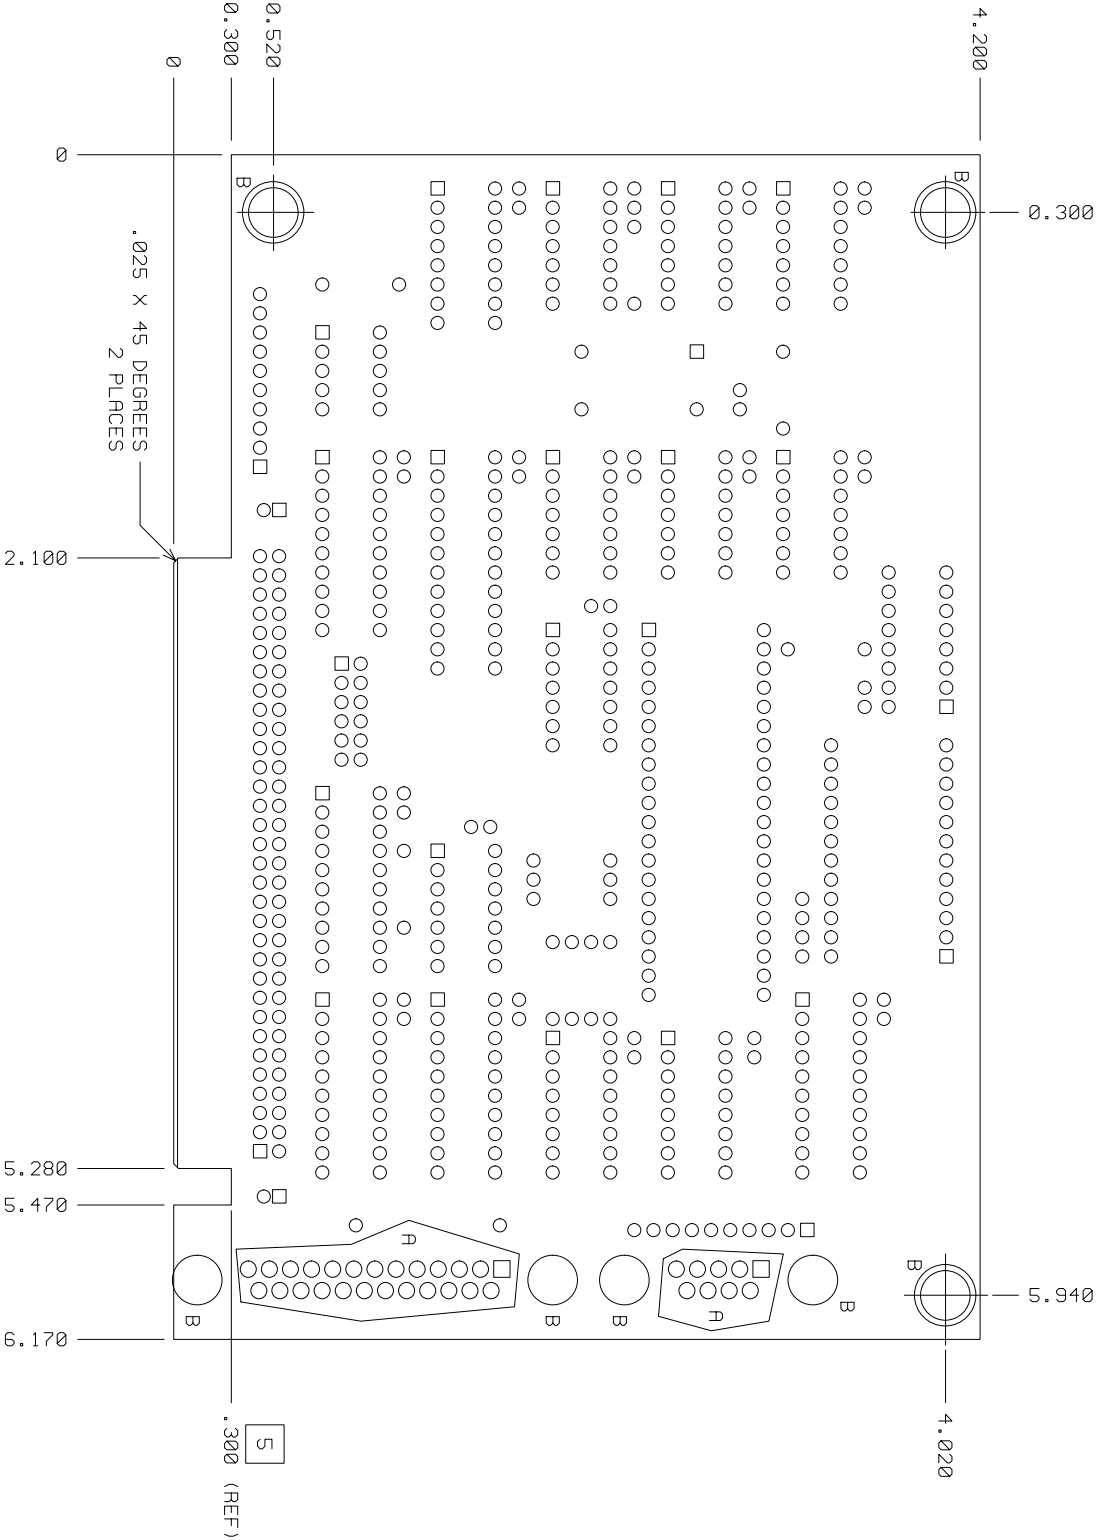

NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIAL: .062 NOMINL FINISHED THICKNESS GREEN NEMA GRADE FR-4 GLASS EPOXY LAMINATE, 1 OUNCE COPPER CLAD 4 LAYERS.
2. FINISH: ALL THROUGH HOLES AND CONDUCTIVE PATTERNS SHALL BE COPPER PLATED .0010 - .0016 THICK. TIN/LEAD PLATE ALL EXPOSED COPPER .0003 - .0008 THICK. REFLOW IS OPTIONL.
3. ALL HOLE SIZES SHOWN ARE FINISHED DIMETERS.
4. SOLDERMASK BOTH SIDES OF BOARD USING GREEN PC-401 OR EQUIVALENT.
5. GOLD PLATE FINGERS .000030 - .000050 THICK TO DIMENSION SHOWN OVER .0002 - .0005 THICK NICKEL ALLOY BARRIER.
6. CHAMFER FINGERS .020 X 45 DEGREES BOTH SIDES (TOP AND BOTTOM).
7. SILKSCREEN COMPONENT SIDE (LAYER 1) USING WHITE NON-CONDUCTIVE EPOXY INK.
8. FINISHED BOARD MUST MEET OR EXCEED U.L. 94V0 CLASSIFICATION. VENDOR LOGO, TYPE DESIGNATION, AND U.L. APPROVAL MUST BE CLEARLY ETCHED IN A CONVENIENT LOCATION ON THE SOLDER SIDE OF THE BOARD.

NIMRA
SENDER,PCB
030-0102-01 REV A
28 DECEMBER 1999
FABRICATION

HOLE CHART		
CODE	FINISHED DIA.	QTY
*	.025 +/- .003	75
NONE	.040 +/- .003	546
A	.055 +/- .003	34
B	.125 +/- .004	7

*: DENOTES .050 PADS NOT SHOWN