


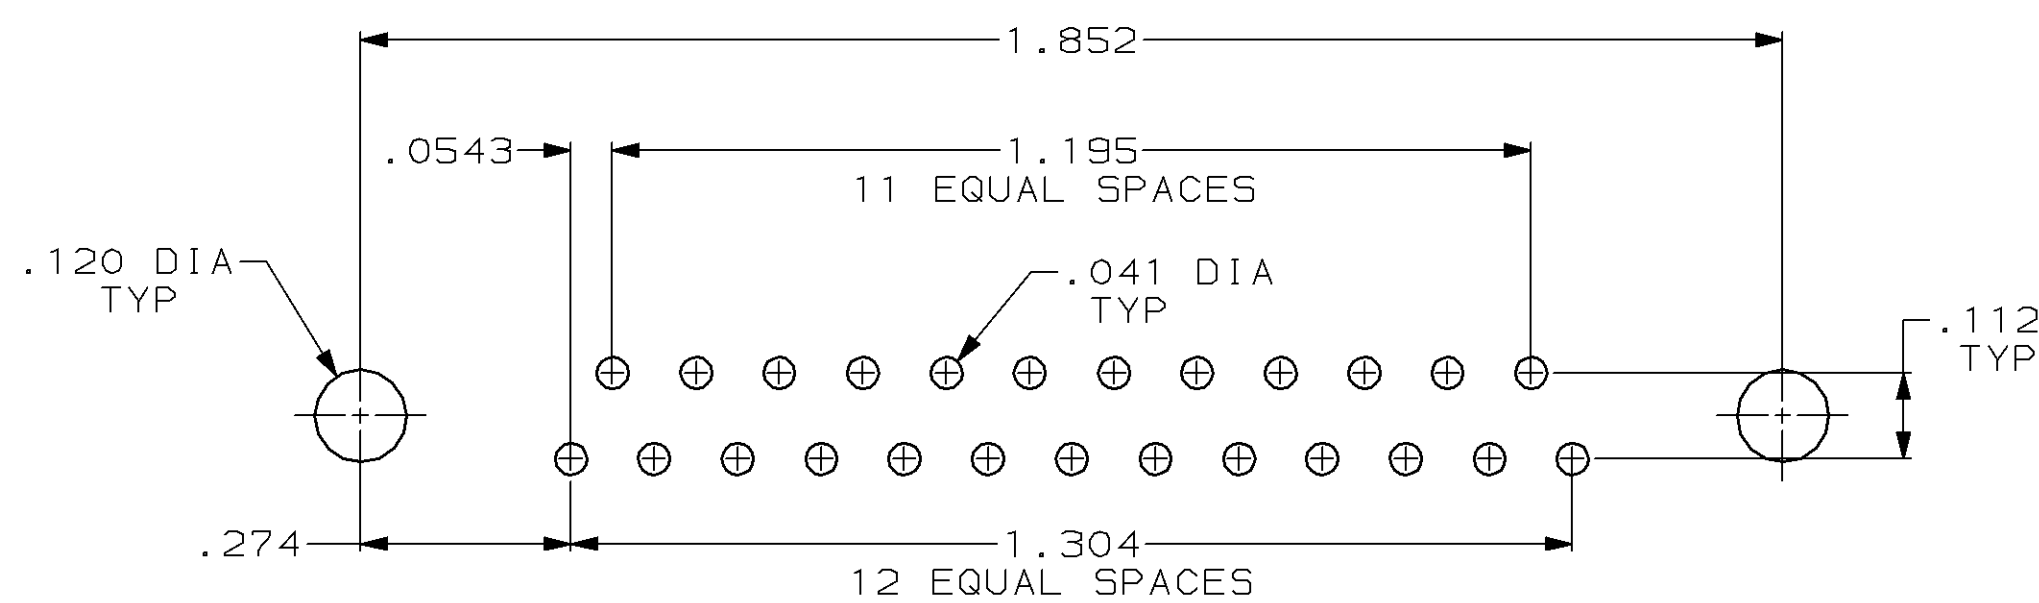

Top view of a circular mechanical part. It features a central circular hole surrounded by a thick ring. This ring has six radial slots or spokes extending outwards. The outer edge of the part is irregular and non-circular. A horizontal centerline is drawn through the center of the part.

YP BOTH ENDS

-
- LOCK
- Technical drawing of a mechanical part, likely a lock component, showing dimensions and tolerances. The drawing is a cross-sectional view of a complex, multi-tiered part. Key dimensions and tolerances are indicated:
- Top horizontal dimension: $.125 \pm .015$ TYP
 - Second horizontal dimension from the left: $.247 \pm .010$ TYP
 - Left vertical dimension (top section): $.243$
 - Left vertical dimension (middle section): $.318 \pm .015$ TYP
 - Right vertical dimension (total height): $.740 \pm .015$ TYP
 - Bottom left vertical dimension: $.112 \pm .010$ TYP

SUPSD BY 745783-2

DO NOT SCALE PRINT.
UNLESS SPECIFIED
DIMENSIONS IN INCHES
TOLERANCES ON :

2 PLC DEC	±	-
3 PLC DEC	±	.005
ANGLES	±	2°

DR 1-23-91 J GALLUCCI BG
CHK 4-26-91 R. STONE
APPD 4-26-91 J.W. YOUNG

AMP AMP Incorporated
Harrisburg, PA 17105-3608

RCPT ASSY, SIZE 3, 25 POSN, RTANG,
AMPLIMITE™ HD-20, WITH METAL SHELL,
WITH OR WITHOUT SCREWLOCKS OR INSERTS

FINISH 	APPLICATION SPEC	SIZE	CAGE CODE	DRAWING NO	
	114-40010	D	00779	745783	
	WEIGHT	SCALE			SHEET
	-	4:1			1 OF 1