

USB Computer Interface
(Sheet 2)

Parallel Port
(Sheet 3)

DCC Signal Generator
(Sheet 5)



Clocks & Timing
(Sheet 4)

Output Interface
(Sheet 6)

Notes:
1. All resistors and capacitors are 0805, unless otherwise specified.



OFFSET	DESCRIPTION
0x00	Generic <Balanced> Inputs
0x04	Generic Inputs <Functions>
0x08	Generic Outputs
0x0C	<Not Decoded>
0x10	8255 Port A <Byte to Send>
0x11	8255 Port B <Self-Test Signals>
0x12	8255 Port C <Ctrl Signals>
0x13	8255 Control Register
0x14	8254 Counter 0 <DCC 0 Time>
0x15	8254 Counter 1 <DCC 0 High>
0x16	8254 Counter 2 <DCC 1 Time>
0x17	8254 Control Register
0x18	<Not Decoded>
0x1C	<Not Decoded>

BJ Barnt North Ridgeville, Ohio e-mail: brian@bjbarnt.us			
Send3DCC Decoder Test Board			
TITLE	SIZE	DWG NO.	REV
	B	ES-0031	A
SCALE	NONE		SHEET 1/7

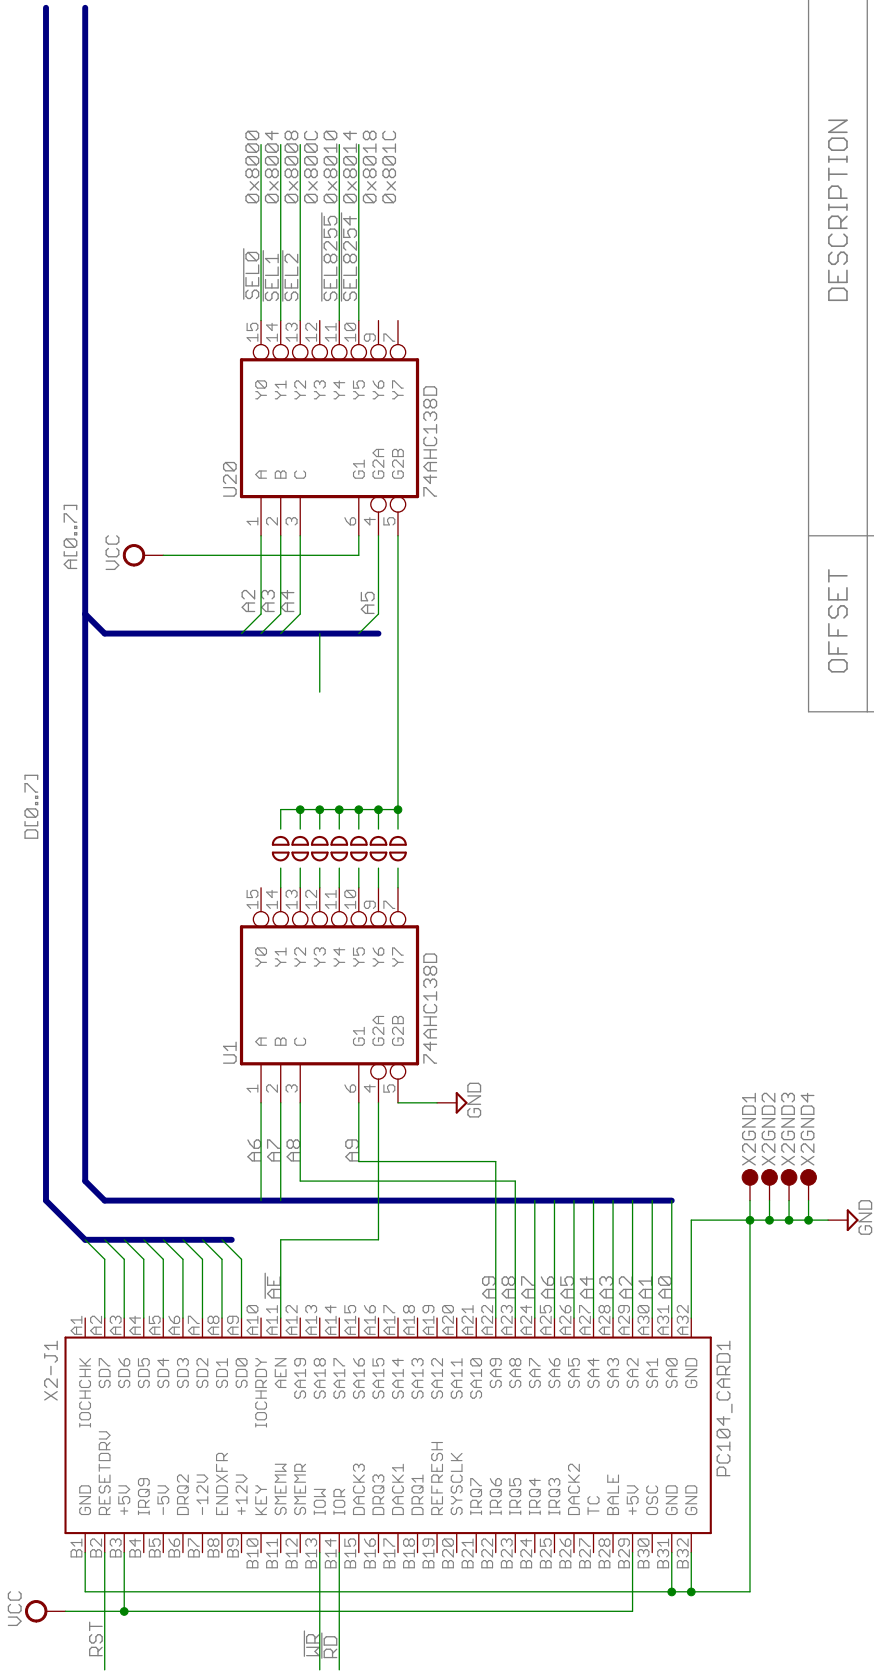





OFFSET	DESCRIPTION
0x00	Generic <Balanced> Inputs
0x04	Generic Inputs <Functions>
0x08	Generic Outputs
0x0C	<Not Decoded>
0x10	8255 Port A <Byte to Send>
0x11	8255 Port B <Self-Test Signals>
0x12	8255 Port C <Ctrl Signals>
0x13	8255 Control Register
0x14	8254 Counter 0 <DCC 0 Time>
0x15	8254 Counter 1 <DCC 0 High>
0x16	8254 Counter 2 <DCC 1 Time>
0x17	8254 Control Register
0x18	<Not Decoded>
0x1C	<Not Decoded>

BJ Barnt North Ridgeville, Ohio e-mail: brian@bjbarnt.us		
TITLESend3 USB Interface & CPU		
SIZE B	DWG NO. ES-0031	REV A
SCALE NONE		SHEET 2/7

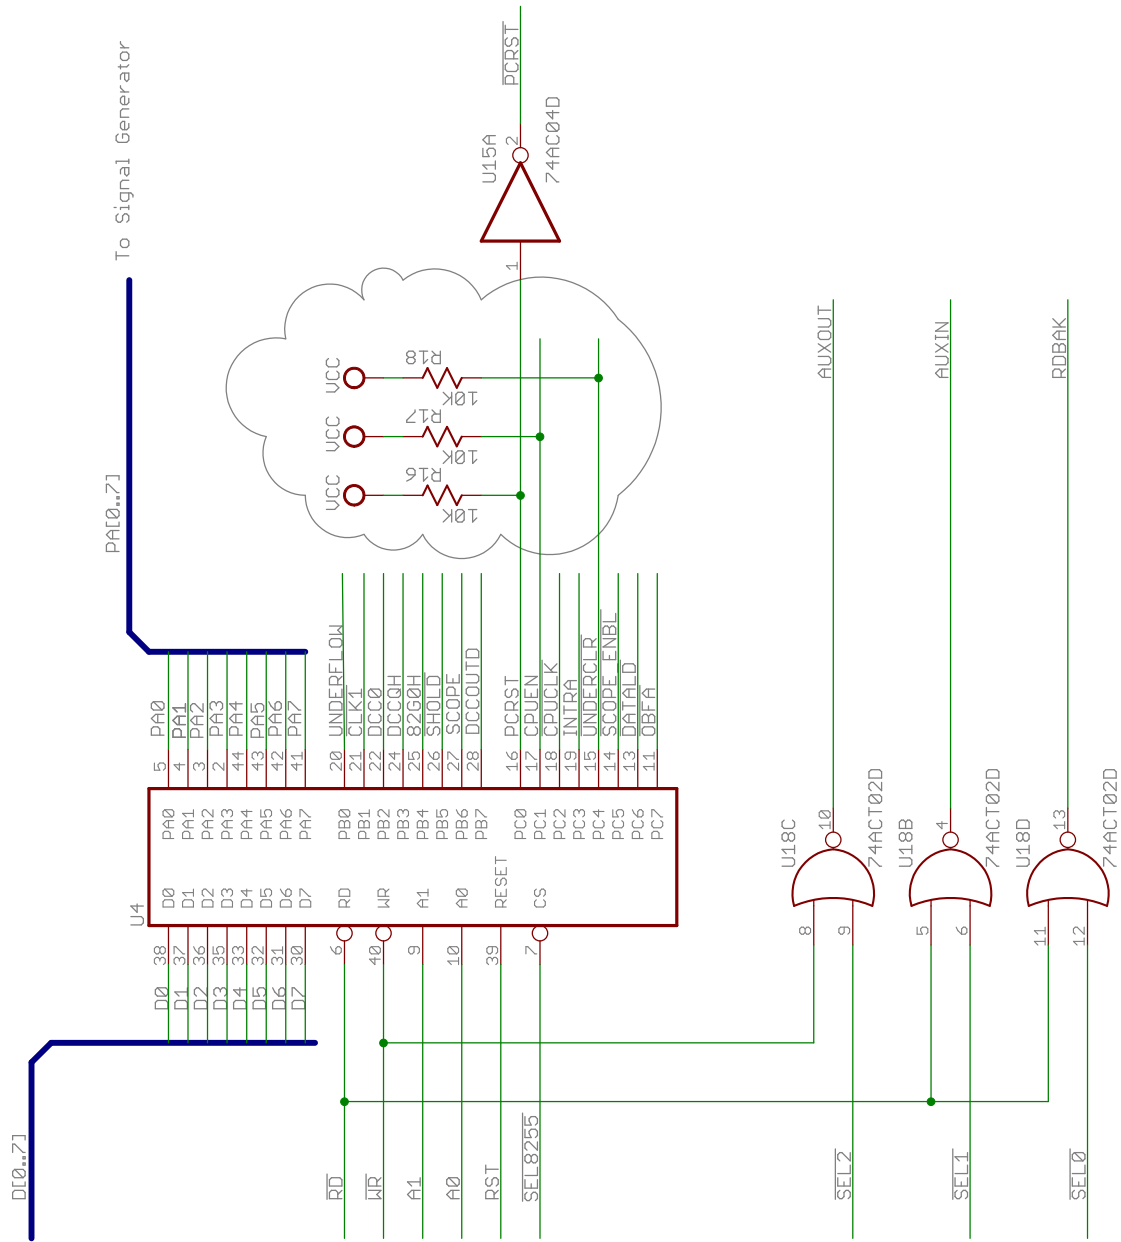


D10..7]

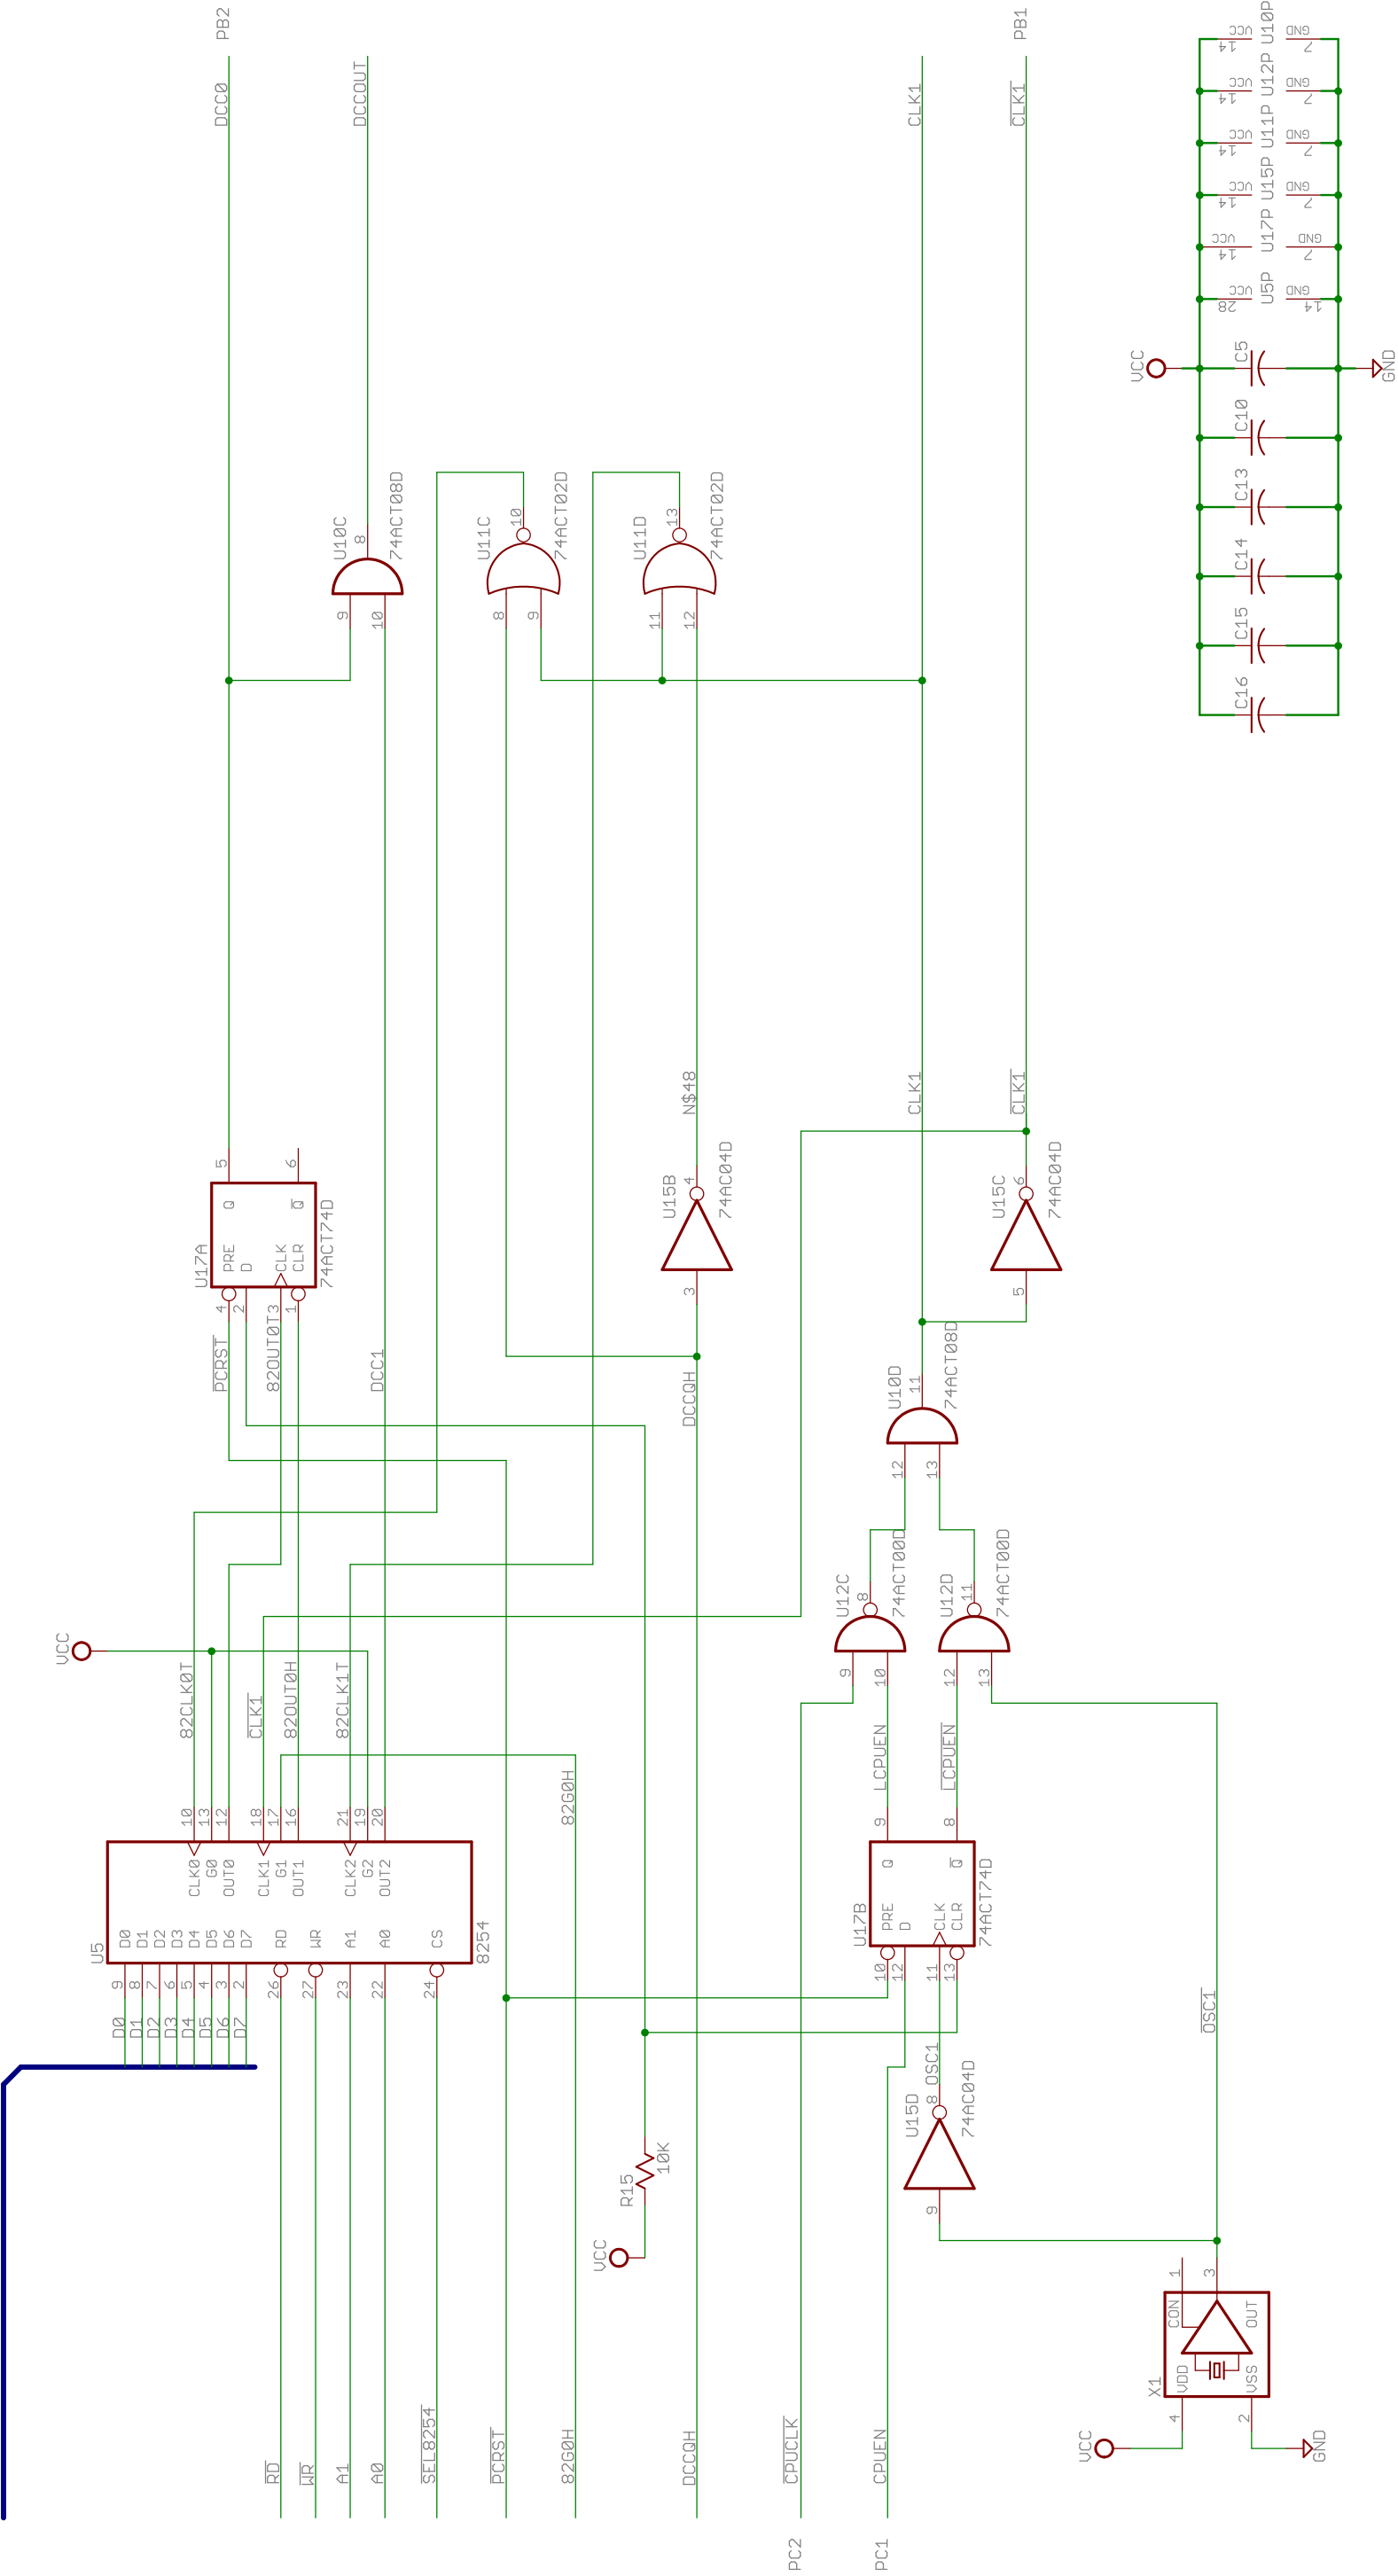

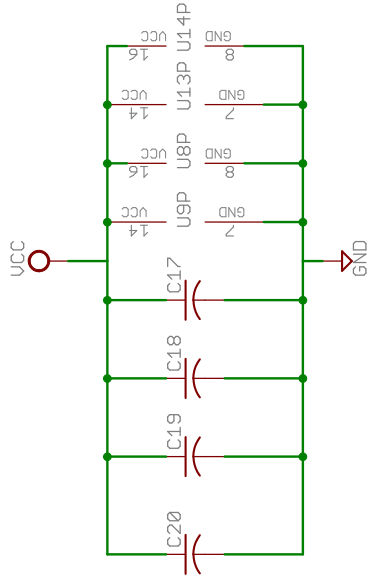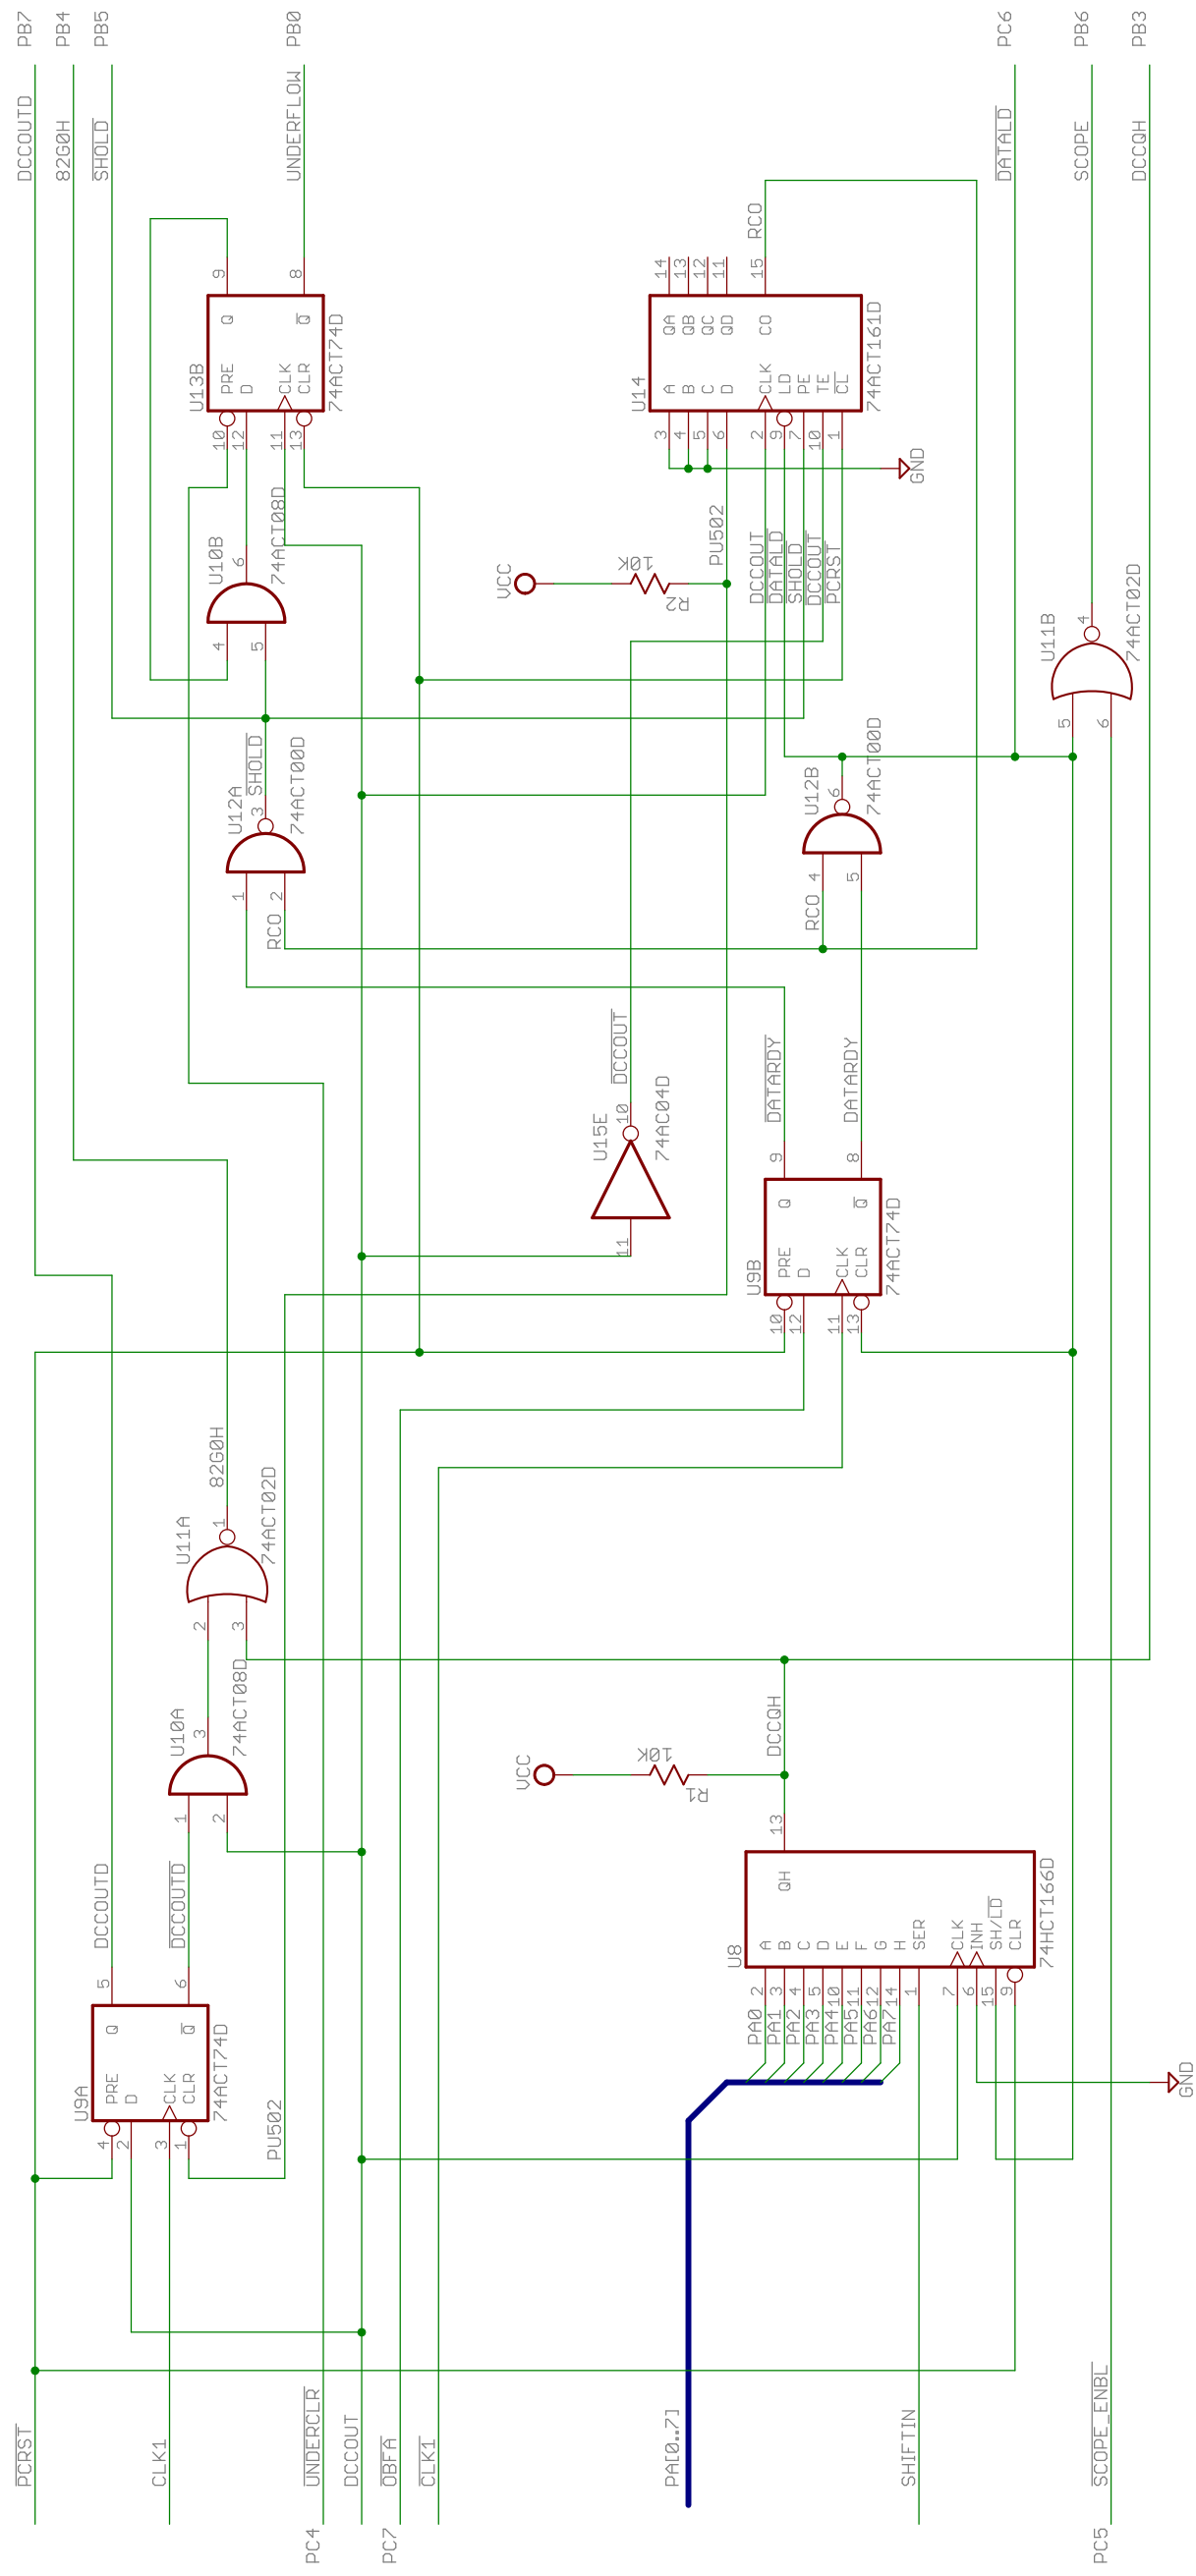

The 26-pin header uses non-standard connections so a ribbon cable can be connected.

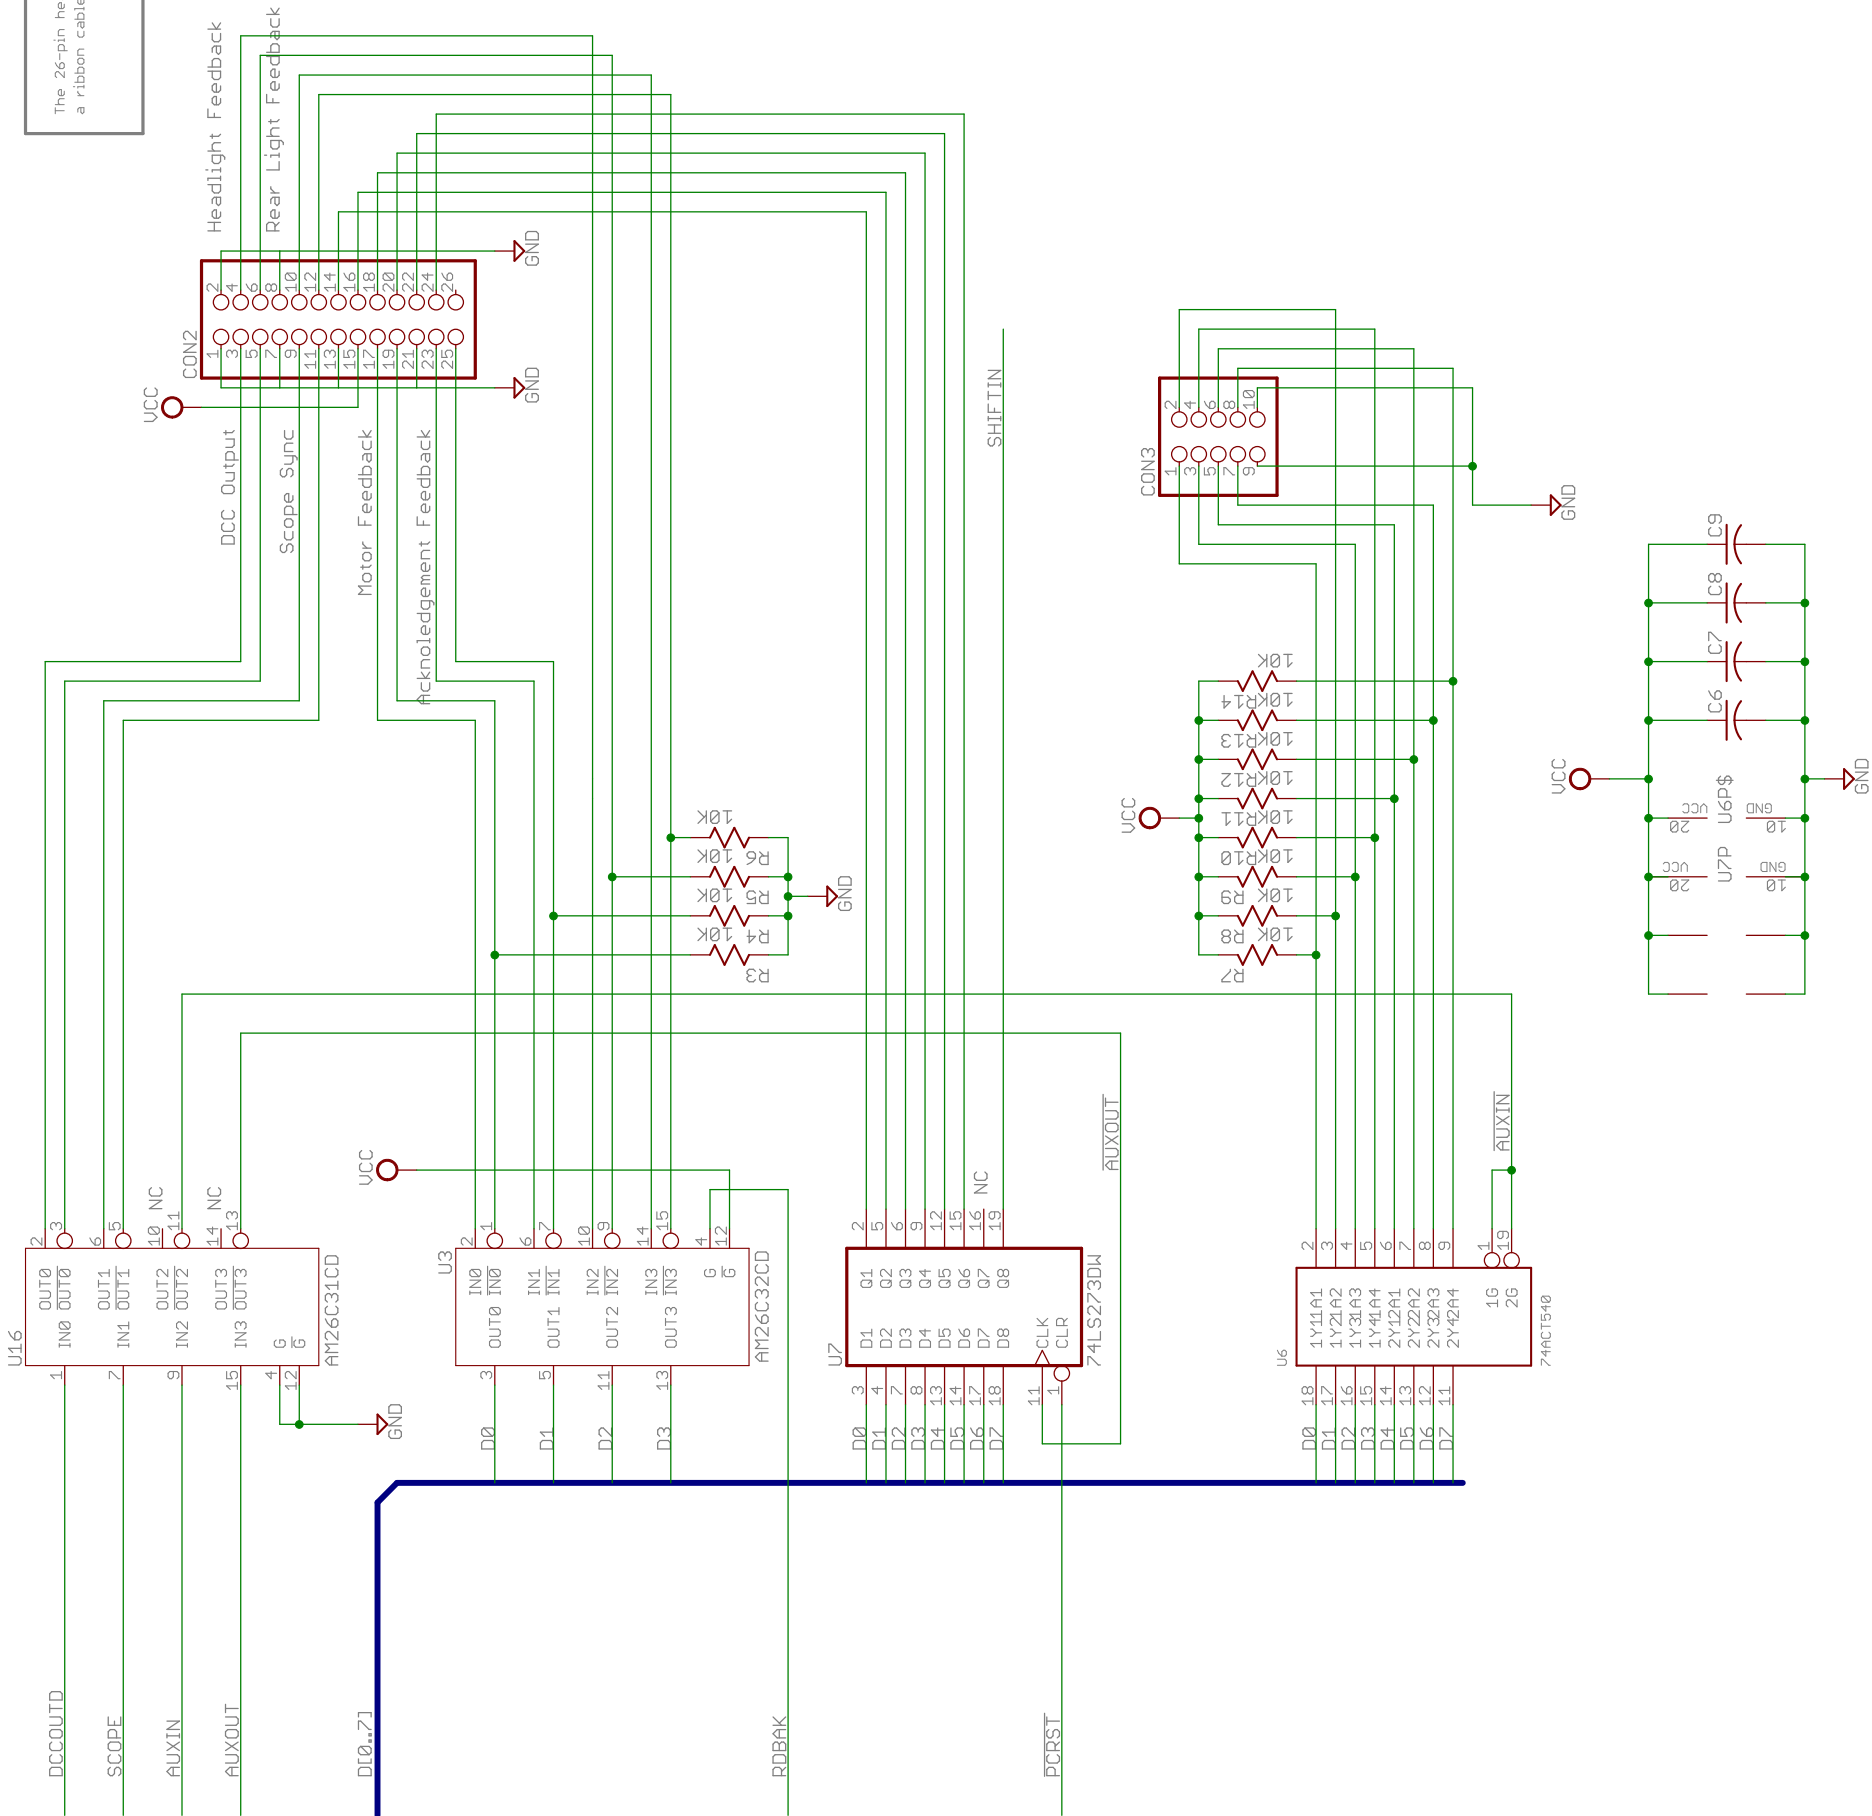

BJ Barnt North Ridgeville, Ohio e-mail: brian@bjbarnt.us		
TITLESend3 Output Drivers		
SIZE B	DWG NO. ES-0031	REV A
SCALE NONE	SHEET 6/7	