Assignment 3

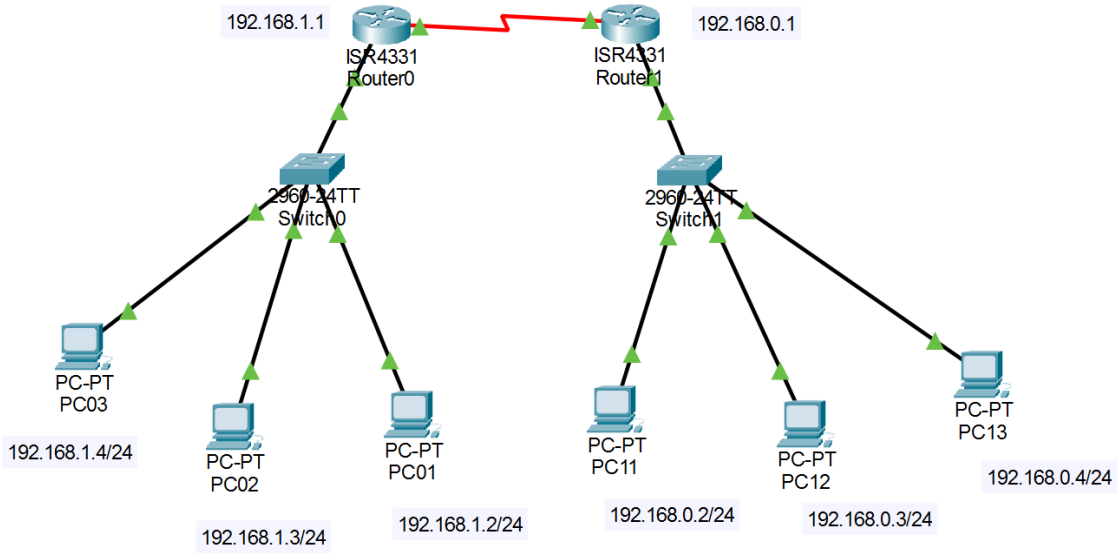

File :
https://drive.google.com/file/d/10vd3kkYSCX8rPhAYPSPkz6AYPoHuX7xJ/view?usp=drive_link

673380513-5 นาเดีย คิดอ่าน sec.2

เช็ค Interface Router0

```
Router#show ip interface brief
Interface              IP-Address      OK? Method Status                Protocol
GigabitEthernet0/0/0   192.168.1.1     YES manual up                    up
GigabitEthernet0/0/1   unassigned      YES unset  administratively down down
GigabitEthernet0/0/2   unassigned      YES unset  administratively down down
Serial0/1/0            10.0.0.2        YES manual up                    up
Serial0/1/1            unassigned      YES unset  administratively down down
Vlan1                  unassigned      YES unset  administratively down down
Router#
```

เช็ค Interface Router1

```
Router(config)#exit
Router#
%SYS-5-CONFIG_I: Configured from console by console
show ip interface brief
Interface              IP-Address      OK? Method Status                Protocol
GigabitEthernet0/0/0   192.168.0.1     YES manual up                    up
GigabitEthernet0/0/1   unassigned      YES unset  administratively down down
GigabitEthernet0/0/2   unassigned      YES unset  administratively down down
Serial0/1/0            10.0.0.1        YES manual up                    up
Serial0/1/1            unassigned      YES unset  administratively down down
Vlan1                  unassigned      YES unset  administratively down down
Router#
```

เช็ค Static Route 0

```
Router#ping 192.168.0.1

Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 192.168.0.1, timeout is 2 seconds:
!!!!!
Success rate is 100 percent (5/5), round-trip min/avg/max = 1/6/19 ms

Router#
```

เช็ค Static Route 1

```
Router#ping 192.168.1.1

Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 192.168.1.1, timeout is 2 seconds:
!!!!!
Success rate is 100 percent (5/5), round-trip min/avg/max = 1/2/6 ms

Router#
```

Ping PC01 -> PC11,PC12,PC13

```
C:\>ping 192.168.0.2

Pinging 192.168.0.2 with 32 bytes of data:

Reply from 192.168.0.2: bytes=32 time=12ms TTL=126
Reply from 192.168.0.2: bytes=32 time=1ms TTL=126
Reply from 192.168.0.2: bytes=32 time=2ms TTL=126
Reply from 192.168.0.2: bytes=32 time=10ms TTL=126

Ping statistics for 192.168.0.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 1ms, Maximum = 12ms, Average = 6ms

C:\>ping 192.168.0.3

Pinging 192.168.0.3 with 32 bytes of data:

Request timed out.
Reply from 192.168.0.3: bytes=32 time=1ms TTL=126
Reply from 192.168.0.3: bytes=32 time=1ms TTL=126
Reply from 192.168.0.3: bytes=32 time=8ms TTL=126

Ping statistics for 192.168.0.3:
    Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
Approximate round trip times in milli-seconds:
    Minimum = 1ms, Maximum = 8ms, Average = 3ms

C:\>ping 192.168.0.4

Pinging 192.168.0.4 with 32 bytes of data:

Request timed out.
Reply from 192.168.0.4: bytes=32 time=8ms TTL=126
Reply from 192.168.0.4: bytes=32 time=9ms TTL=126
Reply from 192.168.0.4: bytes=32 time=11ms TTL=126

Ping statistics for 192.168.0.4:
    Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
Approximate round trip times in milli-seconds:
    Minimum = 8ms, Maximum = 11ms, Average = 9ms

C:\>
```

Ping PC02 -> PC11,PC12,PC13

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.0.2

Pinging 192.168.0.2 with 32 bytes of data:

Reply from 192.168.0.2: bytes=32 time=1ms TTL=126
Reply from 192.168.0.2: bytes=32 time=1ms TTL=126
Reply from 192.168.0.2: bytes=32 time=1ms TTL=126
Reply from 192.168.0.2: bytes=32 time=1ms TTL=126

Ping statistics for 192.168.0.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 1ms, Maximum = 1ms, Average = 1ms

C:\>ping 192.168.0.3

Pinging 192.168.0.3 with 32 bytes of data:

Reply from 192.168.0.3: bytes=32 time=13ms TTL=126
Reply from 192.168.0.3: bytes=32 time=10ms TTL=126
Reply from 192.168.0.3: bytes=32 time=8ms TTL=126
Reply from 192.168.0.3: bytes=32 time=1ms TTL=126

Ping statistics for 192.168.0.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 1ms, Maximum = 13ms, Average = 8ms

C:\>ping 192.168.0.4

Pinging 192.168.0.4 with 32 bytes of data:

Reply from 192.168.0.4: bytes=32 time=11ms TTL=126
Reply from 192.168.0.4: bytes=32 time=1ms TTL=126
Reply from 192.168.0.4: bytes=32 time=11ms TTL=126
Reply from 192.168.0.4: bytes=32 time=6ms TTL=126

Ping statistics for 192.168.0.4:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 1ms, Maximum = 11ms, Average = 7ms

C:\>
```

Ping PC03 -> PC11,PC12,PC13

```
Cisco Packet Tracer PC Command Line 1.0
C:\>Ping 192.168.0.2

Pinging 192.168.0.2 with 32 bytes of data:

Reply from 192.168.0.2: bytes=32 time=1ms TTL=126
Reply from 192.168.0.2: bytes=32 time=6ms TTL=126
Reply from 192.168.0.2: bytes=32 time=1ms TTL=126
Reply from 192.168.0.2: bytes=32 time=1ms TTL=126

Ping statistics for 192.168.0.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 1ms, Maximum = 6ms, Average = 2ms

C:\>Ping 192.168.0.3

Pinging 192.168.0.3 with 32 bytes of data:

Reply from 192.168.0.3: bytes=32 time=10ms TTL=126
Reply from 192.168.0.3: bytes=32 time=11ms TTL=126
Reply from 192.168.0.3: bytes=32 time=1ms TTL=126
Reply from 192.168.0.3: bytes=32 time=1ms TTL=126

Ping statistics for 192.168.0.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 1ms, Maximum = 11ms, Average = 5ms

C:\>Ping 192.168.0.4

Pinging 192.168.0.4 with 32 bytes of data:

Reply from 192.168.0.4: bytes=32 time=10ms TTL=126
Reply from 192.168.0.4: bytes=32 time=8ms TTL=126
Reply from 192.168.0.4: bytes=32 time=7ms TTL=126
Reply from 192.168.0.4: bytes=32 time=1ms TTL=126

Ping statistics for 192.168.0.4:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 1ms, Maximum = 10ms, Average = 6ms

C:\>
```

Ping PC11 -> PC01,PC02,PC03

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.2

Pinging 192.168.1.2 with 32 bytes of data:

Reply from 192.168.1.2: bytes=32 time=2ms TTL=126
Reply from 192.168.1.2: bytes=32 time=5ms TTL=126
Reply from 192.168.1.2: bytes=32 time=1ms TTL=126
Reply from 192.168.1.2: bytes=32 time=1ms TTL=126

Ping statistics for 192.168.1.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 1ms, Maximum = 5ms, Average = 2ms

C:\>ping 192.168.1.3

Pinging 192.168.1.3 with 32 bytes of data:

Reply from 192.168.1.3: bytes=32 time=15ms TTL=126
Reply from 192.168.1.3: bytes=32 time=1ms TTL=126
Reply from 192.168.1.3: bytes=32 time=5ms TTL=126
Reply from 192.168.1.3: bytes=32 time=2ms TTL=126

Ping statistics for 192.168.1.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 1ms, Maximum = 15ms, Average = 5ms

C:\>ping 192.168.1.4

Pinging 192.168.1.4 with 32 bytes of data:

Reply from 192.168.1.4: bytes=32 time=15ms TTL=126
Reply from 192.168.1.4: bytes=32 time=1ms TTL=126
Reply from 192.168.1.4: bytes=32 time=1ms TTL=126
Reply from 192.168.1.4: bytes=32 time=10ms TTL=126

Ping statistics for 192.168.1.4:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 1ms, Maximum = 15ms, Average = 6ms

C:\>
```

Ping PC12 -> PC01,PC02,PC03

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.2

Pinging 192.168.1.2 with 32 bytes of data:

Reply from 192.168.1.2: bytes=32 time=12ms TTL=126
Reply from 192.168.1.2: bytes=32 time=15ms TTL=126
Reply from 192.168.1.2: bytes=32 time=6ms TTL=126
Reply from 192.168.1.2: bytes=32 time=1ms TTL=126

Ping statistics for 192.168.1.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 1ms, Maximum = 15ms, Average = 8ms

C:\>ping 192.168.1.3

Pinging 192.168.1.3 with 32 bytes of data:

Reply from 192.168.1.3: bytes=32 time=11ms TTL=126
Reply from 192.168.1.3: bytes=32 time=1ms TTL=126
Reply from 192.168.1.3: bytes=32 time=2ms TTL=126
Reply from 192.168.1.3: bytes=32 time=1ms TTL=126

Ping statistics for 192.168.1.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 1ms, Maximum = 11ms, Average = 3ms

C:\>ping 192.168.1.4

Pinging 192.168.1.4 with 32 bytes of data:

Reply from 192.168.1.4: bytes=32 time=13ms TTL=126
Reply from 192.168.1.4: bytes=32 time=9ms TTL=126
Reply from 192.168.1.4: bytes=32 time=8ms TTL=126
Reply from 192.168.1.4: bytes=32 time=7ms TTL=126

Ping statistics for 192.168.1.4:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 7ms, Maximum = 13ms, Average = 9ms

C:\>
```

Ping PC13 -> PC01,PC02,PC03

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.2

Pinging 192.168.1.2 with 32 bytes of data:

Reply from 192.168.1.2: bytes=32 time=14ms TTL=126
Reply from 192.168.1.2: bytes=32 time=9ms TTL=126
Reply from 192.168.1.2: bytes=32 time=1ms TTL=126
Reply from 192.168.1.2: bytes=32 time=1ms TTL=126

Ping statistics for 192.168.1.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 1ms, Maximum = 14ms, Average = 6ms

C:\>ping 192.168.1.3

Pinging 192.168.1.3 with 32 bytes of data:

Reply from 192.168.1.3: bytes=32 time=14ms TTL=126
Reply from 192.168.1.3: bytes=32 time=19ms TTL=126
Reply from 192.168.1.3: bytes=32 time=1ms TTL=126
Reply from 192.168.1.3: bytes=32 time=9ms TTL=126

Ping statistics for 192.168.1.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 1ms, Maximum = 19ms, Average = 10ms

C:\>ping 192.168.1.4

Pinging 192.168.1.4 with 32 bytes of data:

Reply from 192.168.1.4: bytes=32 time=11ms TTL=126
Reply from 192.168.1.4: bytes=32 time=1ms TTL=126
Reply from 192.168.1.4: bytes=32 time=10ms TTL=126
Reply from 192.168.1.4: bytes=32 time=11ms TTL=126

Ping statistics for 192.168.1.4:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 1ms, Maximum = 11ms, Average = 8ms

C:\>
```