




Connector for charge board and input voltage (battery)

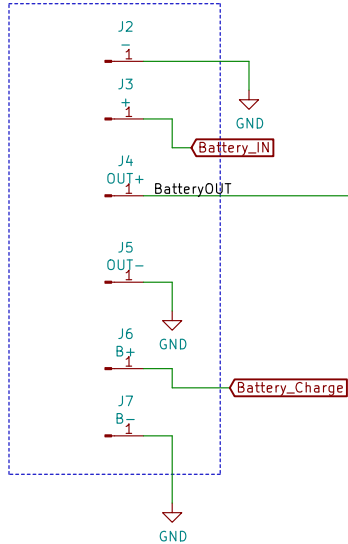



3.7V to 3.3V conversion for Gyro and Accelerometer daughterboard

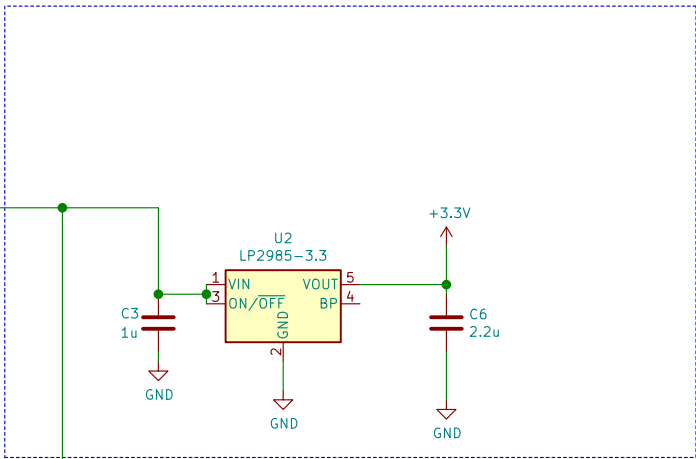

3.7V to 5V conversion for the ATmega328P-PU microcontroller

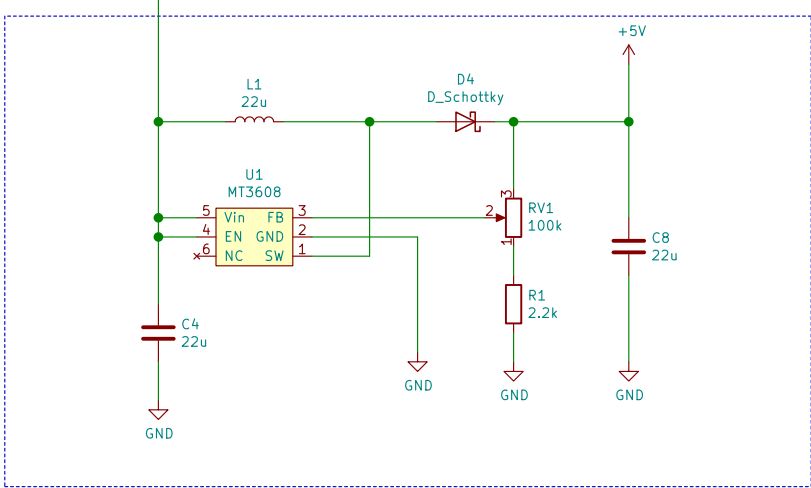

Header for Gyro and Accelerometer daughterboard

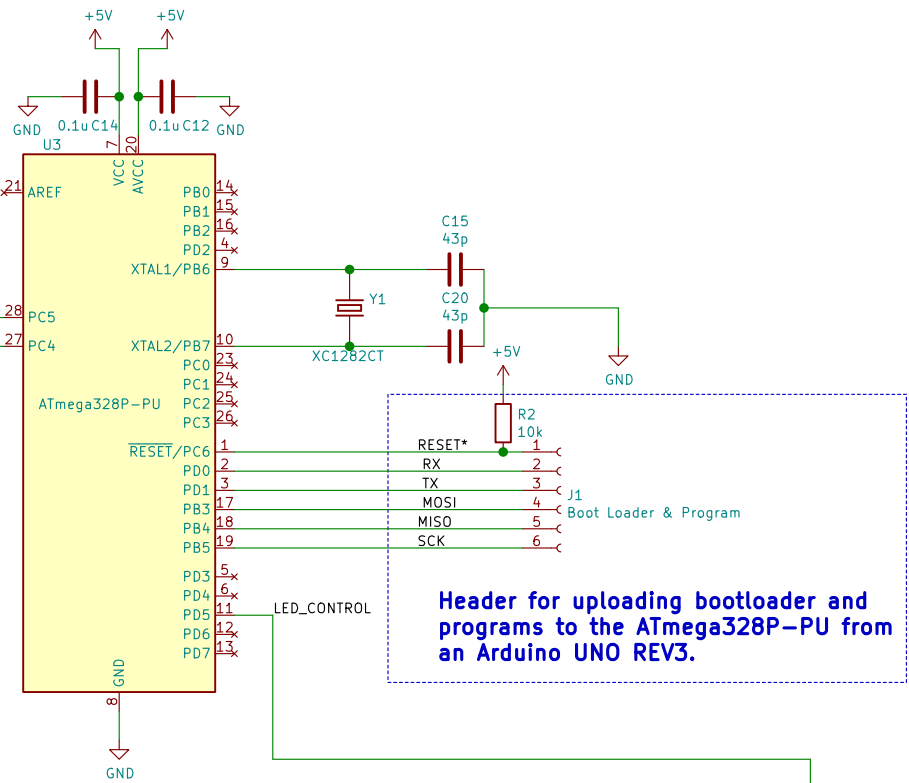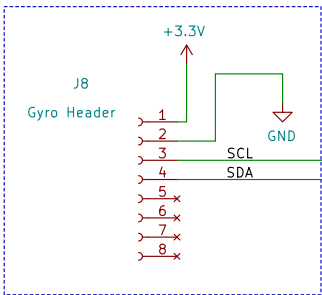

Header for uploading bootloader and programs to the ATmega328P-PU from an Arduino UNO REV3.

Array of Addressable LEDs

