



Connector for charge board and input voltage (battery)

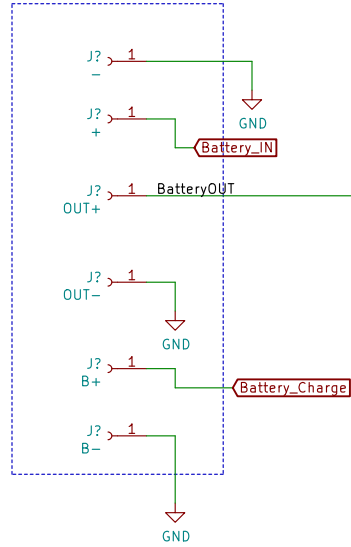


3.7V to 3.3V conversion for Gyro and Accelerometer daughterboard


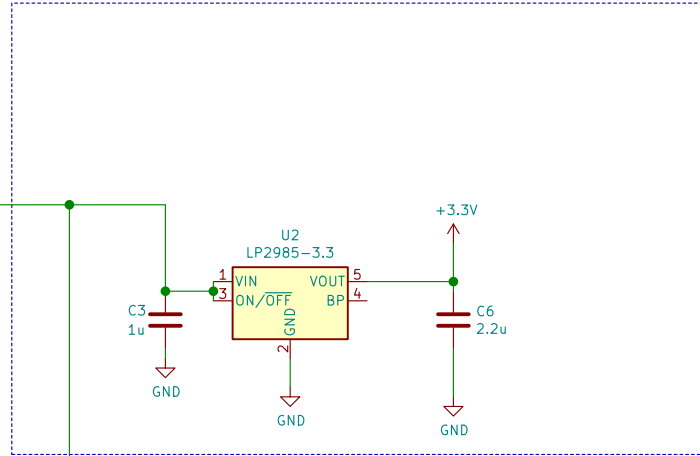


Angular velocity responsive LED Cube

Header for Gyro and Accelerometer daughterboard

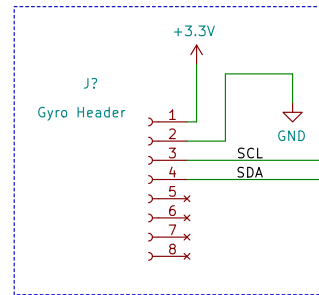

3.7V to 5V conversion for the ATmega328P-PU microcontroller

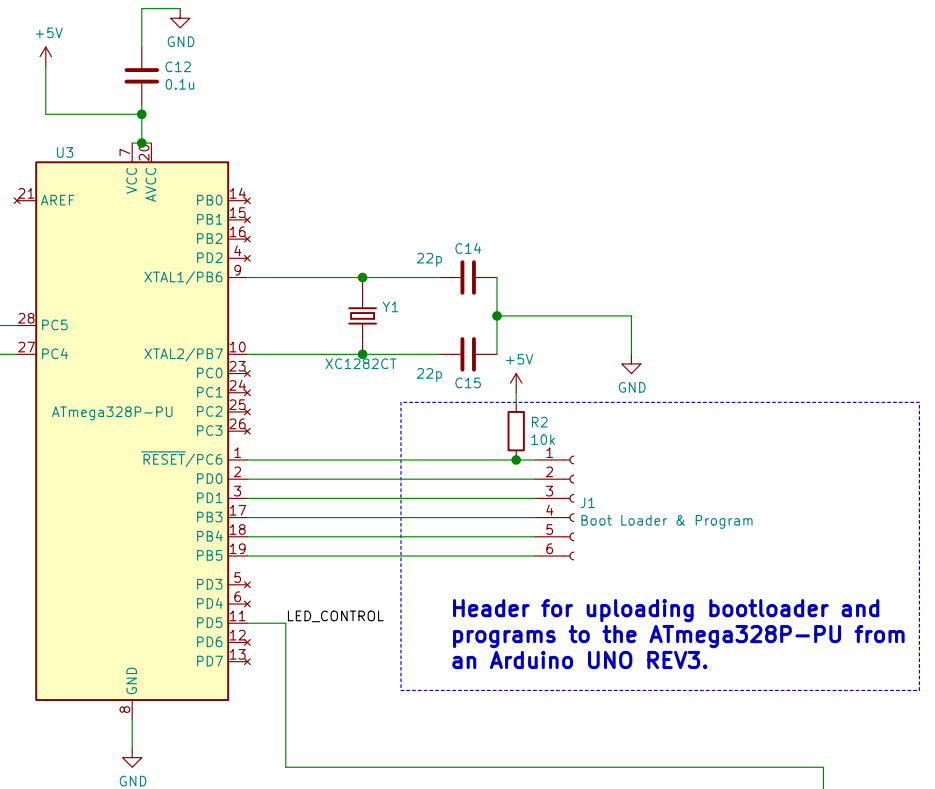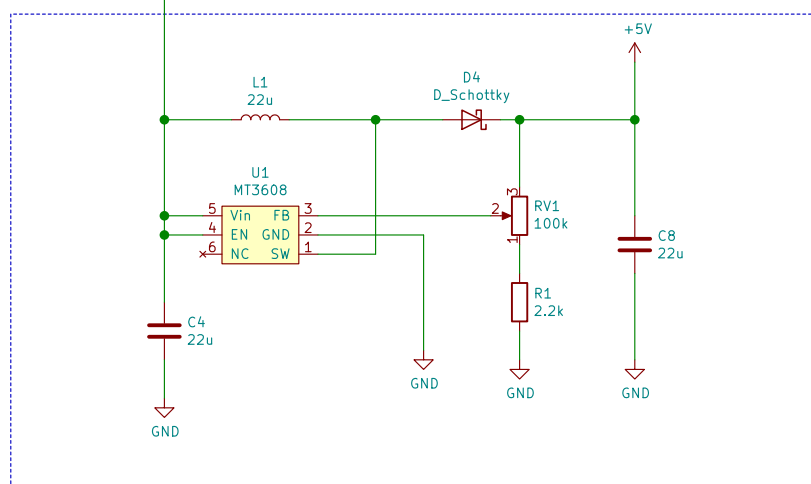

Header for uploading bootloader and programs to the ATmega328P-PU from an Arduino UNO REV3.

Array of Addressable LEDs

