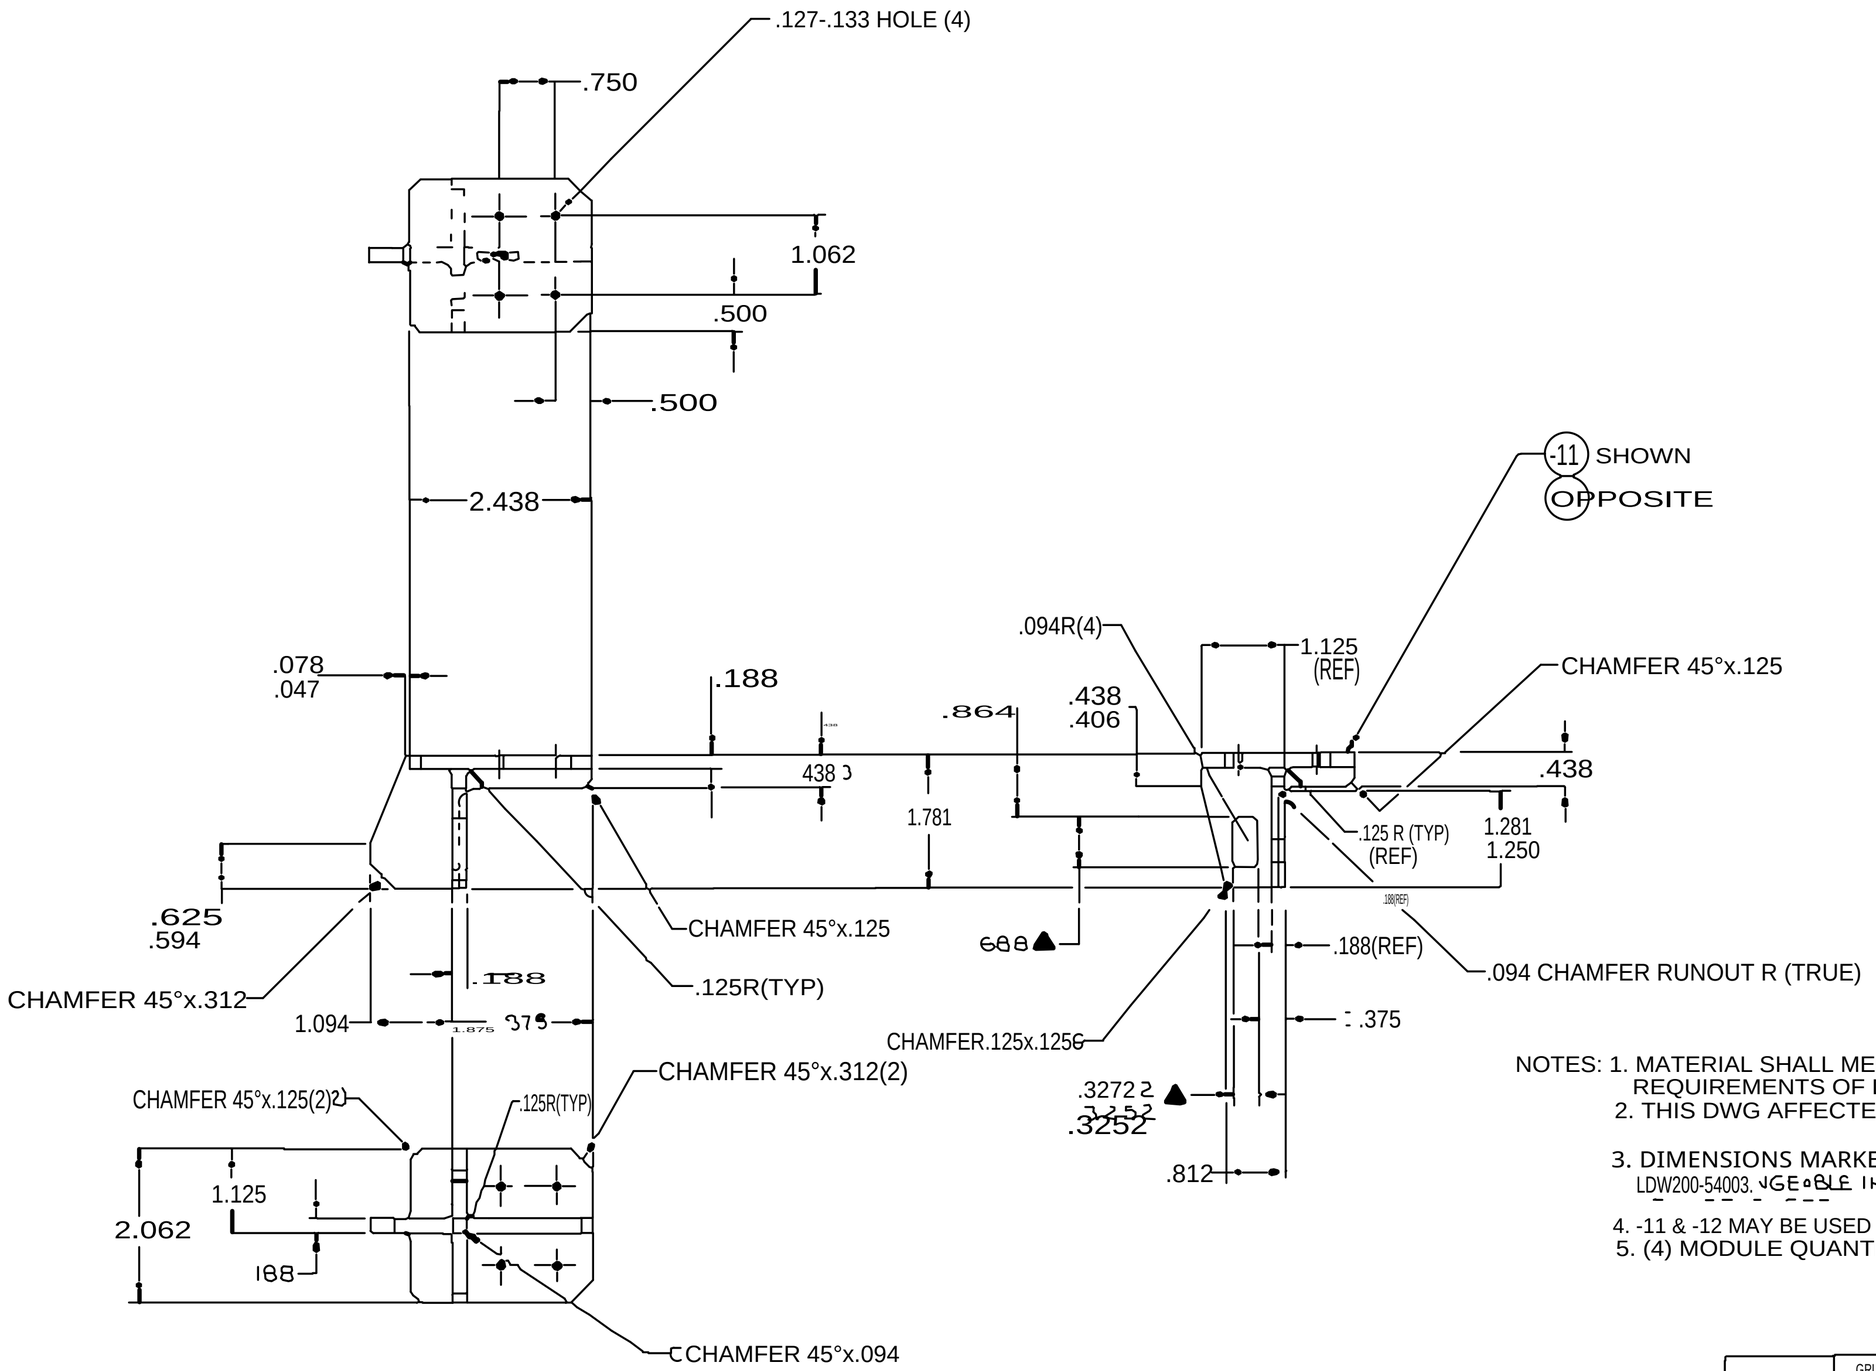


MANUFACTURING OPERATIONS
UNLESS OTHERWISE SPECIFIED
NOTES CHECKED APPLY TO THIS DWG.

PART NUMBER AND ALL OTHER MARKINGS IN REGION MARKED USE BOTH SIDES IF NECESSARY.	✓
FILLET AND INSIDE CORNER RADII TOLERANCES .016R TO .062R ± .010 .063R TO .250R ± .015 OVER .250R ± .030	✓
DEPTH SHOWN FOR TAPPED HOLES IS FULL THDS. 2-3 IMP. THDS. BEYOND PERMISSIBLE	
EXTERNAL THREAD LENGTH SHOWN INCLUDES 2 IMPERFECT THREADS MAX.	
DO NOT CADMIUM PLATE & PAINT HOLES OR SURFACES MARKED WITH DOUBLE ASTERISK.	
MISMATCH STEP OF ± .005 PERMISSIBLE DUE TO CHANGE OF CUTTERS AT INSIDE INTERSECTING SURFACES.	
DIAMETERS MARKED MUST BE CONCENTRIC WITHIN FULL INDICATOR READING	
HOLES MUST BE KEPT FREE OF CHROME PLATING SOLUTION.	
ALL DIMENSIONS SHOWN TO BE MET AFTER CADMIUM PLATING. THICKNESS OF PLATE .0003 MIN TO .0005 MAX. MIN THICKNESS TO BE .0002 ON THREADED AREAS. NO ALLOWANCES FOR PLATING IN	
SURFACE ROUGHNESS HOLES PER MIL-STD-10	✓
125 200 FOR ALL HOLES	✓
REMOVE ALL BURRS. BREAK ALL EDGES .015-.031	✓
INSPECTION INFORMATION MINIMUM PERMISSIBLE AVERAGE EDGE DISTANCE MARKED ●	
SYMBOL √ DENOTES SURFACE TO BE MACHINED	
UNLESS OTHERWISE SPECIFIED TOLERANCE ON FLANGES IS ± 1/32	
LENGTHS OF AN, NAS & MS AL ALY RIVETS SHORTER THAN 1 INCH ARE NOT SPECIFIED	
TOLERANCE ON LOFTED DELINEATIONS IS	

NOTES: 1. MATERIAL SHALL MEET THE ULTRASONIC REQUIREMENTS OF LSP-14-16100, TABLE II.
2. THIS DWG AFFECTED BY LFM-4.
3. DIMENSIONS MARKED ▲ FORMS PART OF AN LDW200-54003, VGEABLE INTERFACE AS SHOWN ON
4. -11 & -12 MAY BE USED ON LM-4(34)THRU LM-15(45).
5. (4) MODULE QUANTITIES REQUIRED PER LFM-4.

GRUMMAN AIRCRAFT ENGRG CORP. BETHPAGE, L. I., NEW YORK	
SIZE	CODE IDENT NO. LDW200M10001
LM	
MODEL OR END ITEM	3.00
SCALE FULL	SHEET 1