

The Time Period & Frequency of Trigonometric Functions

We can think of the angle of the trigonometric function increasing over time with a Frequency f and Time Period T as the radial vector rotates around the origin. The sin and cos function graph show how the x and y radial coordinates or components change with time, and we can use these to show how the Frequency & Time Period change when the angle θ increases at a faster or slow rate. We can parameterise the angle θ with a constant angular frequency ω and a time t . The definition of the frequency or the period is then the time it takes to complete 1 full circle of 360° or 2π radians and has the equation:

$$\text{Eq. 1} \quad f = \frac{1}{T}$$

Where the angular displacement θ is:

$$\text{Eq. 2} \quad \theta = \omega t = 2\pi f t = \frac{2\pi t}{T}$$

And ωt is the angular displacement of constant angular speed multiplied by time t for a constant frequency f . This gives the following equation for the y component of the radial vector:

$$y = \sin(\omega t) = \sin(2\pi f t)$$

In figure 1. Is the plot of two sin functions with different frequencies from $t=0$ to $t=5$. In the case where $f = 0.5$:

$$y = \sin(\pi t)$$

On the graph is labelled T for the period, which is the time for one cycle where the waveform returns to the same place. In the graph of $f = 0.5$ this is from 0.5 to 2.5 and $T = 2$. You can also use Eq. 1 where $1/T = 0.5$:

In the second waveform is the plot of the equation:

$$y = \sin(5\pi t)$$

there are 2.5 cycles from 0 to 1 the period is therefor $1/2.5 = 0.4$ seconds and the frequency 2.5.

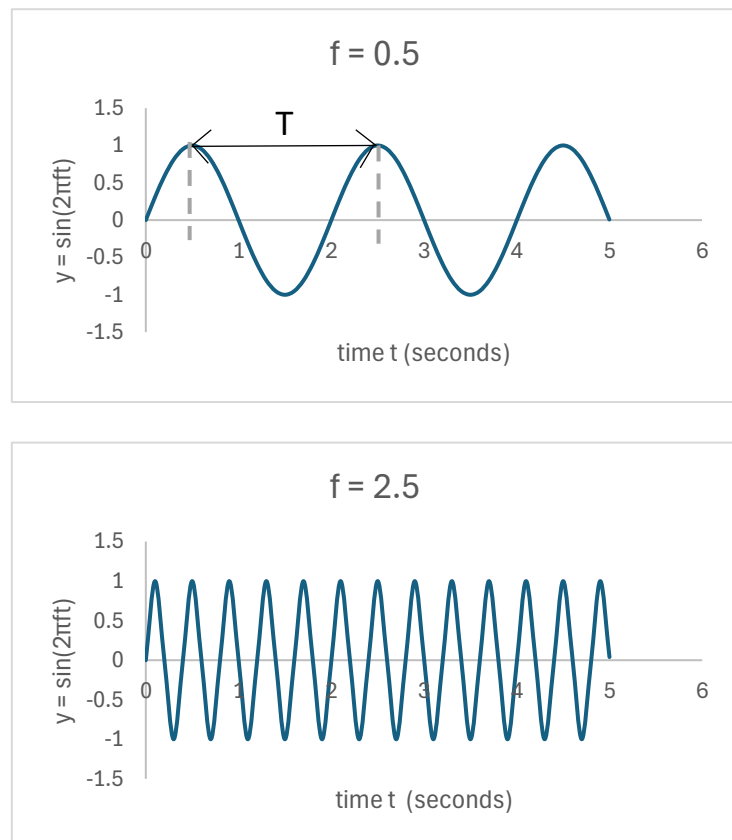


Figure 1.

Superposition of Trigonometric Functions

Superposition is a summation of trigonometric functions or waveforms changing the components and magnitude of a function, we can compose a waveform or function in the following ways:

$$y = A \sin(\omega_1 t) + B \cos(\omega_2 t)$$

Where A & B are the amplitude of the waveforms or the magnitude of the r vector, ω_1 & ω_2 are the angular frequencies of sin or cosine function. Figure 2 shows an example of the waveform with the equation from $t=0$ to $t=12$:

Eq. 3

$$y = 4 \sin(2\pi t) + 5 \cos(0.5\pi t)$$

In Eq. 3 the first sin function has an amplitude of 4 and a frequency of 1, the cos function has an amplitude of 5 and a frequency of 0.25. In figure 2. The plot of Eq.3 shows a maximum amplitude of the components and has two frequencies of $f=1/T = 0.25\text{Hz}$ & 1Hz .

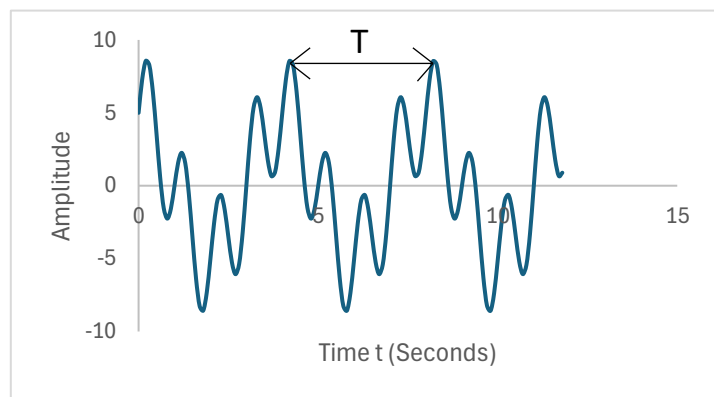


Figure 2.

Beat Frequency

The Beat frequency is the interference of more than one waveform with similar frequencies. The waveforms constructively interfere to a maximum amplitude and destructively interfere to a minimum amplitude, resulting in an interference pattern or envelope that has a different frequency to the angular frequency of the component waveforms.

Figure 3 shows the waveform of the equation:

$$y = 5 \sin(5\pi t) + 3 \cos(5.5\pi t)$$

As you can see in the waveform there is constructive interference where the amplitudes add together to a maximum. The angular frequency of each function is 5π and 5.5π the frequencies of each are 2.5 and 2.75.

The interference frequency is then:

$$f_I = |f_1 - f_2| = 0.25 \text{ Hz}$$

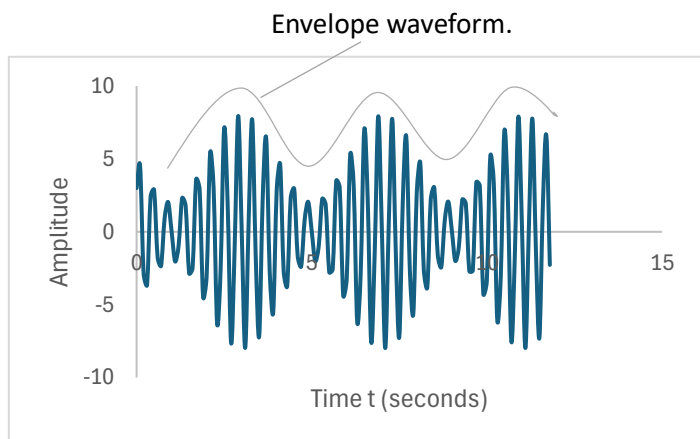


Figure 3.