

Production Supporting Systems in Factories

ระบบสนับสนุนการผลิตในโรงงานอุตสาหกรรม


Smart Sensors

Smart sensors

- A smart sensor is a device that
 - takes input from the physical environment
 - perform predefined functions upon detection of specific input
 - then process data before passing it on.
- Your mobile phone running `Node-Red` can be programmed to be very **smart** sensors.

Module 4-1: Mobile sensors

- Use `Node-Red` from a mobile phone.
- Flow
 - `inject` , `exec` , `debug` , `mqtt out`

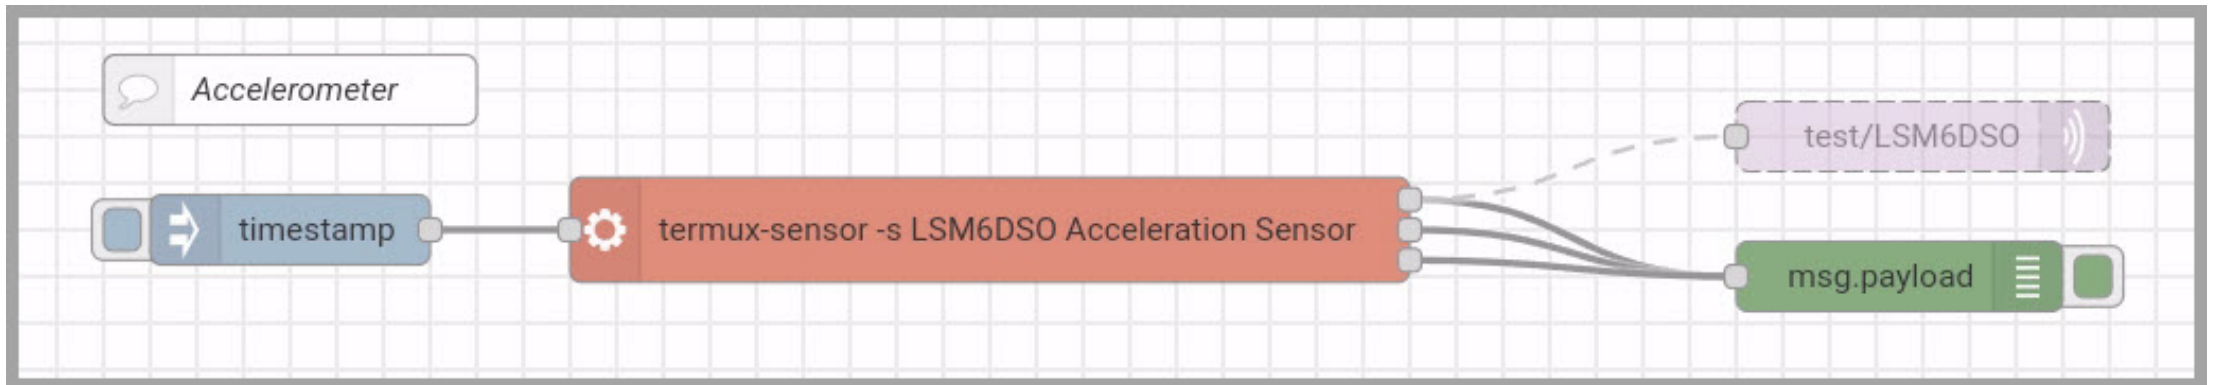

- **exec node**
 - Command: `termux-sensor -s LSM6DS0 Acceleration Sensor`
 - *Your sensor name will be different.*
 - Output: `while the command is running`

The screenshot shows a dialog box titled "Edit exec node". At the top, there are three buttons: "Delete", "Cancel", and "Done". Below the buttons is a tabbed interface with the "Properties" tab selected. The "Properties" tab contains several configuration fields:

- Command:** A text field containing the command `termux-sensor -s LSM6DS0 Acceleration Sensor`.
- Append:** A checkbox labeled "Append" is unchecked. To its right is a text field containing `msg. payload`.
- extra input parameters:** A text field containing the text `extra input parameters`.
- Output:** A dropdown menu with the selected option being `while the command is running - spawn mode`.
- Timeout:** A text field containing `optional` followed by the unit `seconds`.
- Hide console:** A checkbox labeled "Hide console" is unchecked.
- Name:** A text field containing the text `Name`.

- mqtt out node
 - Server : Create new server similar to M3-1
 - Topic : test/LSM6DS0
 - *Your topic will be different.*
 - QoS : 1

Edit mqtt out node

Delete Cancel Done

Properties

Server Prodsup


Topic test/LSM6DS0

QoS 1 Retain true

Name Name

Tip: Leave topic, qos or retain blank if you want to set them via msg properties.

- Resetting sensors

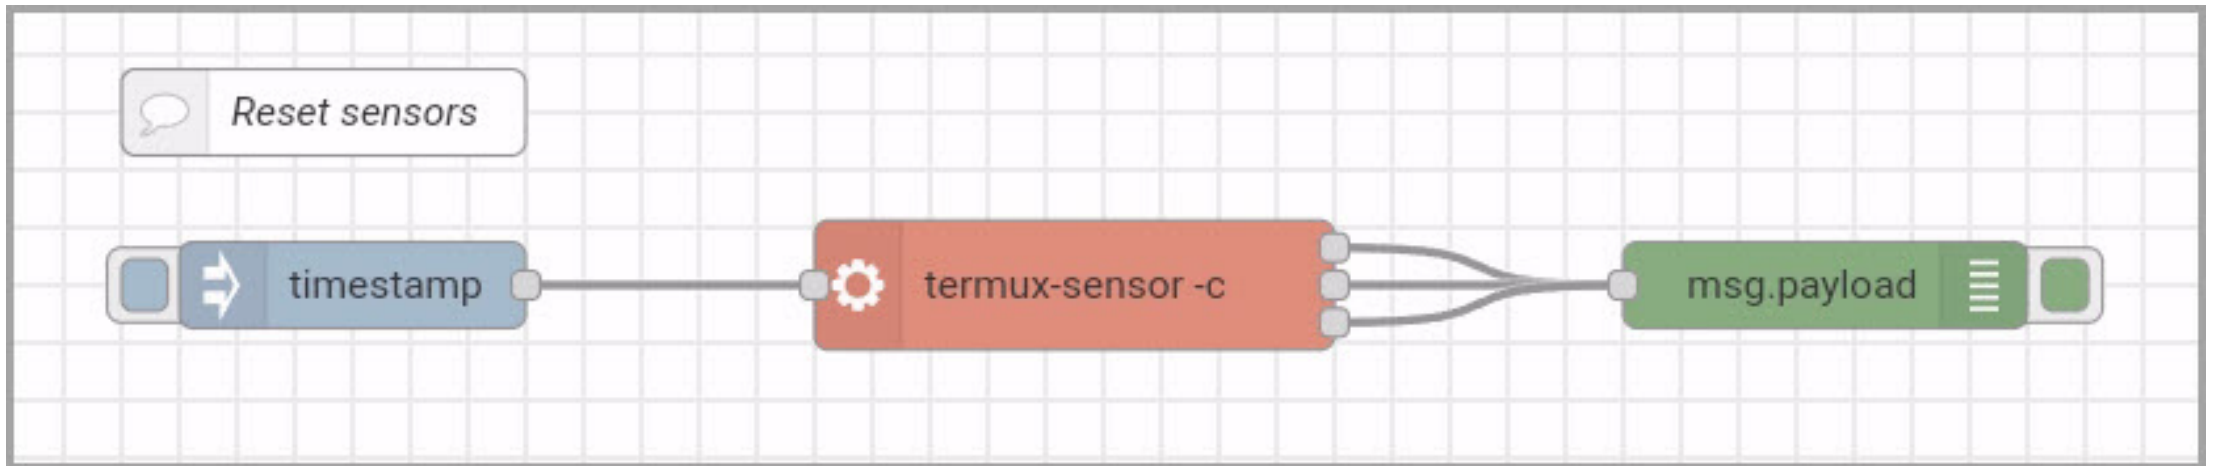

- **exec node**
 - **Command:** `termux-sensor -c`
 - **Output:** when the command is complete ...

Edit exec node

Delete

Cancel

Done

Properties

Command

termux-sensor -c

Append

☐ msg. payload

Output

when the command is complete - exec mode ▼

Timeout

seconds


Hide console

☐

Name

Module 4-2: Sensor Subscriber

- Use `Node-Red` from your computer
- Flow
 - `mqtt in`, `json`, `function`, `debug`

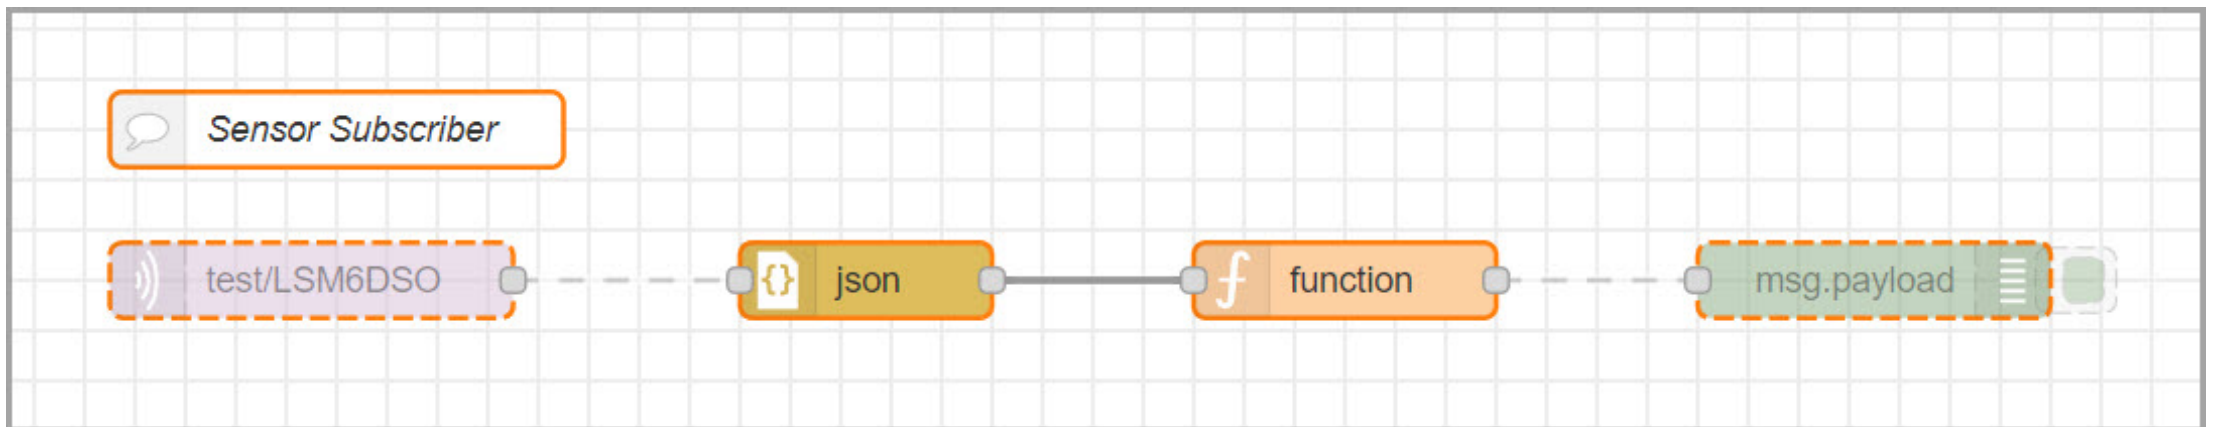

- mqtt in node
 - Topic : test/LSM6DS0
 - QoS : 1

Edit mqtt in node

Delete Cancel Done

Properties

Server ProdSup

Action Subscribe to single topic

Topic test/LSM6DS0

QoS 1

Output auto-detect (string or buffer)

Name Name

- json node
 - No need to adjust anything.

The screenshot shows a dialog box titled "Edit json node". At the top, there are three buttons: "Delete", "Cancel", and "Done". Below these is a tab labeled "Properties" with a gear icon. To the right of the tab are three icons: a gear, a document, and a window. The main area contains three fields: "Action" with a dropdown menu showing "Convert between JSON String & Object", "Property" with a text input containing "msg. payload", and "Name" with a text input containing "Name". At the bottom, there is a section titled "Object to JSON options" with a checkbox labeled "Format JSON string".

Edit json node

Delete Cancel Done

⚙️ **Properties** ⚙️ 📄 🖼️

🎯 Action Convert between JSON String & Object ▼


⋮ Property msg. payload

🏷️ Name Name

Object to JSON options

☐ Format JSON string


- **function** node (code on the next page)

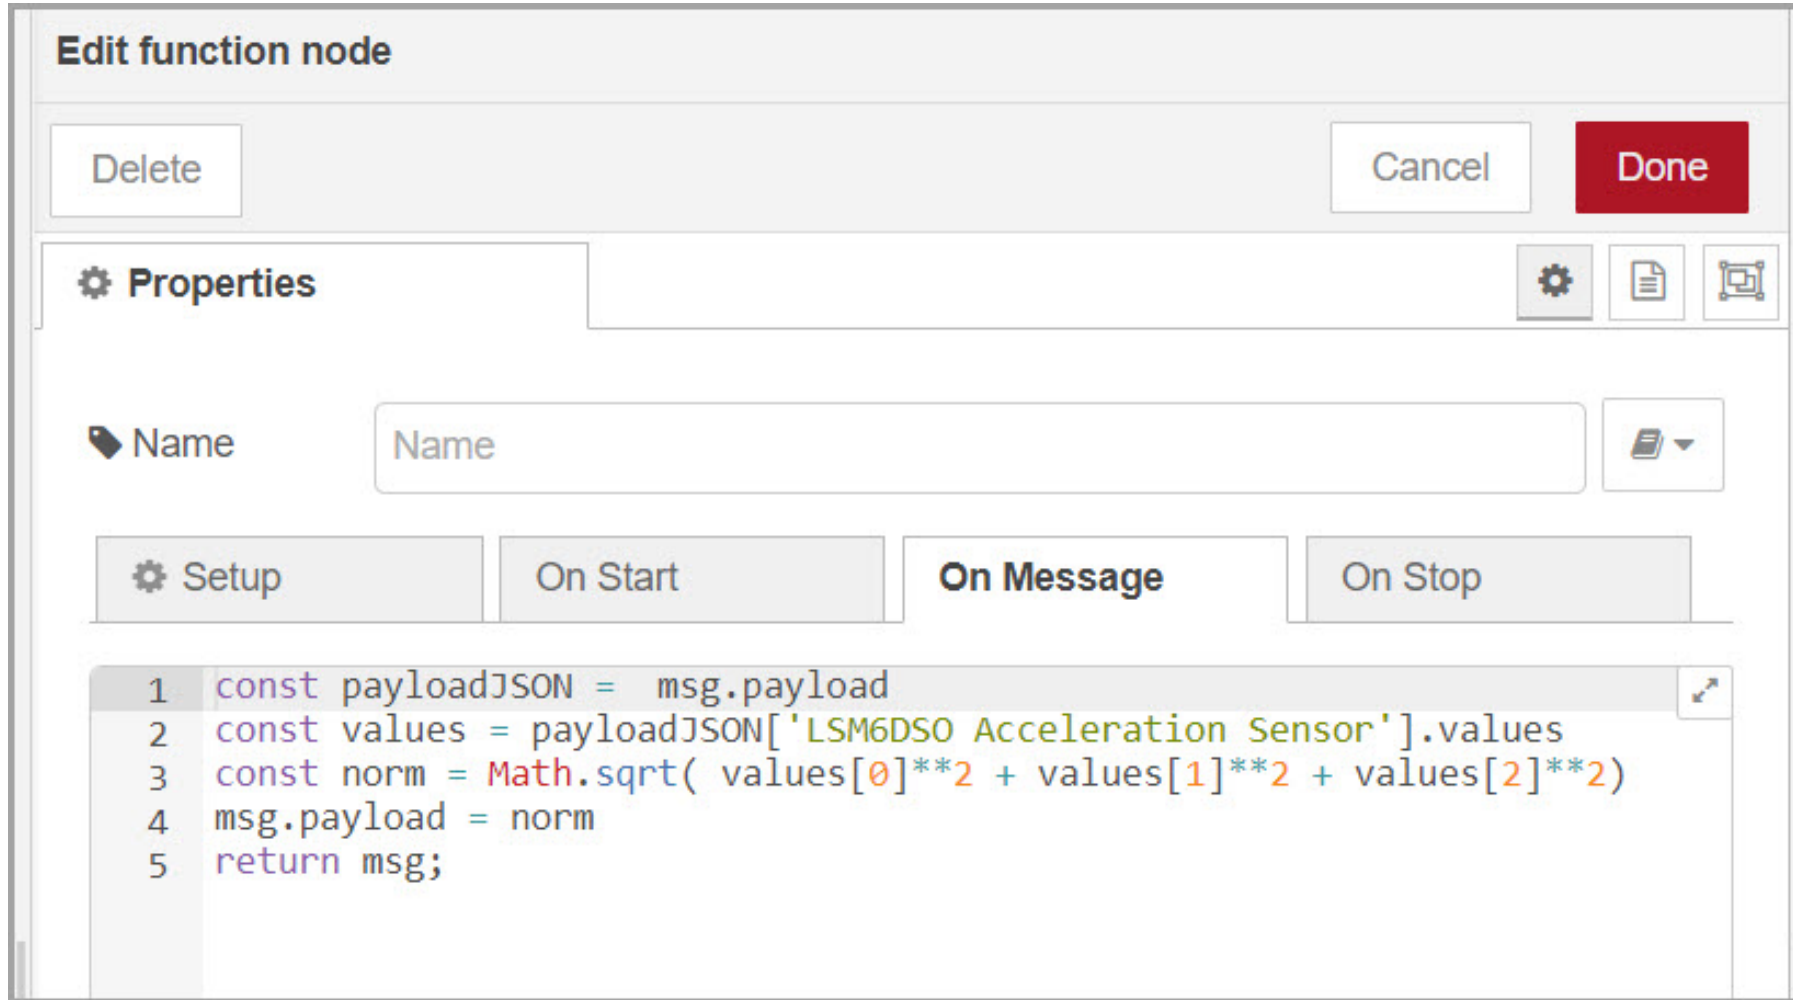

```
const payloadJSON = msg.payload;  
const values = payloadJSON['LSM6DSO Acceleration Sensor'].values;  
const norm = Math.sqrt(values[0] ** 2 + values[1] ** 2 + values[2] ** 2);  
msg.payload = norm;  
return msg;
```

Module 4-3: Fake sensors

- If you cannot use a mobile phone to send sensor data, you can create a fake sensor data from `Node-Red` in your computer.
- Flow
 - `inject` , `function` , `mqtt out`

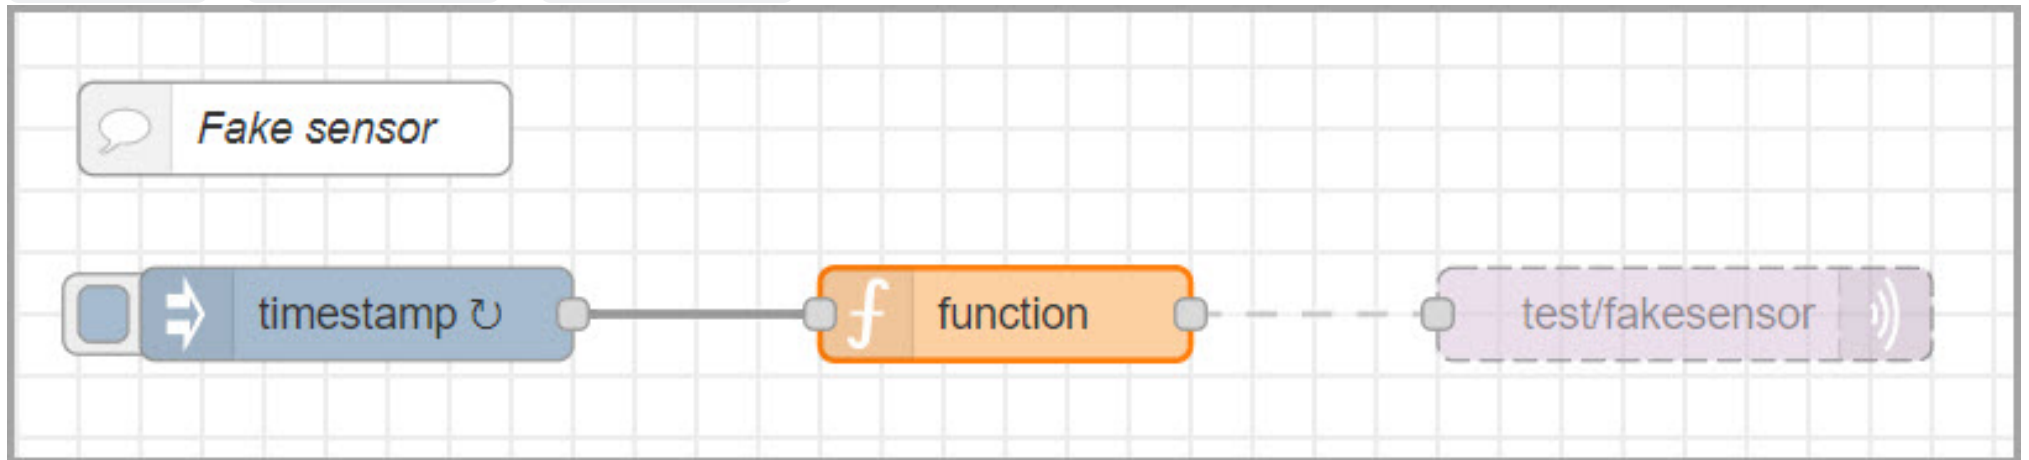

- inject node
 - Repeat : every 1 second

Edit inject node

Delete
Cancel
Done

⚙ Properties
⚙
📄
🖨

🔑 Name
Name

≡
msg. payload
=
timestamp
✕

≡
msg. topic
=
a_z
✕

+ add
inject now

☐ Inject once after 0.1 seconds, then

🔄 Repeat
interval

every 1 seconds

- **function node**

Edit function node

Delete

Cancel

Done

Properties

Name

Setup

On Start

On Message

On Stop

```
1 msg.payload = Math.random()
2 return msg;
```

```
msg.payload = Math.random();  
return msg;
```

- mqtt out node
 - Topic : test/fakesensor
 - QoS : 1

Edit mqtt out node

Delete Cancel Done

Properties

Server: ProdSup


Topic: test/fakesensor

QoS: 1 Retain: true

Name: Name

Tip: Leave topic, qos or retain blank if you want to set them via msg properties.

- Lastly, we can listen to the sensors.
- Flow
 - mqtt in , function , debug

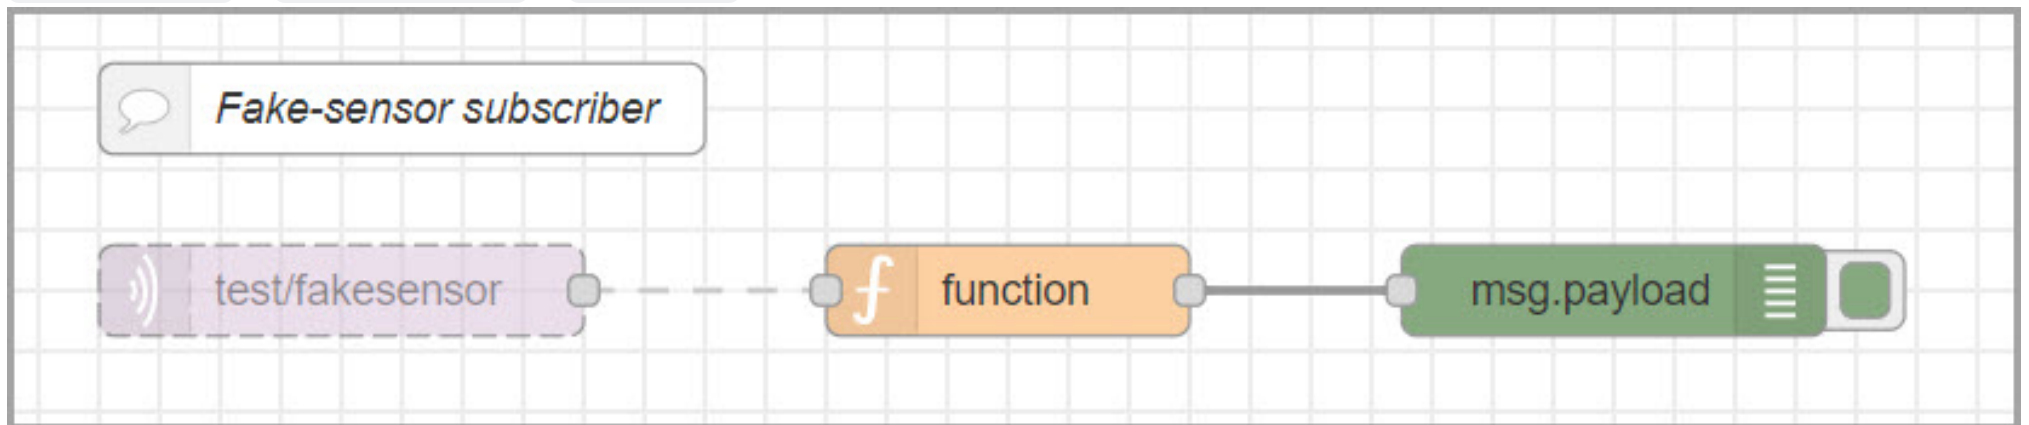

- mqtt in node
 - Topic : test/fakesensor
 - QoS : 1

Edit mqtt in node

DeleteCancelDone

Properties

Server

ProdSup

Action

Subscribe to single topic

Topic

test/fakesensor

QoS

1

Output

auto-detect (string or buffer)

Name

Name

- function node

Edit function node

Delete

Cancel

Done

Properties

Name

Setup

On Start

On Message

On Stop

1 `const payload = msg.payload;`

2 `msg.payload = parseFloat(payload);`

3 `return msg;`


```
const payload = msg.payload;  
msg.payload = parseFloat(payload);  
return msg;
```