


SR SERIES 03

1. PERFORMANCE

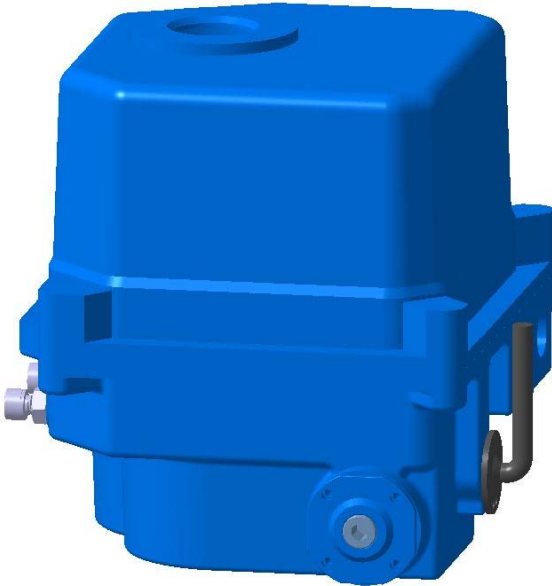


Model	SR 03
Max Output Torque	3kg·m (30N·m)
Operating Time (90°)	15 sec. (50Hz)
Spring Return Time (90°)	6 sec.
Mounting Base (ISO 5211)	F03 / F05 / F07
Weight	25Kg

2. SPECIFICATION


Enclosure	IP67 (Standard)
	Explosion Proof & Watertight Enclosure Ex d II B T4 (Option)
Ambient Temperature	-20°C ~ 55°C
Power Supply	1Ph 110/230VAC 50/60Hz
	3Ph 380/440VAC 50/60Hz
	DC24V
Limit Switch	Open/Close Limit Switch (250VAC 15A)
Travel Angle	90° ± 5°
Indicator	Continuous Position Indicator
Mechanical Stops	External Adjustable Screws
Space Heater	20W
Conduit Entries	2-PF 3/4"
	Option : 2-M20 , 2-NPT 3/4"
Lubrication	Sheel ALVANIA EP2
Materials	Aluminium Alloy
Surface Treatment	Anodizing
Coating	Polyester (TGIC - Free)

3. DIMENSSION

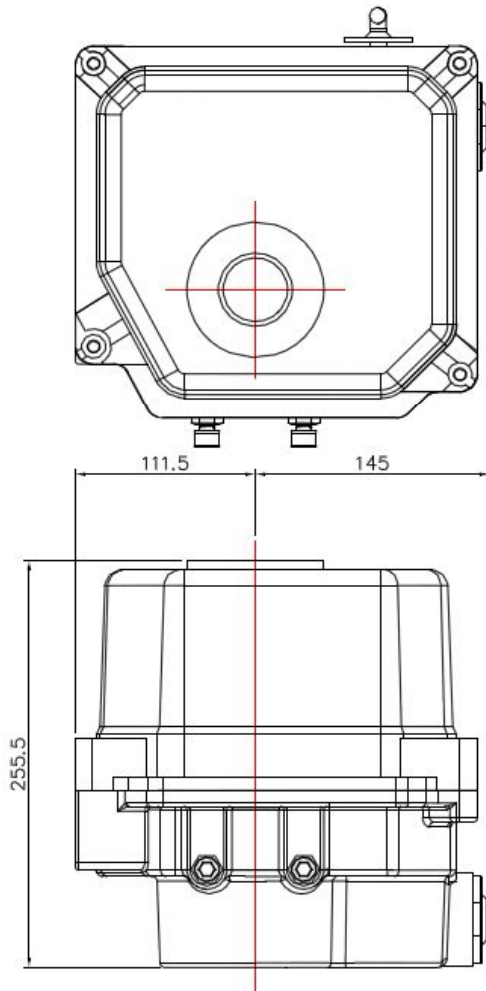

BASE B.C.D

ISO 5211 F03(Ø35 M5TAP DP8)
 ISO 5211 F05(Ø50 M8TAP DP10)
 ISO 5211 F07(Ø70 M8TAP DP13)

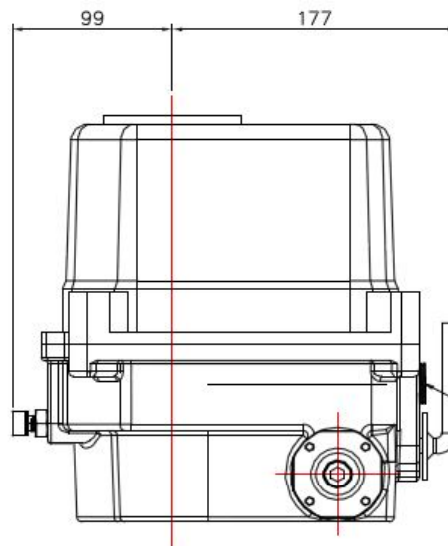

"A"
PF3/4
M20
NPT3/4

CABLE ENTRIES

CABLE
 ENTRIES
 2 - "A"