Q-PALL PLASTIC PALLETS

Technical specifications
Datasheet, edition October 2026

1200 x 800 mm · EURO PALLET

Plastic pallet 1200 x 800 x 149 open deck 9 feet light

LIGHT | Open deck | 9 feet | Nestable

TOP



BOTTOM



2,500 kg	1,000 kg	–
Static load on a flat floor	Dynamic load by forklift or pallet truck	Racking load Not for racking

DIMENSIONS AND WEIGHT

Article number	2.QP1208LB9FR
Length	1200 mm
Width	800 mm
Height	149 mm
Weight	5.4 kg

CONSTRUCTION AND MATERIAL

Top deck	Open deck
Bottom	9 feet
Load class	Light
Nestable	Yes
Material	Mix HDPE / PP / LDPE
Colour	Black (standard), other colours on request
ISPM 15	Exempt (no treatment needed)

DELIVERY AND DOCUMENTATION

Production location	Lleida (ES)
Ordering in stacks	45 pallets per stack (stack dimensions approx. 1,200 x 800 x 2,360 mm)
PPWR (EU 2025/40)	Declaration of conformity available

SIMILAR VERSIONS AND PRODUCTION LOCATIONS


ARTICLE NUMBER	PRODUCTION LOCATION	DIMENSIONS (MM)	WEIGHT	STATIC	DYNAMIC	RACKING
2.QP1208LB9FR This datasheet	Lleida (ES)	1200 x 800 x 149	5.4 kg	2,500 kg	1,000 kg	–
3.QP1208LB9FR	Balk (NL)	1200 x 800 x 150	5.4 kg	2,500 kg	1,000 kg	–
1.QP1208LB9FR	Ribe (DK)	1200 x 800 x 150	5.1 kg	2,500 kg	1,000 kg	–
QP1208LB9FR	On request	1200 x 800 x 150	5.1 kg	2,500 kg	1,000 kg	–

Click an article number for the page and datasheet of that version. We deliver from the factory closest to you. Small differences in height, weight and load capacity between the versions are possible.

1200 x 800 mm · EURO PALLET

Plastic pallet 1200 x 800 x 149 open deck 9 feet light

TECHNICAL DRAWING

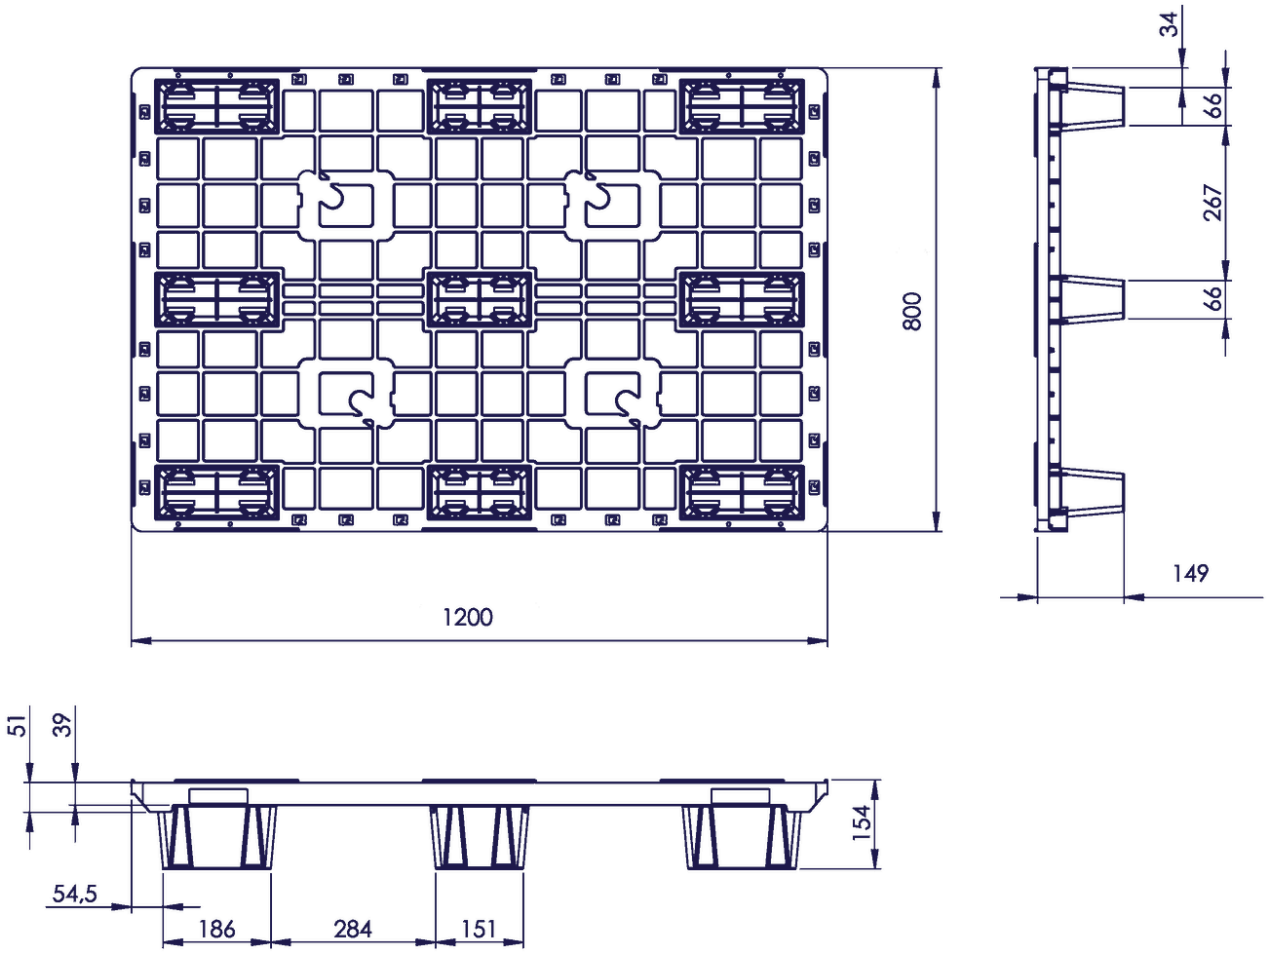

Top view and side views, dimensions in mm.

TEST CONDITIONS AND TOLERANCES

- Dimensional tolerance of the pallet: +5 / -5 mm. Weight tolerance: +5 / -5 %.
- We test our pallets with an evenly distributed, stable and homogeneous load of bagged goods, for a predetermined period at an ambient temperature of 20 °C. Different load conditions may lead to different results and must be assessed separately.