Q-PALL PLASTIC PALLETS

Technical specifications
Datasheet, edition October 2026

1100 x 1100 mm · CONTAINER PALLET


Plastic pallet 1100 x 1100 x 150 open deck 3 runners medium

MEDIUM | Open deck | 3 runners

TOP



BOTTOM

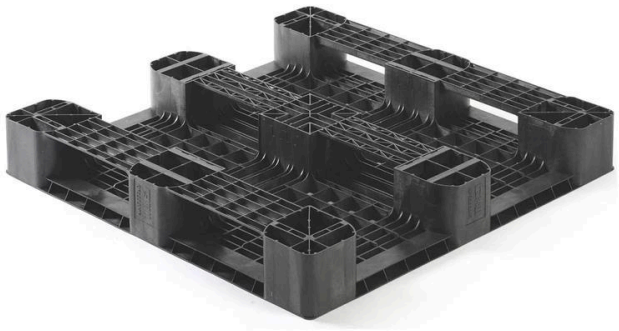

7,500 kg	1,250 kg	250 kg
Static load on a flat floor	Dynamic load by forklift or pallet truck	Racking load in pallet racking

DIMENSIONS AND WEIGHT

Article number	3.QP1111MB3R-AS
Length	1100 mm
Width	1100 mm
Height	150 mm
Weight	11.7 kg

CONSTRUCTION AND MATERIAL

Top deck	Open deck
Bottom	3 runners
Load class	Medium
Nestable	No
Material	Mix HDPE / PP
Colour	Black (standard), other colours on request
ISPM 15	Exempt (no treatment needed)

DELIVERY AND DOCUMENTATION

Production location	Marktoberdorf (DE)
Ordering in stacks	17 pallets per stack (stack dimensions approx. 1,100 x 1,100 x 2,550 mm)
PPWR (EU 2025/40)	Declaration of conformity available

SIMILAR VERSIONS AND PRODUCTION LOCATIONS


ARTICLE NUMBER	PRODUCTION LOCATION	DIMENSIONS (MM)	WEIGHT	STATIC	DYNAMIC	RACKING
3.QP1111MB3R-AS This datasheet	Marktoberdorf (DE)	1100 x 1100 x 150	11.7 kg	7,500 kg	1,250 kg	250 kg
1.QP1111MB3R-AS	Balk (NL)	1100 x 1100 x 150	11.7 kg	7,500 kg	1,250 kg	250 kg
QP1111MB3R-SSB	Balk (NL)	1100 x 1100 x 150	12.3 kg	7,500 kg	1,250 kg	250 kg
2.QP1111MB3R-AS	On request	1100 x 1100 x 150	11.7 kg	7,500 kg	1,250 kg	250 kg

Click an article number for the page and datasheet of that version. We deliver from the factory closest to you. Small differences in height, weight and load capacity between the versions are possible.

1100 x 1100 mm · CONTAINER PALLET

Plastic pallet 1100 x 1100 x 150 open deck 3 runners medium

TECHNICAL DRAWING

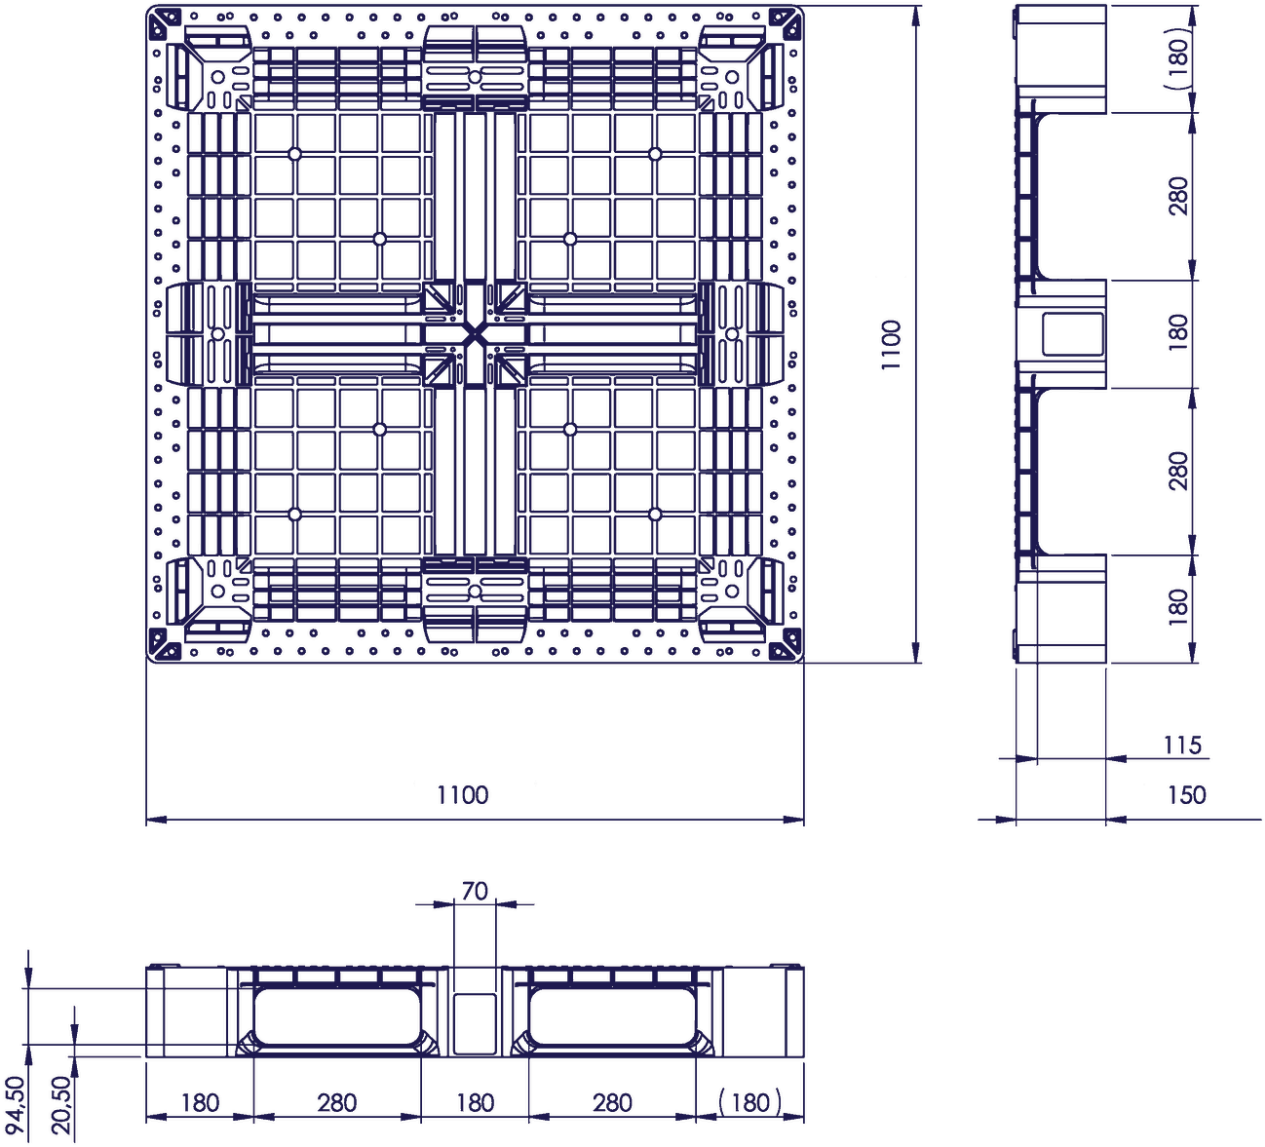

Top view and side views, dimensions in mm.

TEST CONDITIONS AND TOLERANCES

- The racking load is determined in a test with 25 kg bags on a conventional pallet racking system.
- Dimensional tolerance of the pallet: +5 / -5 mm. Weight tolerance: +5 / -5 %.
- We test our pallets with an evenly distributed, stable and homogeneous load of bagged goods, for a predetermined period at an ambient temperature of 20 °C. Different load conditions may lead to different results and must be assessed separately.