Q-PALL PLASTIC PALLETS

**Technical specifications**
Datasheet, edition October 2026

1100 x 1100 mm · CONTAINER PALLET

# Plastic pallet 1100 x 1100 x 150 open deck 6 runners medium

MEDIUM | Open deck | 6 runners

TOP



BOTTOM



| 7,500 kg | 1,250 kg | 250 kg |
|---|---|---|
| Static load on a flat floor | Dynamic load by forklift or pallet truck | Racking load in pallet racking |

## DIMENSIONS AND WEIGHT

| | |
|---|---|
| Article number | 2.QP1111MB6R-AS |
| Length | 1100 mm |
| Width | 1100 mm |
| Height | 150 mm |
| Weight | 13.1 kg |

## CONSTRUCTION AND MATERIAL

| | |
|---|---|
| Top deck | Open deck |
| Bottom | 6 runners |
| Load class | Medium |
| Nestable | No |
| Material | Mix HDPE / PP |
| Colour | Black (standard), other colours on request |
| ISPM 15 | Exempt (no treatment needed) |

## DELIVERY AND DOCUMENTATION

| | |
|---|---|
| Production location | On request |
| Ordering in stacks | 17 pallets per stack (stack dimensions approx. 1,100 x 1,100 x 2,550 mm) |
| PPWR (EU 2025/40) | Declaration of conformity available |

## SIMILAR VERSIONS AND PRODUCTION LOCATIONS


| ARTICLE NUMBER | PRODUCTION LOCATION | DIMENSIONS (MM) | WEIGHT | STATIC | DYNAMIC | RACKING |
|---|---|---|---|---|---|---|
| 2.QP1111MB6R-AS This datasheet | On request | 1100 x 1100 x 150 | 13.1 kg | 7,500 kg | 1,250 kg | 250 kg |
| 1.QP1111MB6R-AS | Balk (NL) | 1100 x 1100 x 150 | 13.2 kg | 7,500 kg | 1,250 kg | 250 kg |
| 3.QP1111MB6R-AS | Marktoberdorf (DE) | 1100 x 1100 x 150 | 13.1 kg | 7,500 kg | 1,250 kg | 250 kg |

Click an article number for the page and datasheet of that version. We deliver from the factory closest to you. Small differences in height, weight and load capacity between the versions are possible.

1100 x 1100 mm · CONTAINER PALLET

# Plastic pallet 1100 x 1100 x 150 open deck 6 runners medium

## TECHNICAL DRAWING

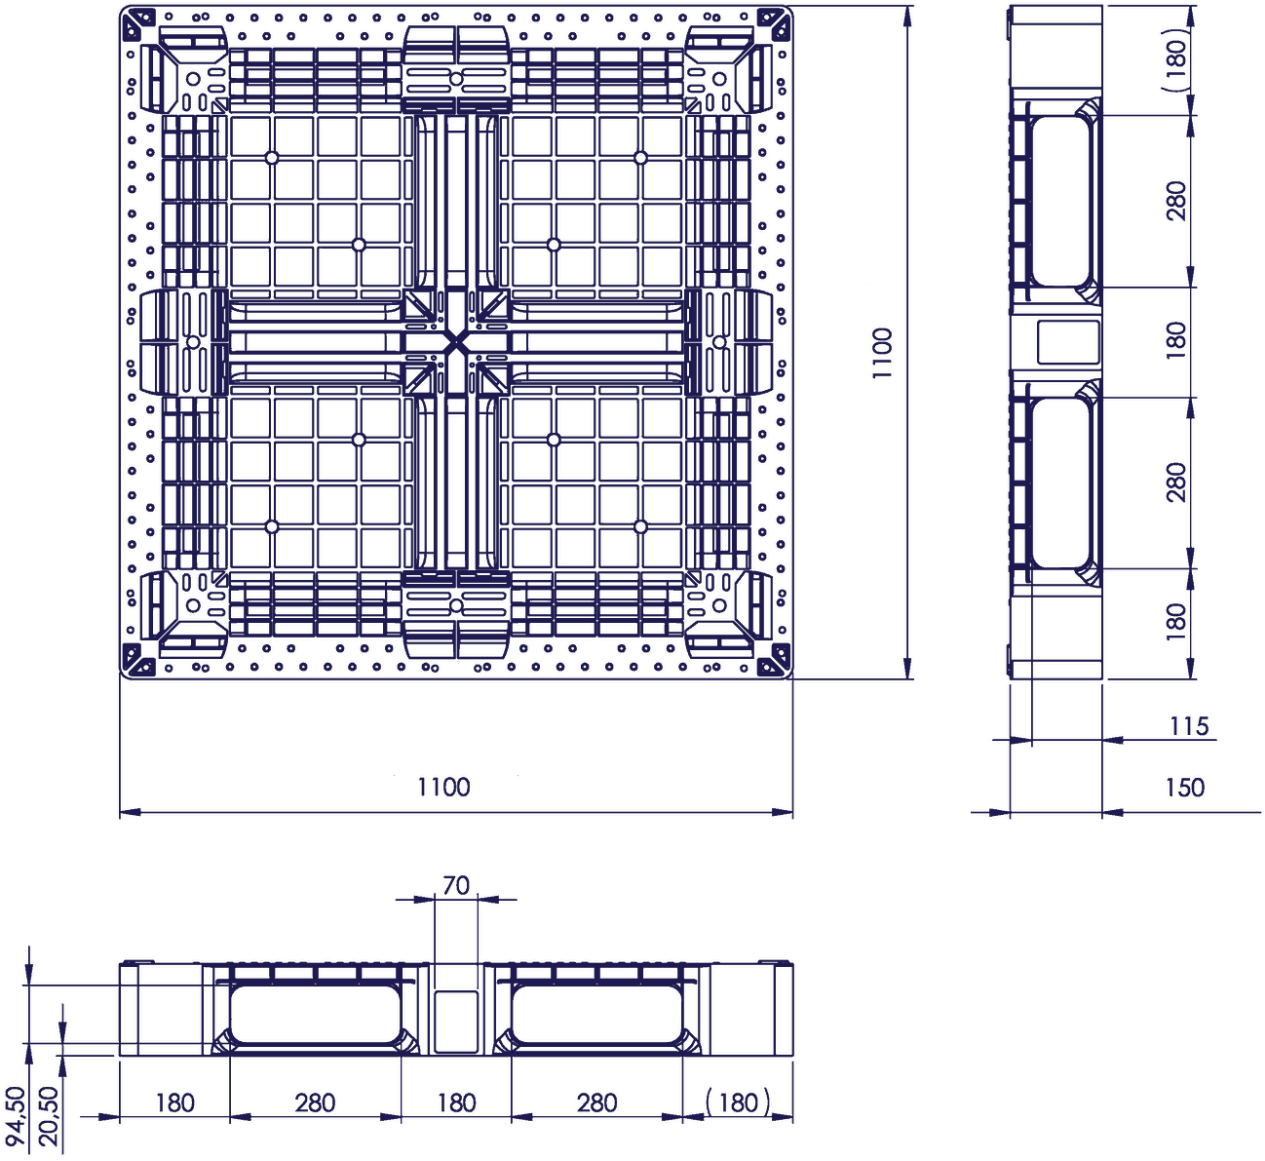


Top view and side views, dimensions in mm.

## TEST CONDITIONS AND TOLERANCES

- The racking load is determined in a test with 25 kg bags on a conventional pallet racking system.
- Dimensional tolerance of the pallet: +5 / -5 mm. Weight tolerance: +5 / -5 %.
- We test our pallets with an evenly distributed, stable and homogeneous load of bagged goods, for a predetermined period at an ambient temperature of 20 °C. Different load conditions may lead to different results and must be assessed separately.