Q-PALL PLASTIC PALLETS

Technical specifications
Datasheet, edition October 2026

1200 x 800 mm · EURO PALLET

Plastic pallet 1200 x 800 x 158 closed deck 3 runners light

LIGHT | Closed deck | 3 runners

TOP



BOTTOM



2,500 kg
Static load
on a flat floor

1,000 kg
Dynamic load
by forklift or pallet truck

–
Racking load
Not for racking

DIMENSIONS AND WEIGHT

Article number	3.QP1208LB3RR-CD
Length	1200 mm
Width	800 mm
Height	158 mm
Weight	8.4 kg

CONSTRUCTION AND MATERIAL

Top deck	Closed deck
Bottom	3 runners
Load class	Light
Nestable	No
Material	Mix HDPE / PP / LDPE
Colour	Black (standard), other colours on request
ISPM 15	Exempt (no treatment needed)

DELIVERY AND DOCUMENTATION

Production location	On request
Ordering in stacks	15 pallets per stack (stack dimensions approx. 1,200 x 800 x 2,370 mm)
PPWR (EU 2025/40)	Declaration of conformity available

SIMILAR VERSIONS AND PRODUCTION LOCATIONS


ARTICLE NUMBER	PRODUCTION LOCATION	DIMENSIONS (MM)	WEIGHT	STATIC	DYNAMIC	RACKING
3.QP1208LB3RR-CD This datasheet	On request	1200 x 800 x 158	8.4 kg	2,500 kg	1,000 kg	–
QP1208LB3RR-CD	On request	1200 x 800 x 150	7.3 kg	2,500 kg	1,000 kg	–
2.QP1208LB3RR-CD	On request	1200 x 800 x 160	7.9 kg	2,500 kg	1,000 kg	–

Click an article number for the page and datasheet of that version. We deliver from the factory closest to you. Small differences in height, weight and load capacity between the versions are possible.

1200 x 800 mm · EURO PALLET

Plastic pallet 1200 x 800 x 158 closed deck 3 runners light

TECHNICAL DRAWING

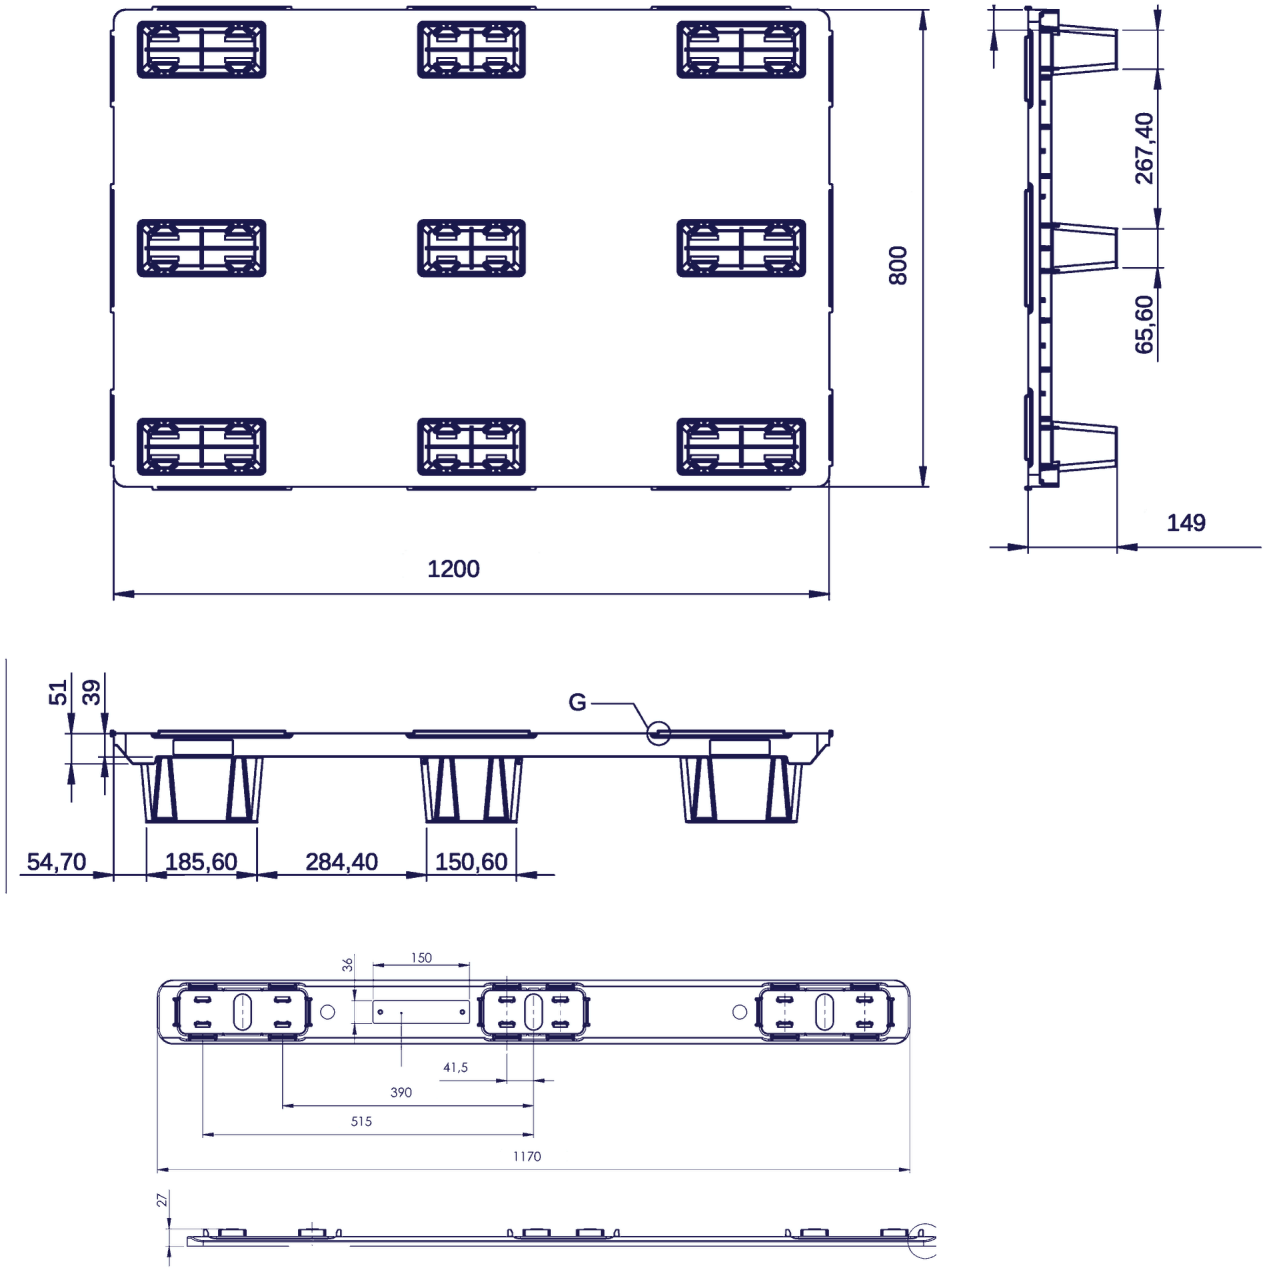

Top view and side views of the pallet; below, the click-on runner (3 per pallet). Dimensions in mm.

TEST CONDITIONS AND TOLERANCES

- Dimensional tolerance of the pallet: +5 / -5 mm. Weight tolerance: +5 / -5 %.
- We test our pallets with an evenly distributed, stable and homogeneous load of bagged goods, for a predetermined period at an ambient temperature of 20 °C. Different load conditions may lead to different results and must be assessed separately.