Q-PALL PLASTIC PALLETS

**Technical specifications**
Datasheet, edition October 2026

1100 x 1100 mm · CONTAINER PALLET


# Plastic pallet 1100 x 1100 x 165 closed deck 3 runners heavy

HEAVY | Closed deck | 3 runners

TOP



BOTTOM

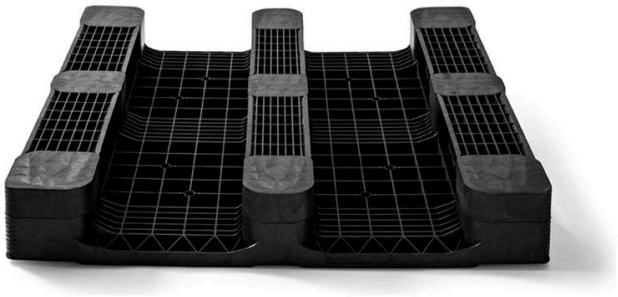

| 7,500 kg | 2,000 kg | 1,000 kg |
|---|---|---|
| Static load on a flat floor | Dynamic load by forklift or pallet truck | Racking load in pallet racking |

## DIMENSIONS AND WEIGHT

| | |
|---|---|
| Article number | QP1111HB3RR-CD |
| Length | 1100 mm |
| Width | 1100 mm |
| Height | 165 mm |
| Weight | 21.5 kg |

## CONSTRUCTION AND MATERIAL

| | |
|---|---|
| Top deck | Closed deck |
| Bottom | 3 runners |
| Load class | Heavy |
| Nestable | No |
| Material | Mix HDPE / PP |
| Colour | Black (standard), other colours on request |
| ISPM 15 | Exempt (no treatment needed) |


## DELIVERY AND DOCUMENTATION

| | |
|---|---|
| Production location | Balk (NL) |
| Ordering in stacks | 15 pallets per stack (stack dimensions approx. 1,100 x 1,100 x 2,475 mm) |
| PPWR (EU 2025/40) | Declaration of conformity available |

1100 x 1100 mm · CONTAINER PALLET

# Plastic pallet 1100 x 1100 x 165 closed deck 3 runners heavy

## TECHNICAL DRAWING

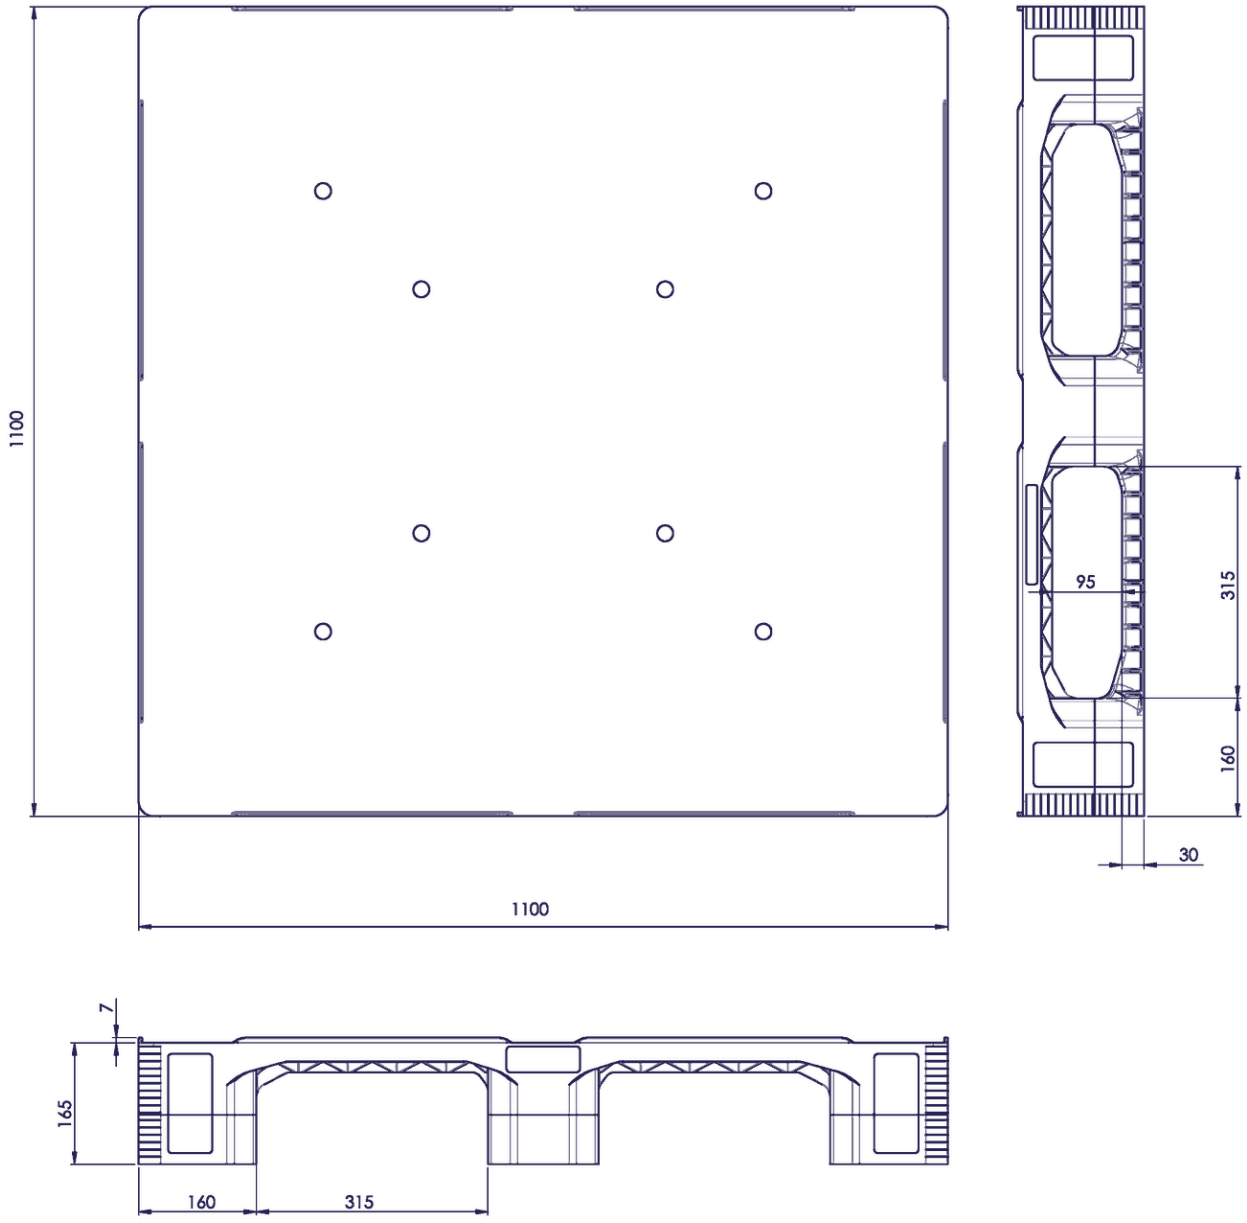


Top view and side views, dimensions in mm.

## TEST CONDITIONS AND TOLERANCES

- The racking load is determined in a test with 25 kg bags on a conventional pallet racking system.
- Dimensional tolerance of the pallet: +5 / -5 mm. Weight tolerance: +5 / -5 %.
- We test our pallets with an evenly distributed, stable and homogeneous load of bagged goods, for a predetermined period at an ambient temperature of 20 °C. Different load conditions may lead to different results and must be assessed separately.