Q-PALL PLASTIC PALLETS

Technical specifications
Datasheet, edition October 2026

1200 x 800 mm · EURO PALLET

# Plastic pallet 1200 x 800 x 145 open deck 3 runners medium

MEDIUM | Open deck | 3 runners

TOP



BOTTOM



| 5,000 kg | 1,250 kg | 450 kg |
|---|---|---|
| Static load<br>on a flat floor | Dynamic load<br>by forklift or pallet truck | Racking load<br>in pallet racking |

## DIMENSIONS AND WEIGHT

| | |
|---|---|
| Article number | 1.QP1208MB3RR |
| Length | 1200 mm |
| Width | 800 mm |
| Height | 145 mm |
| Weight | 11.4 kg |

## CONSTRUCTION AND MATERIAL

| | |
|---|---|
| Top deck | Open deck |
| Bottom | 3 runners |
| Load class | Medium |
| Nestable | No |
| Material | Mix HDPE / PP |
| Colour | Black (standard), other colours on request |
| ISPM 15 | Exempt (no treatment needed) |

## DELIVERY AND DOCUMENTATION

| | |
|---|---|
| Production location | Marktoberdorf (DE) |
| Ordering in stacks | 17 pallets per stack (stack dimensions approx. 1,200 x 800 x 2,465 mm) |
| PPWR (EU 2025/40) | Declaration of conformity available |

1200 x 800 mm · EURO PALLET


# Plastic pallet 1200 x 800 x 145 open deck 3 runners medium

## SIMILAR VERSIONS AND PRODUCTION LOCATIONS

| ARTICLE NUMBER | PRODUCTION LOCATION | DIMENSIONS (MM) | WEIGHT | STATIC | DYNAMIC | RACKING |
|---|---|---|---|---|---|---|
| 1.QP1208MB3RR This datasheet | Marktoberdorf (DE) | 1200 x 800 x 145 | 11.4 kg | 5,000 kg | 1,250 kg | 450 kg |
| 2.QP1208MB3RR | Ribe (DK) | 1200 x 800 x 145 | 12 kg | 5,000 kg | 1,250 kg | 450 kg |
| 3.QP1208MB3RR | Lleida (ES) | 1200 x 800 x 145 | 12 kg | 5,000 kg | 1,500 kg | 450 kg |
| 4.QP1208MB3RR | Balk (NL) | 1200 x 800 x 145 | 12 kg | 5,000 kg | 1,500 kg | 500 kg |
| 5.QP1208MB3RR | On request | 1200 x 800 x 145 | 12 kg | 5,000 kg | 1,500 kg | 450 kg |

Click an article number for the page and datasheet of that version. We deliver from the factory closest to you. Small differences in height, weight and load capacity between the versions are possible.

## TECHNICAL DRAWING

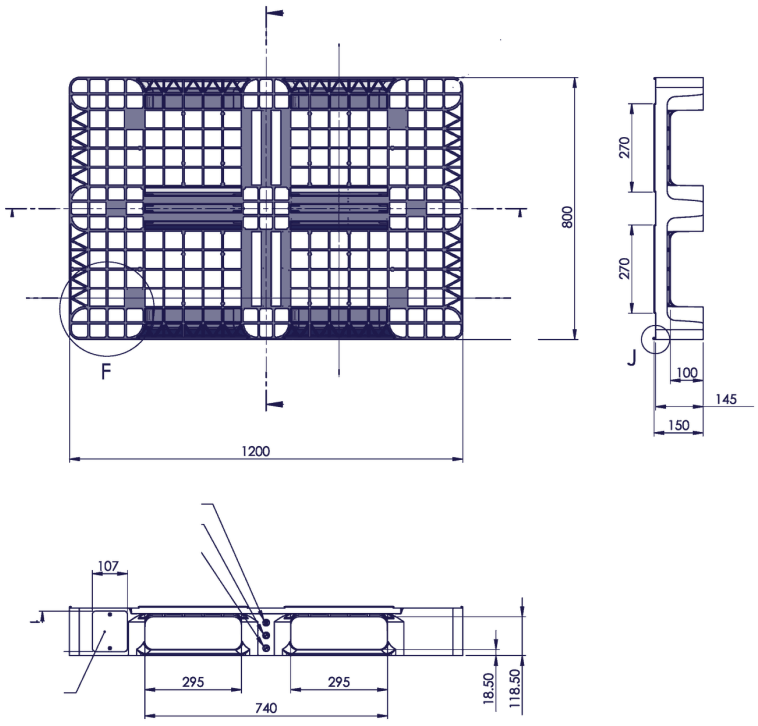


Top view and side views, dimensions in mm.

## TEST CONDITIONS AND TOLERANCES

- The racking load is determined in a test with 25 kg bags on a conventional pallet racking system.
- Dimensional tolerance of the pallet: +5 / -5 mm. Weight tolerance: +5 / -5 %.
- We test our pallets with an evenly distributed, stable and homogeneous load of bagged goods, for a predetermined period at an ambient temperature of 20 °C. Different load conditions may lead to different results and must be assessed separately.