Q-PALL PLASTIC PALLETS

**Technical specifications**
Datasheet, edition October 2026

1200 x 1000 mm · INDUSTRIAL PALLET


# Plastic pallet 1200 x 1000 x 160 open deck 5 runners heavy

HEAVY | Open deck | 5 runners

TOP



BOTTOM

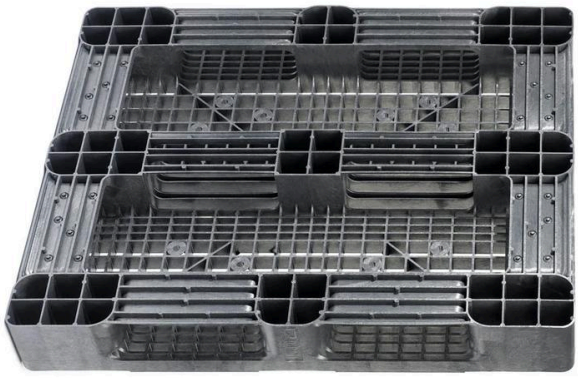

| 7,500 kg | 1,500 kg | 1,375 kg |
|---|---|---|
| Static load on a flat floor | Dynamic load by forklift or pallet truck | Racking load in pallet racking |

## DIMENSIONS AND WEIGHT

| | |
|---|---|
| Article number | 3.QP1210HB5RR |
| Length | 1200 mm |
| Width | 1000 mm |
| Height | 160 mm |
| Weight | 20.6 kg |

## CONSTRUCTION AND MATERIAL

| | |
|---|---|
| Top deck | Open deck |
| Bottom | 5 runners |
| Load class | Heavy |
| Nestable | No |
| Material | Mix HDPE / PP |
| Colour | Black (standard), other colours on request |
| ISPM 15 | Exempt (no treatment needed) |

## DELIVERY AND DOCUMENTATION

| | |
|---|---|
| Production location | On request |
| Ordering in stacks | 15 pallets per stack (stack dimensions approx. 1,200 x 1,000 x 2,400 mm) |
| PPWR (EU 2025/40) | Declaration of conformity available |

## SIMILAR VERSIONS AND PRODUCTION LOCATIONS


| ARTICLE NUMBER | PRODUCTION LOCATION | DIMENSIONS (MM) | WEIGHT | STATIC | DYNAMIC | RACKING |
|---|---|---|---|---|---|---|
| 3.QP1210HB5RR This datasheet | On request | 1200 x 1000 x 160 | 20.6 kg | 7,500 kg | 1,500 kg | 1,375 kg |
| 4.QP1210HB5RR | Balk (NL) | 1200 x 1000 x 160 | 20.3 kg | 7,500 kg | 1,500 kg | 1,375 kg |

Click an article number for the page and datasheet of that version. We deliver from the factory closest to you. Small differences in height, weight and load capacity between the versions are possible.

1200 x 1000 mm · INDUSTRIAL PALLET

# Plastic pallet 1200 x 1000 x 160 open deck 5 runners heavy

## TECHNICAL DRAWING

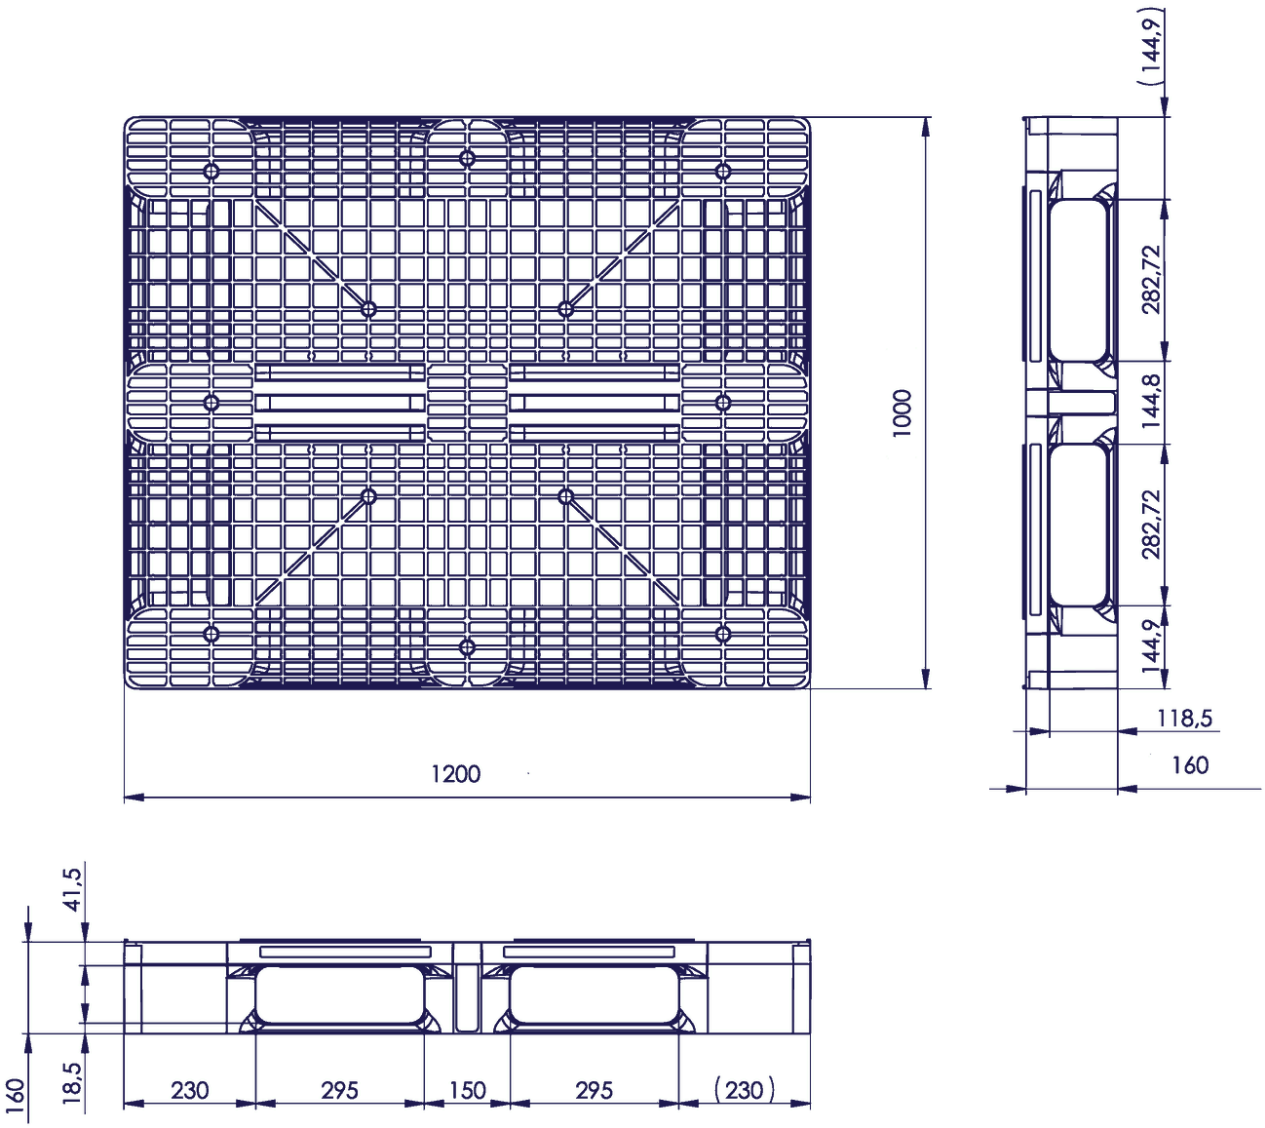


Top view and side views, dimensions in mm.

## TEST CONDITIONS AND TOLERANCES

- The racking load is determined in a test with 25 kg bags on a conventional pallet racking system.
- Dimensional tolerance of the pallet: +5 / -5 mm. Weight tolerance: +5 / -5 %.
- We test our pallets with an evenly distributed, stable and homogeneous load of bagged goods, for a predetermined period at an ambient temperature of 20 °C. Different load conditions may lead to different results and must be assessed separately.