Q-PALL PLASTIC PALLETS

Technical specifications
Datasheet, edition October 2026

1200 x 1000 mm · INDUSTRIAL PALLET

CP6 pallet 1200 x 1000 x 158 open deck 6 runners heavy

HEAVY | Open deck | 6 runners

TOP



BOTTOM



7,500 kg	2,000 kg	1,375 kg
Static load on a flat floor	Dynamic load by forklift or pallet truck	Racking load in pallet racking

DIMENSIONS AND WEIGHT

Article number	2.QP1210HB6RR-CP6
Length	1200 mm
Width	1000 mm
Height	158 mm
Weight	21.5 kg

CONSTRUCTION AND MATERIAL

Top deck	Open deck
Bottom	6 runners
Load class	Heavy
Nestable	No
Material	Recycled plastic (HDPE/PP)
Colour	Black (standard), other colours on request
ISPM 15	Exempt (no treatment needed)


DELIVERY AND DOCUMENTATION

Production location	Marktoberdorf (DE)
Ordering in stacks	15 pallets per stack (stack dimensions approx. 1,200 x 1,000 x 2,400 mm)

1200 x 1000 mm · INDUSTRIAL PALLET

CP6 pallet 1200 x 1000 x 158 open deck 6 runners heavy

TECHNICAL DRAWING

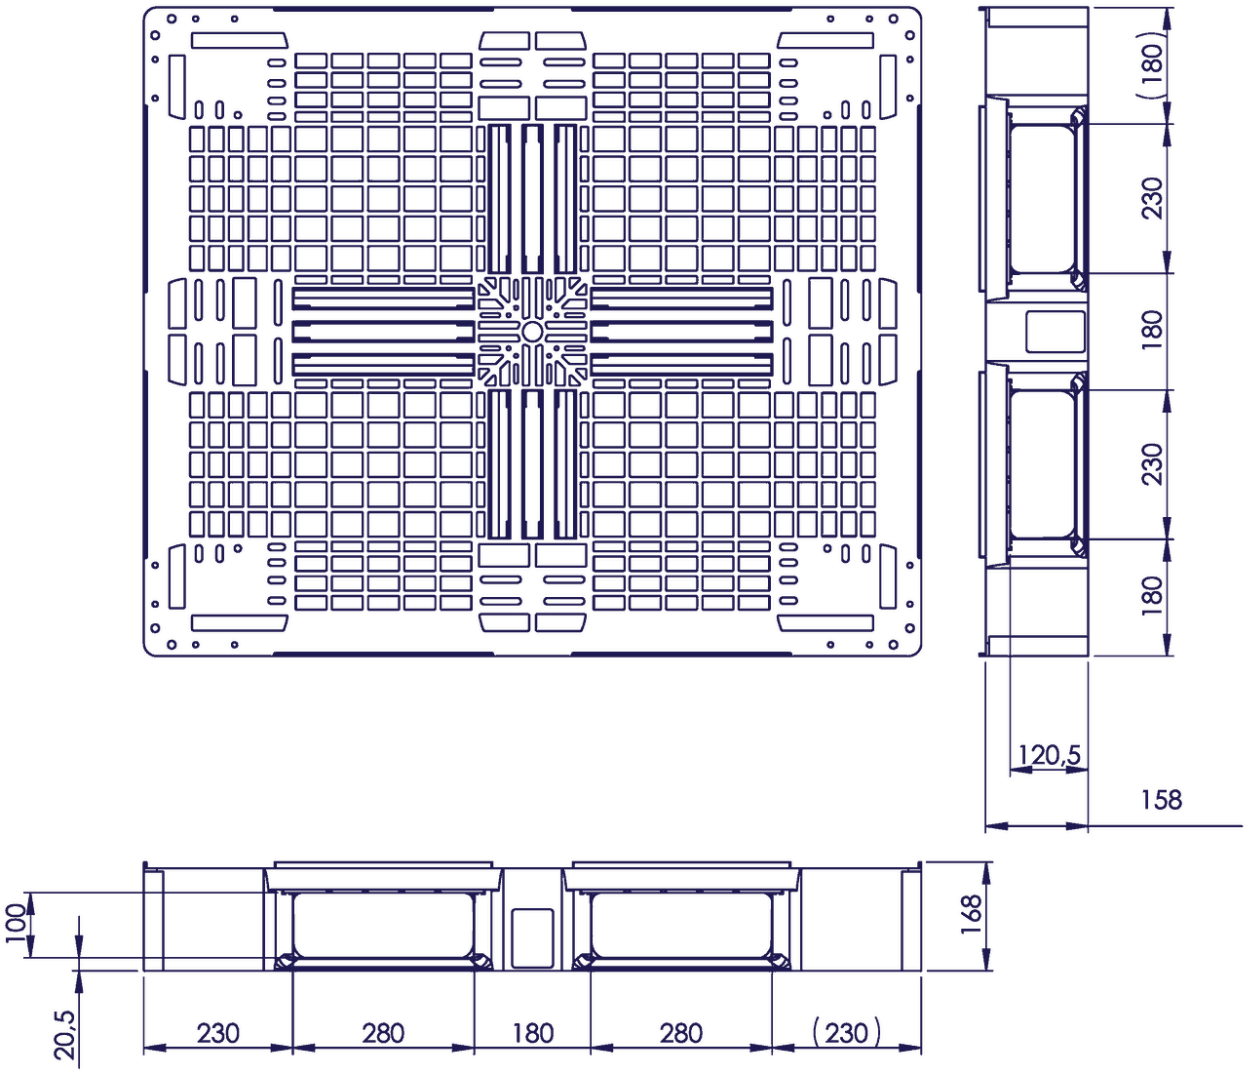

Top view and side views, dimensions in mm.

TEST CONDITIONS AND TOLERANCES

- The racking load is determined in a test with 25 kg bags on a conventional pallet racking system.
- Dimensional tolerance of the pallet: +5 / -5 mm. Weight tolerance: +5 / -5 %.
- We test our pallets with an evenly distributed, stable and homogeneous load of bagged goods, for a predetermined period at an ambient temperature of 20 °C. Different load conditions may lead to different results and must be assessed separately.