Q-PALL PLASTIC PALLETS

Technical specifications
Datasheet, edition October 2026

1200 x 1000 mm · INDUSTRIAL PALLET

Plastic pallet 1200 x 1000 x 150 closed deck 9 feet light

LIGHT | Closed deck | 9 feet | Nestable

TOP



BOTTOM



2,500 kg	1,000 kg	–
Static load on a flat floor	Dynamic load by forklift or pallet truck	Racking load Not for racking

DIMENSIONS AND WEIGHT

Article number	2.QP1210LB9FR-CD
Length	1200 mm
Width	1000 mm
Height	150 mm
Weight	8.9 kg

CONSTRUCTION AND MATERIAL

Top deck	Closed deck
Bottom	9 feet
Load class	Light
Nestable	Yes
Material	Mix HDPE / PP / LDPE
Colour	Black (standard), other colours on request
ISPM 15	Exempt (no treatment needed)

DELIVERY AND DOCUMENTATION

Production location	Balk (NL)
Ordering in stacks	45 pallets per stack (stack dimensions approx. 1,200 x 1,000 x 2,360 mm)
PPWR (EU 2025/40)	Declaration of conformity available

SIMILAR VERSIONS AND PRODUCTION LOCATIONS

ARTICLE NUMBER	PRODUCTION LOCATION	DIMENSIONS (MM)	WEIGHT	STATIC	DYNAMIC	RACKING
2.QP1210LB9FR-CD This datasheet	Balk (NL)	1200 x 1000 x 150	8.9 kg	2,500 kg	1,000 kg	–
1.QP1210LB9FR-CD	Lleida (ES)	1200 x 1000 x 150	8.9 kg	2,500 kg	1,000 kg	–


Click an article number for the page and datasheet of that version. We deliver from the factory closest to you. Small differences in height, weight and load capacity between the versions are possible.

Q-PALL BV • Edisonweg 9, 5466 AR Veghel, the Netherlands • +31 (0)413 353 111 • info@qpall.com
https://qpall.com/en/plastic-pallets/1200-x-1000-mm/plastic-pallet-1200-x-1000-x-150-closed-deck-9-feet-light/
Subject to change. Prices and lead times on request.

1200 x 1000 mm · INDUSTRIAL PALLET

Plastic pallet 1200 x 1000 x 150 closed deck 9 feet light

TECHNICAL DRAWING

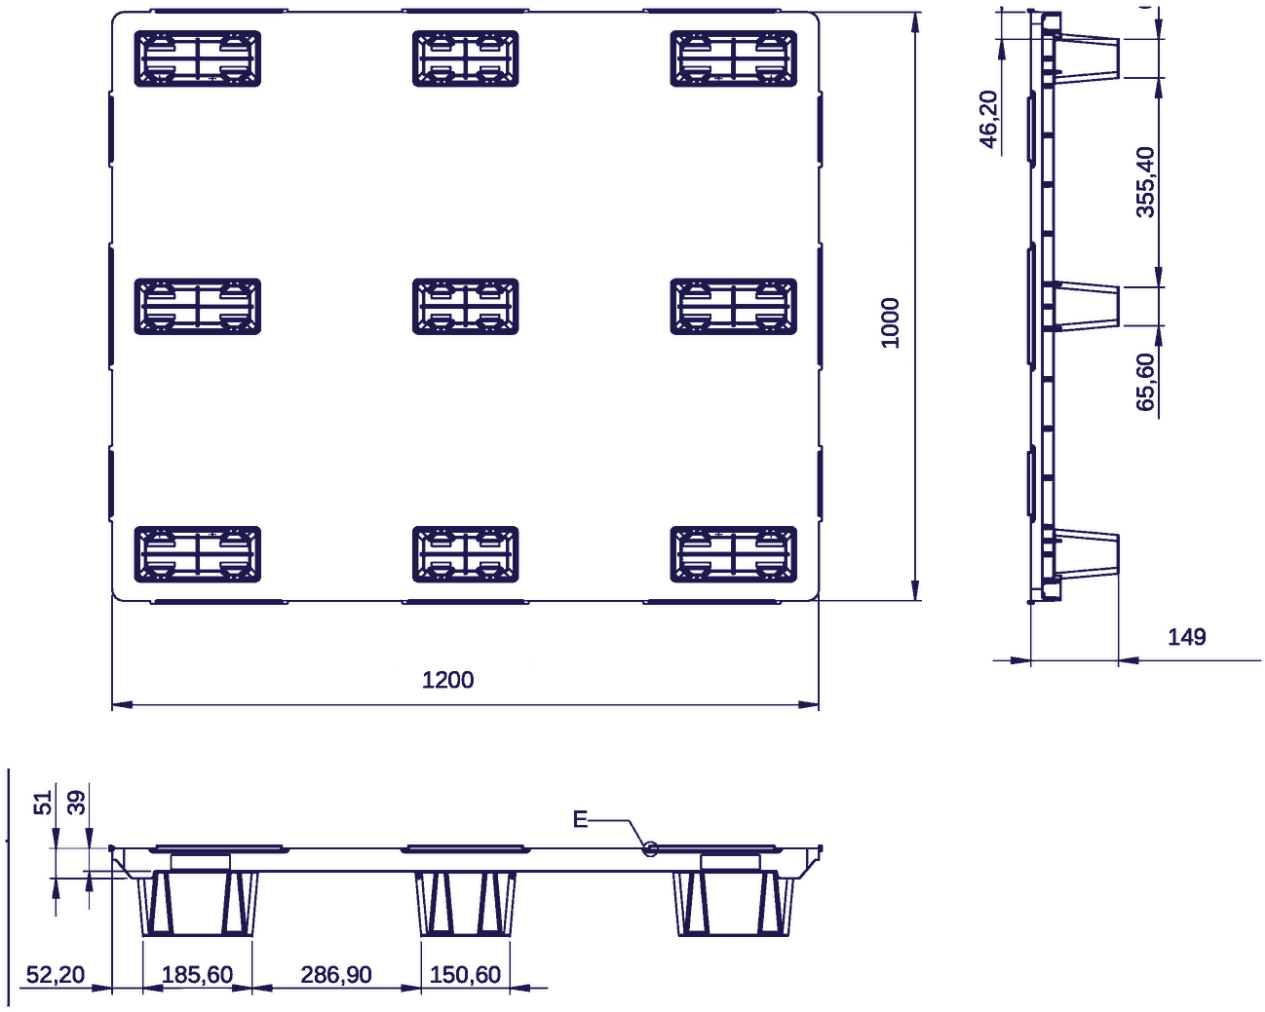

Top view and side views, dimensions in mm.

TEST CONDITIONS AND TOLERANCES

- Dimensional tolerance of the pallet: +5 / -5 mm. Weight tolerance: +5 / -5 %.
- We test our pallets with an evenly distributed, stable and homogeneous load of bagged goods, for a predetermined period at an ambient temperature of 20 °C. Different load conditions may lead to different results and must be assessed separately.