Q-PALL PLASTIC PALLETS


Technical specifications
Datasheet, edition October 2026

1200 x 800 mm · EURO PALLET

Hygienic pallet 1200 x 800 x 160 closed deck 3 runners heavy, racking 1,000 kg

HEAVY | Closed deck | 3 runners

TOP

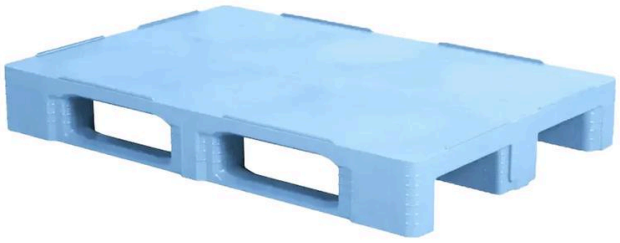

BOTTOM



7,500 kg	1,500 kg	1,000 kg
Static load on a flat floor	Dynamic load by forklift or pallet truck	Racking load in pallet racking

DIMENSIONS AND WEIGHT

Article number	QPH1208HP3RR-CDB
Length	1200 mm
Width	800 mm
Height	160 mm
Weight	18 kg

CONSTRUCTION AND MATERIAL

Top deck	Closed deck
Bottom	3 runners
Load class	Heavy
Nestable	No
Material	Virgin plastic
Colour	Blue
ISPM 15	Exempt (no treatment needed)

DELIVERY AND DOCUMENTATION

Production location	On request
Ordering in stacks	15 pallets per stack (stack dimensions approx. 1,200 x 800 x 2,385 mm)

SIMILAR VERSIONS AND PRODUCTION LOCATIONS


ARTICLE NUMBER	COLOUR	PRODUCTION LOCATION	DIMENSIONS (MM)	WEIGHT	STATIC	DYNAMIC	RACKING
QPH1208HP3RR-CDB This datasheet	Blue	On request	1200 x 800 x 160	18 kg	7,500 kg	1,500 kg	1,000 kg
QPH1208HP3RR-CDG	Grey	On request	1200 x 800 x 160	18 kg	7,500 kg	1,500 kg	1,000 kg
QPH1208HR3RR-ECO	Black	On request	1200 x 800 x 160	18 kg	7,500 kg	1,500 kg	1,000 kg

Click an article number for the page and datasheet of that version. We deliver from the factory closest to you. Small differences in height, weight and load capacity between the versions are possible.

1200 x 800 mm · EURO PALLET

Hygienic pallet 1200 x 800 x 160 closed deck 3 runners heavy, racking 1,000 kg

TECHNICAL DRAWING

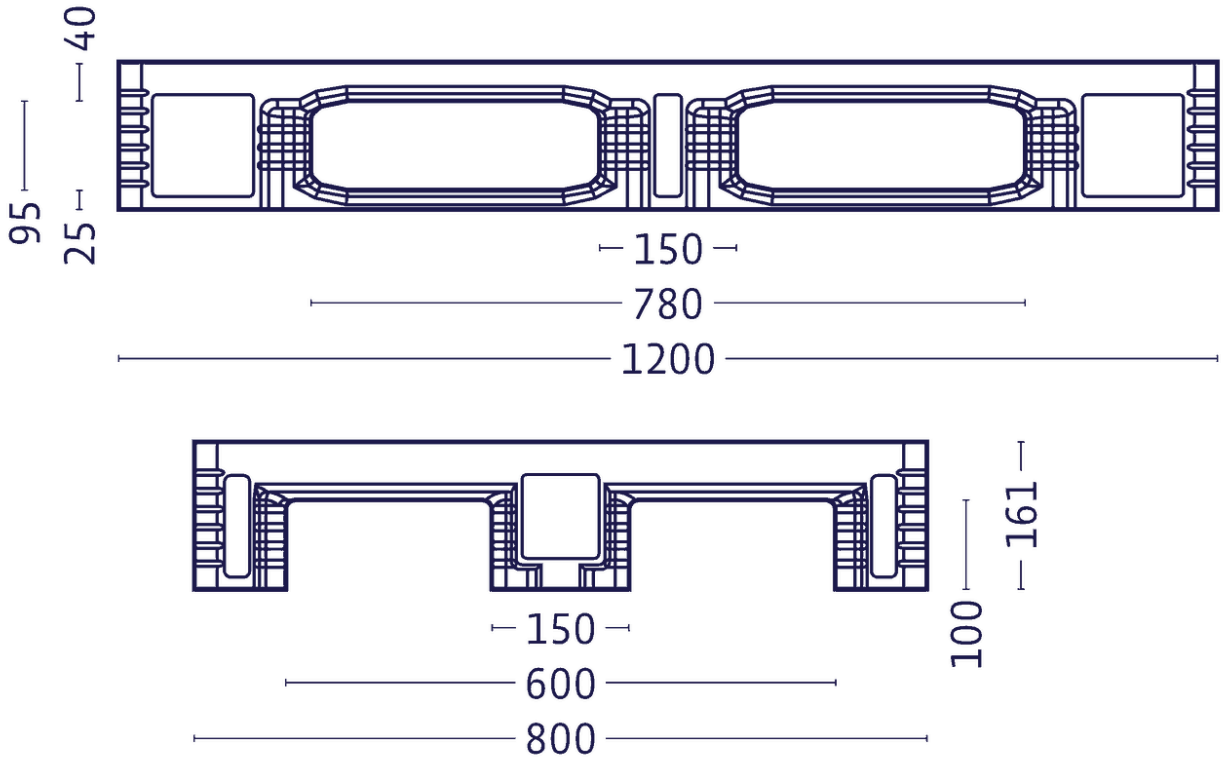

Side views, dimensions in mm.

TEST CONDITIONS AND TOLERANCES

- The racking load is determined in a test with 25 kg bags on a conventional pallet racking system.
- Dimensional tolerance of the pallet: +5 / -5 mm. Weight tolerance: +5 / -5 %.
- We test our pallets with an evenly distributed, stable and homogeneous load of bagged goods, for a predetermined period at an ambient temperature of 20 °C. Different load conditions may lead to different results and must be assessed separately.