

[illegible]

cc_glasses

File: ir_glasses.kicad_sch

Size: A3	Date: 2026-09-07	Rev: EVT E2
----------	------------------	-------------

Size: A3	Date: 2020-09-07	REV: EVI 12
KiCad E.D.A. 10.0.6		Id: 1/5

RFC89 L.D.A.: 10.10.0		10. 17.0
	7	8

[illegible]

20 mA/ch; one LED at a time. BLANK pulled high during reset.

TIA: PD cathode at virtual ground, anode at AGND; output rises with light.

U1: TLC59283RGER

FB1: 600R@100MHz 500mA

NT1: AGND-GND star

D17: PES05V0518A.115

R1: 2.67k

R2: 10k

R3: 10k

R10: 10k

R11: 100

R12: 100

R13: 47

PWR_FLAG #FC001

PWR_FLAG #FC002

PWR_FLAG #FC003

PWR_FLAG #FC004

LED_LAT

LED_K1

LED_K2

LED_K3

LED_K4

LED_K5

LED_K6

LED_K7

LED_K8

LED_K9

LED_K10

LED_K11

LED_K12

OUT0

OUT1

OUT2

OUT3

OUT4

OUT5

OUT6

OUT7

OUT8

OUT9

OUT10

OUT11

OUT12

OUT13

OUT14

OUT15

BLANK

SOUT

IREF

VCC

GND

SIN

LED_SIN

SCLK

LED_SCLK

EP

VREF_DIV

VREF_BUF

VREF_1V05

MUX_L

MUX_R

ADC_L

ADC_R

LED_BLANK

3V3

AGND

GND

600R@100MHz 500mA

1

2

3

4

5

















6

7

8


Rev: EVT E2

Id: 2/5

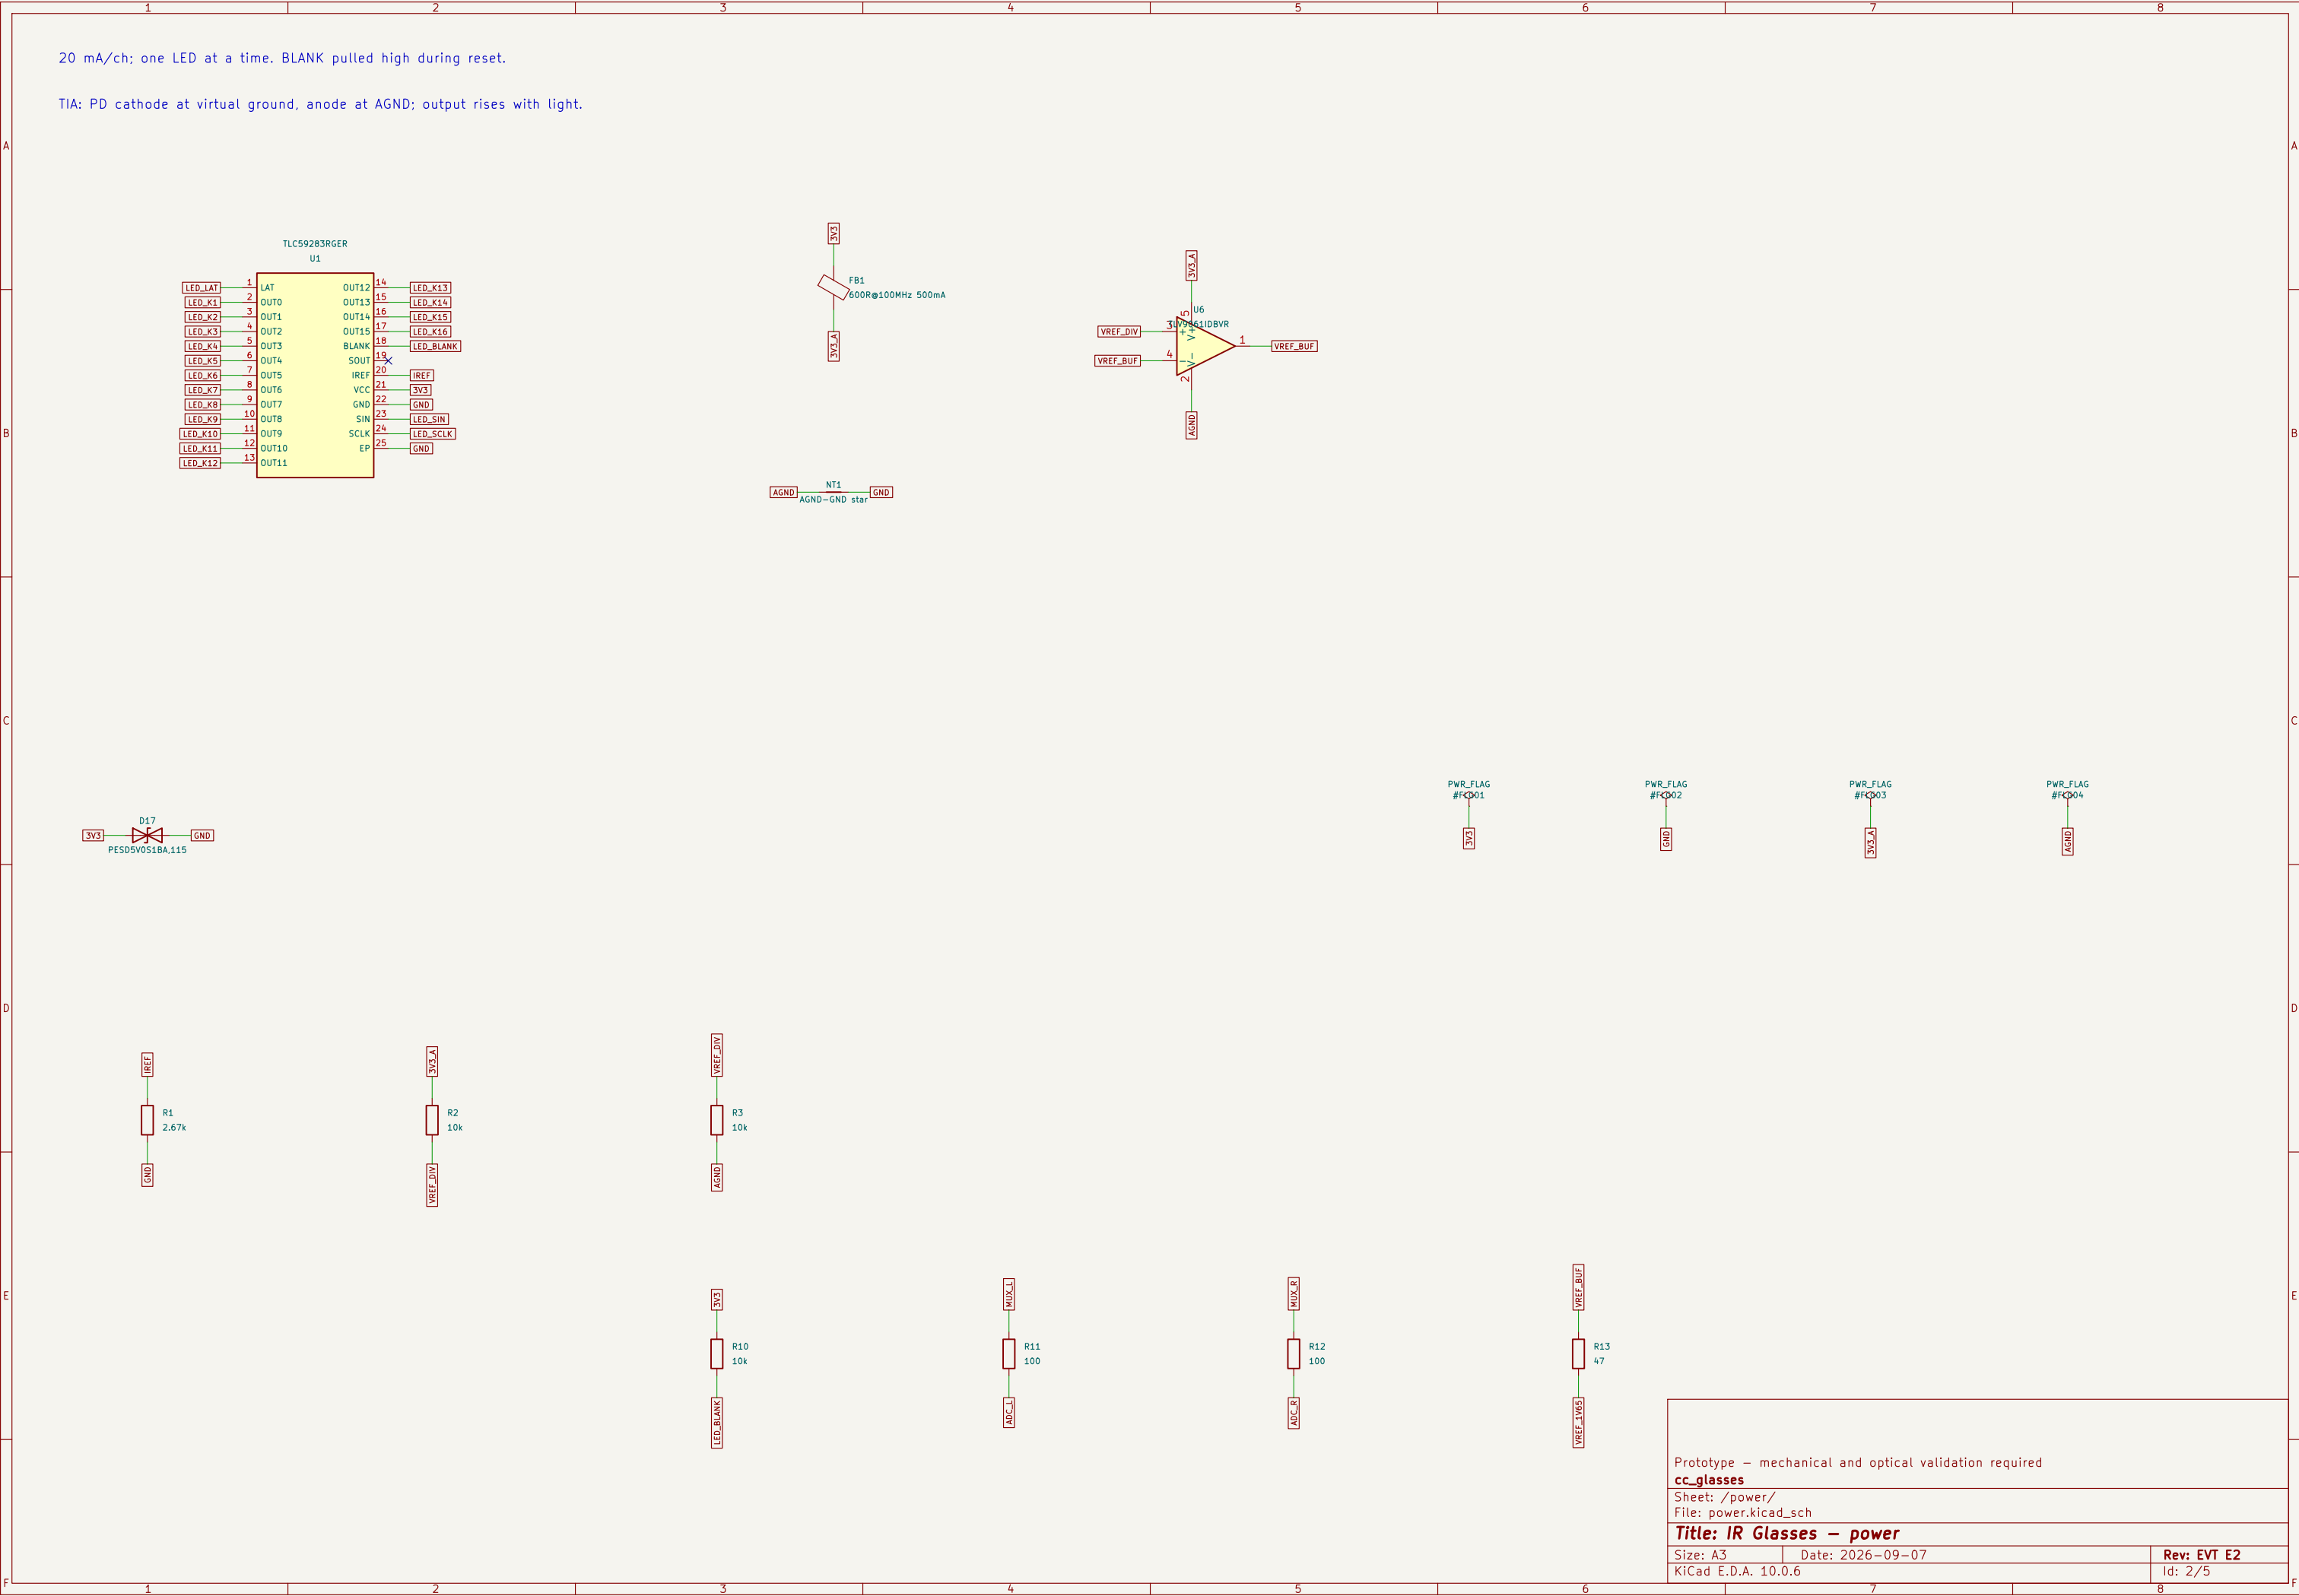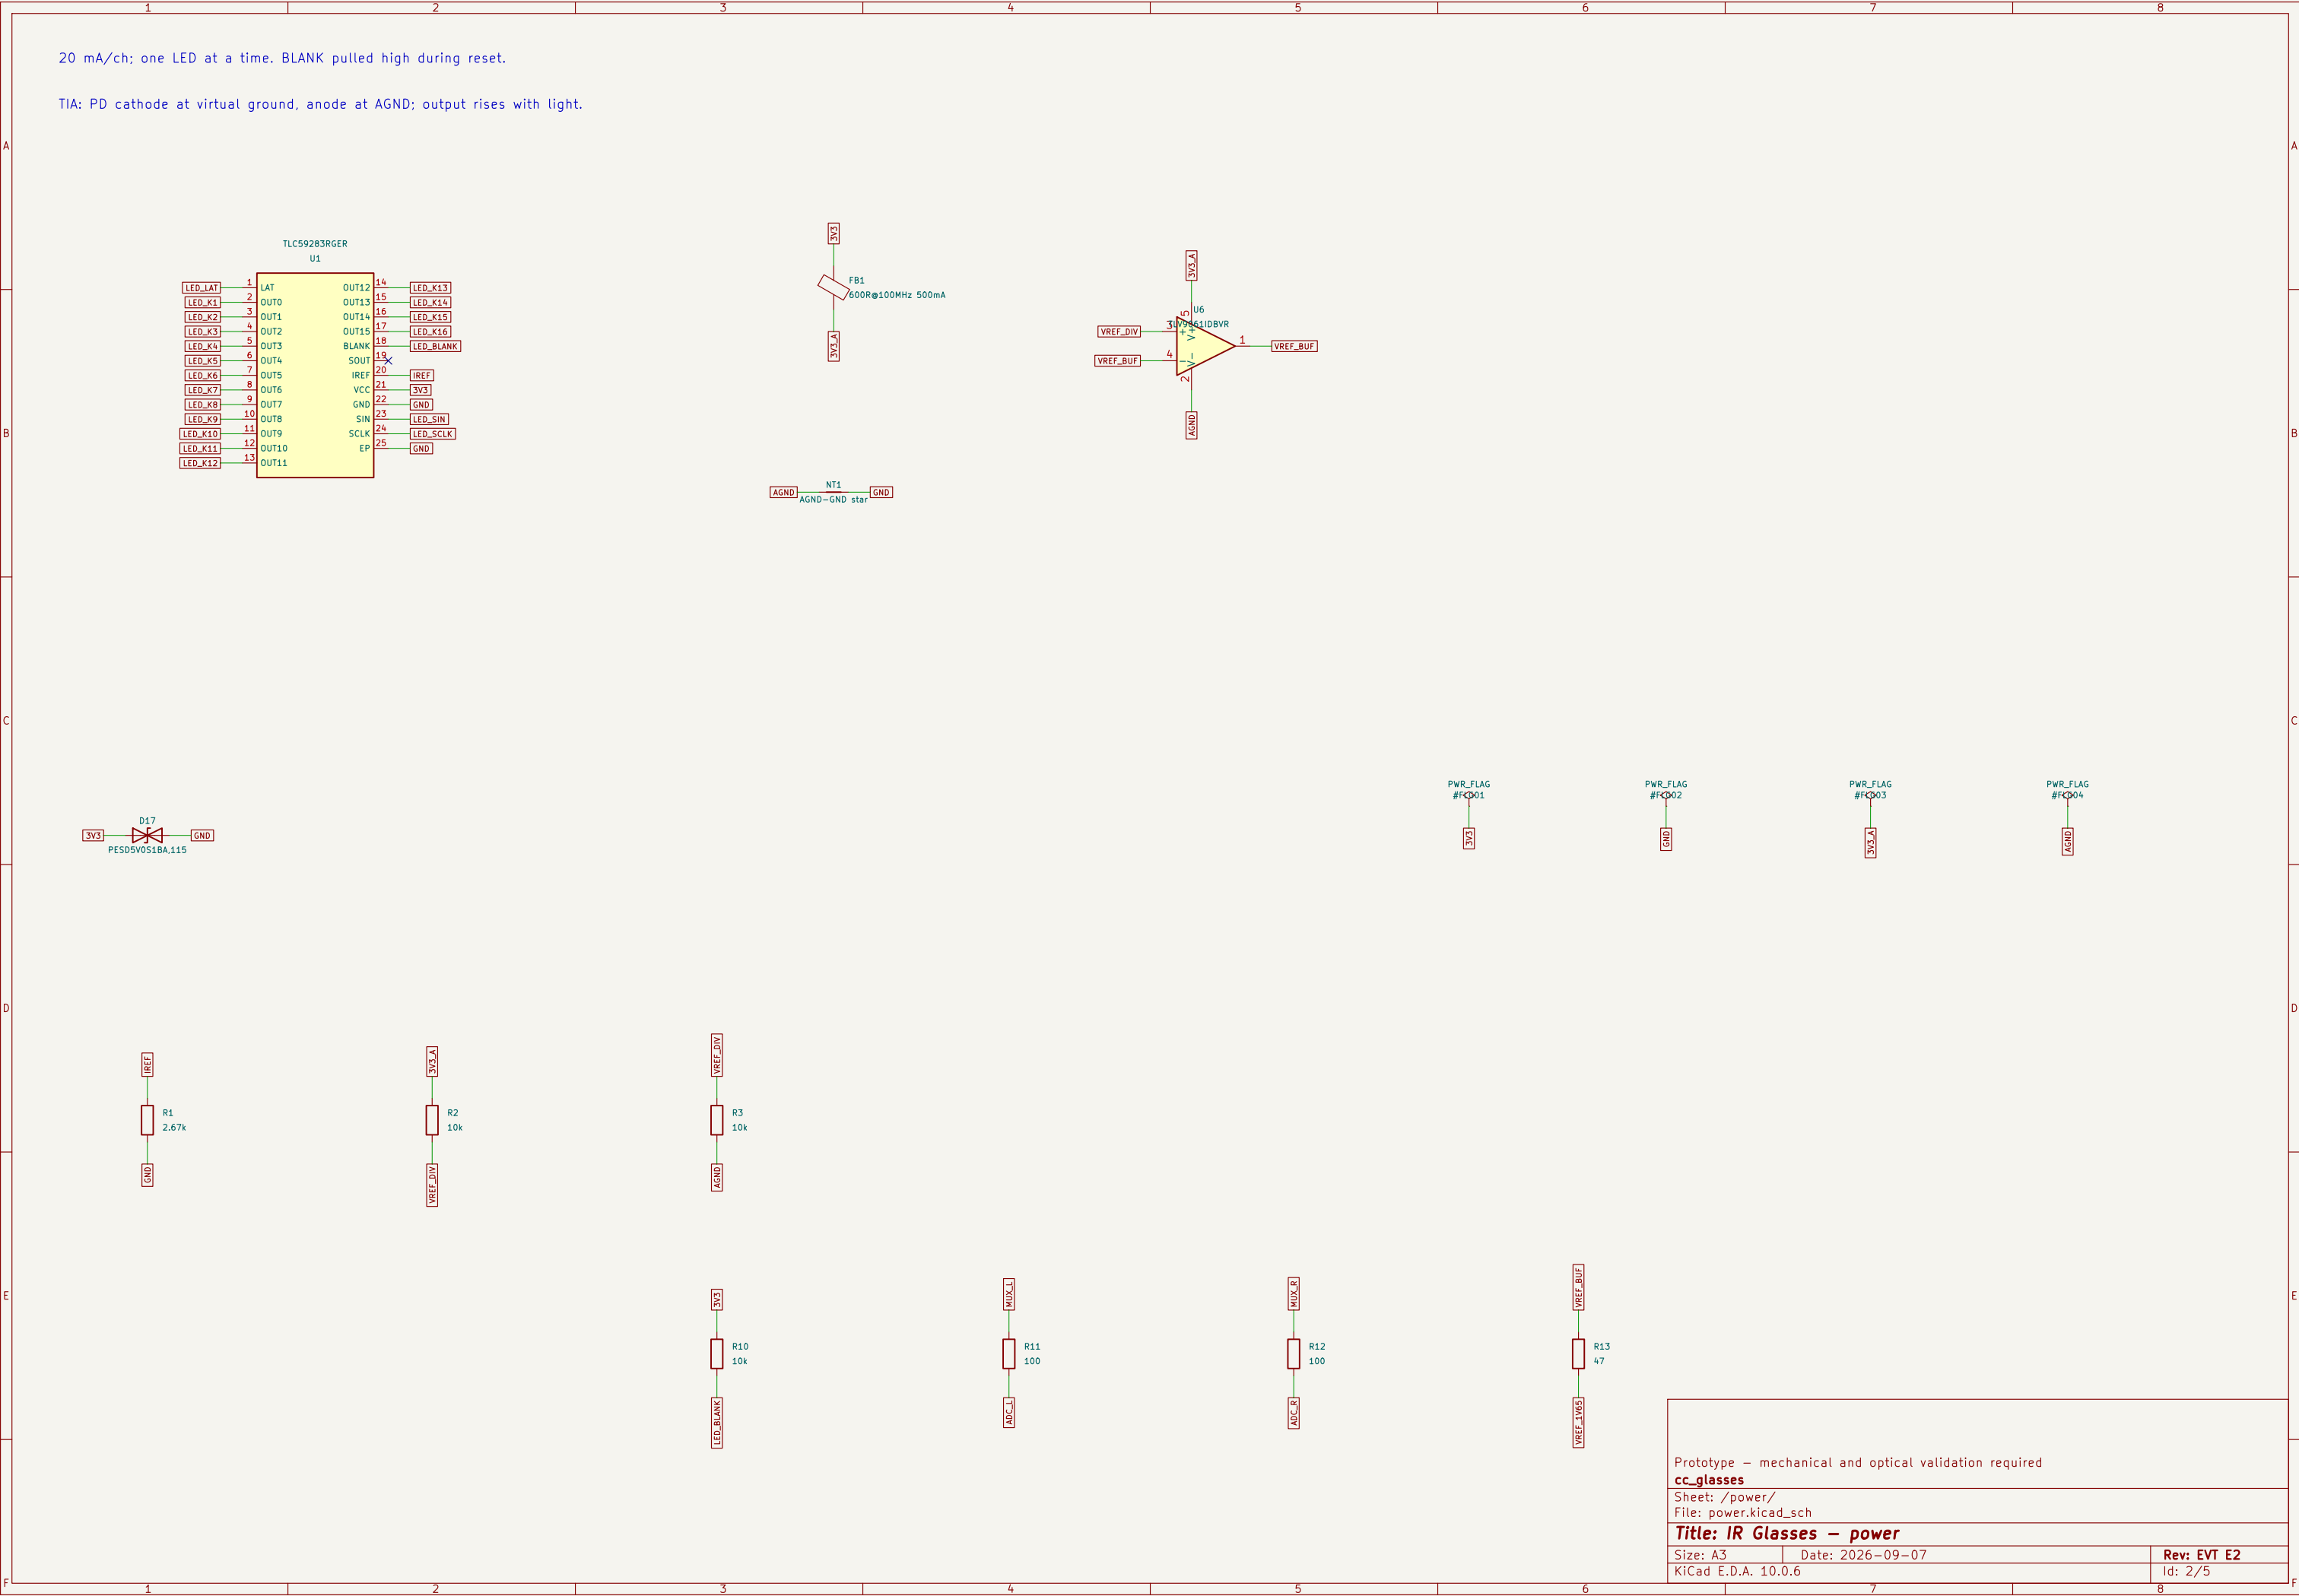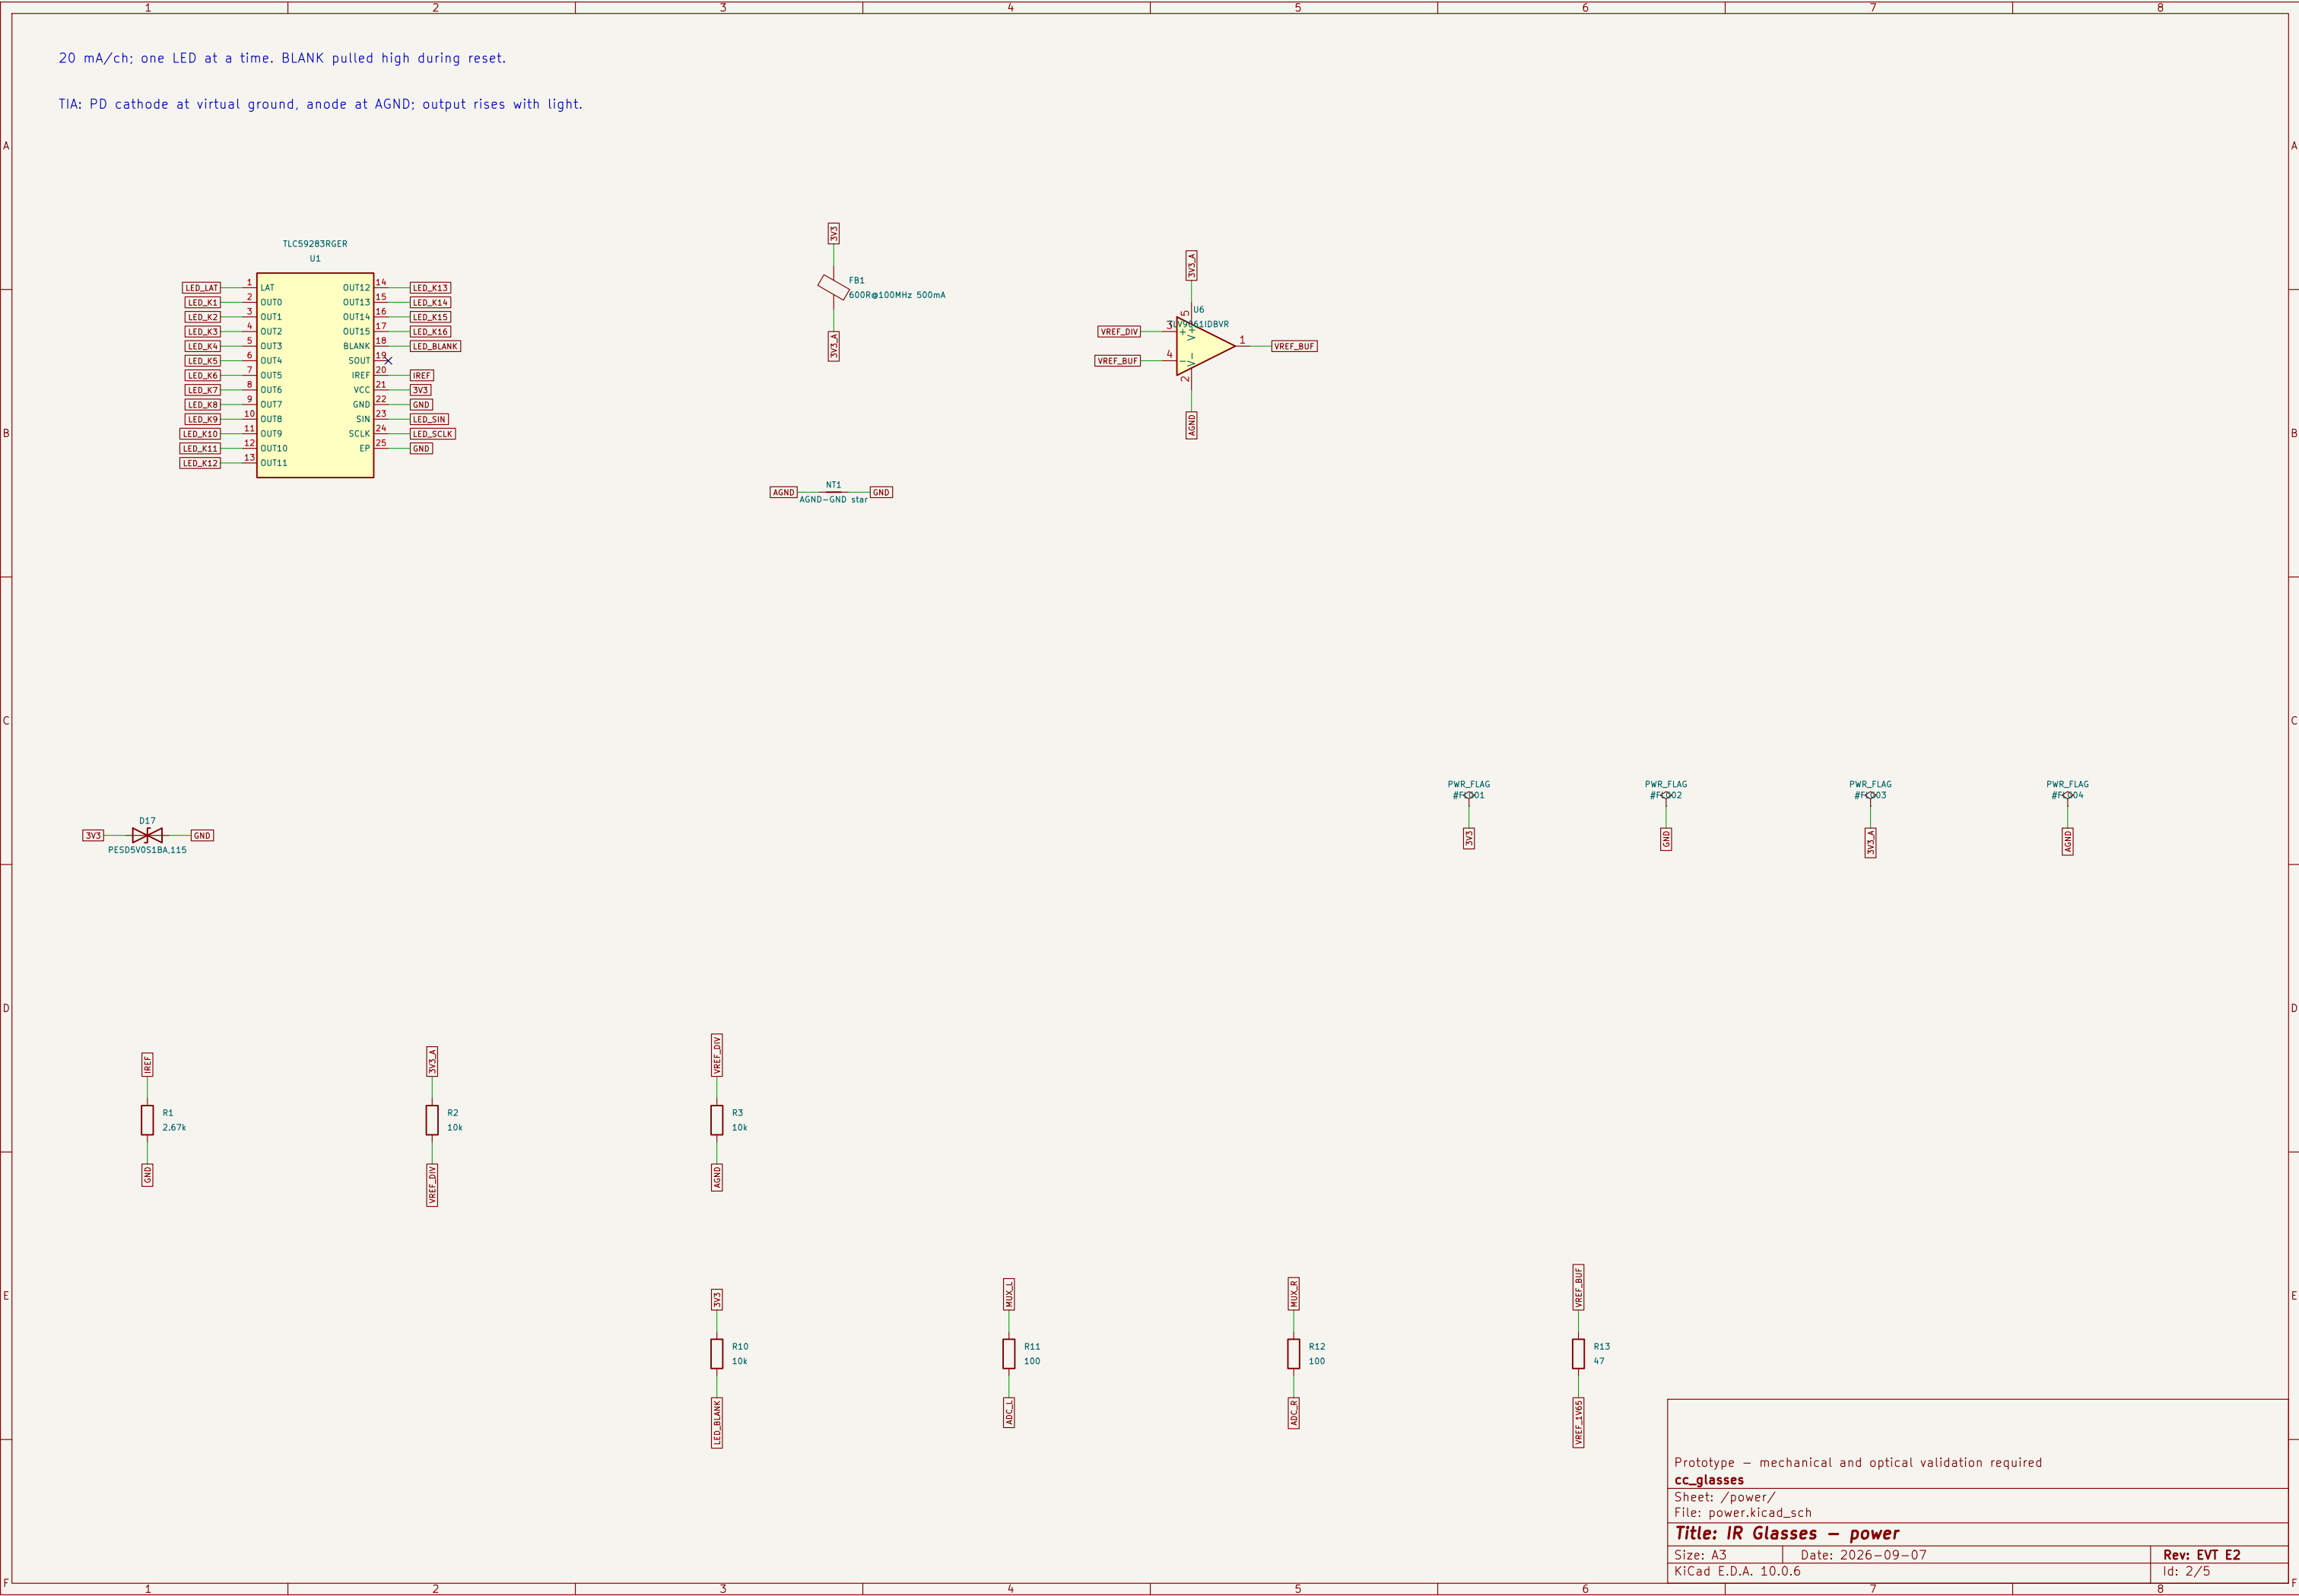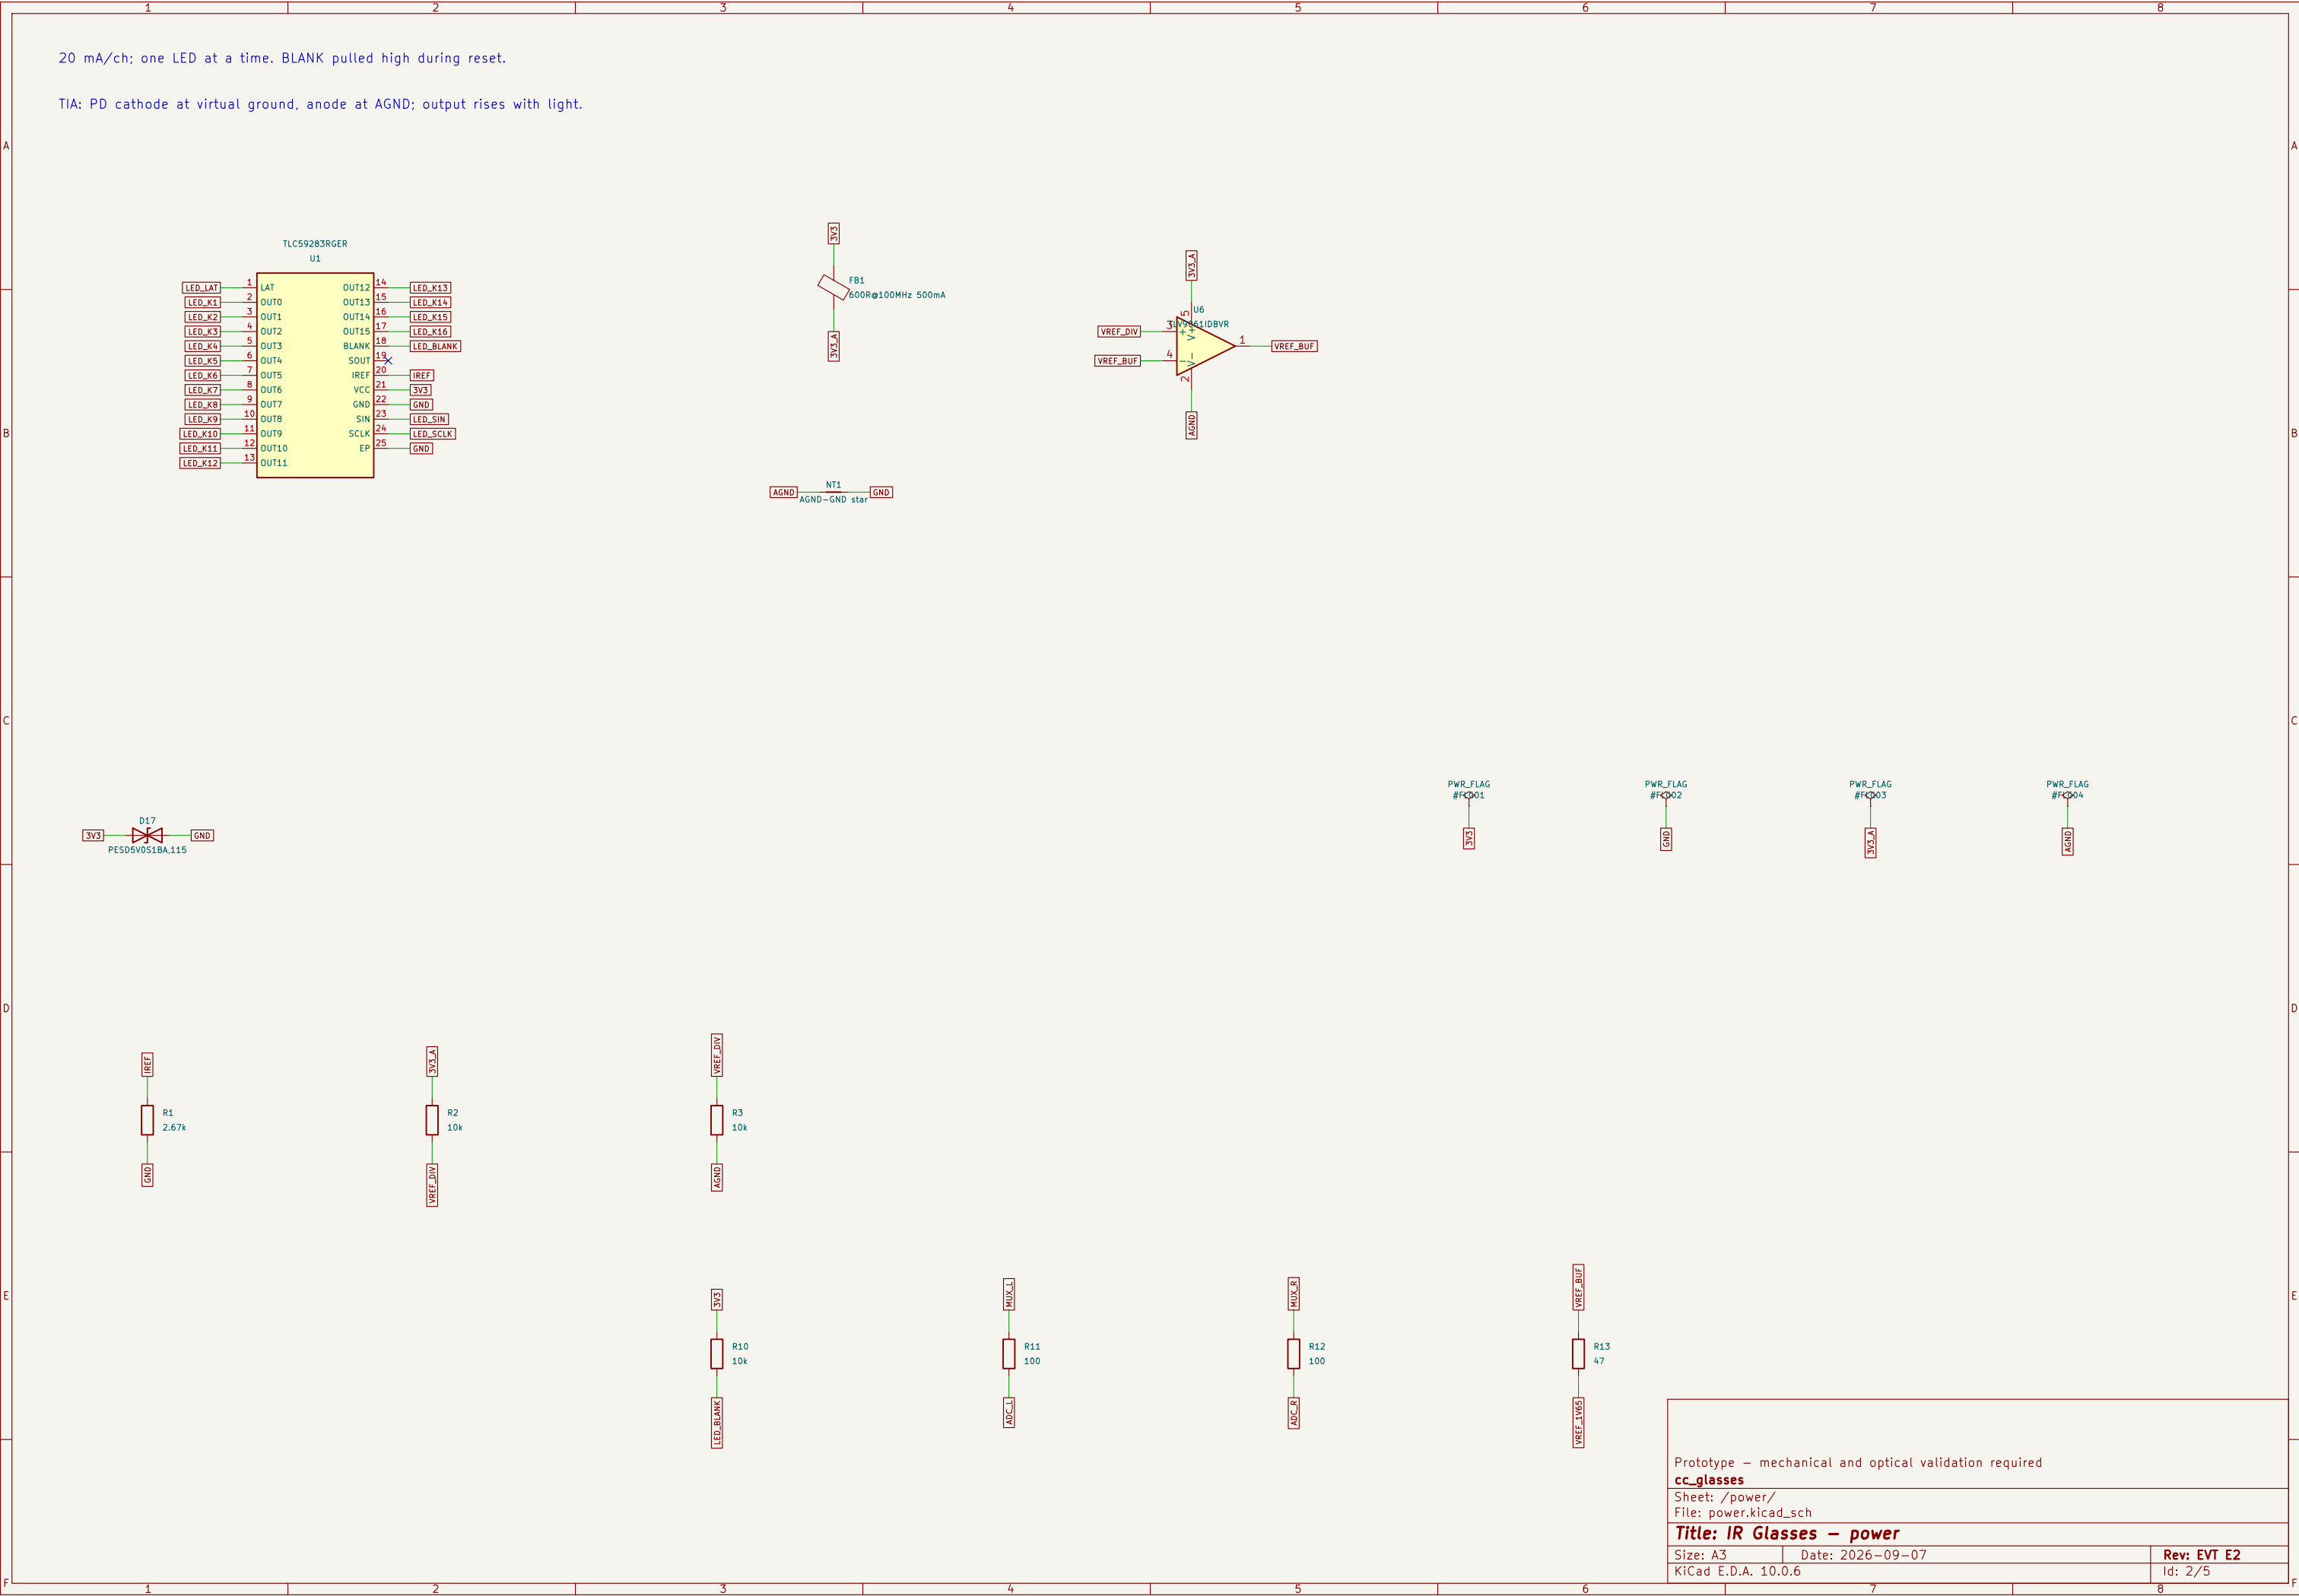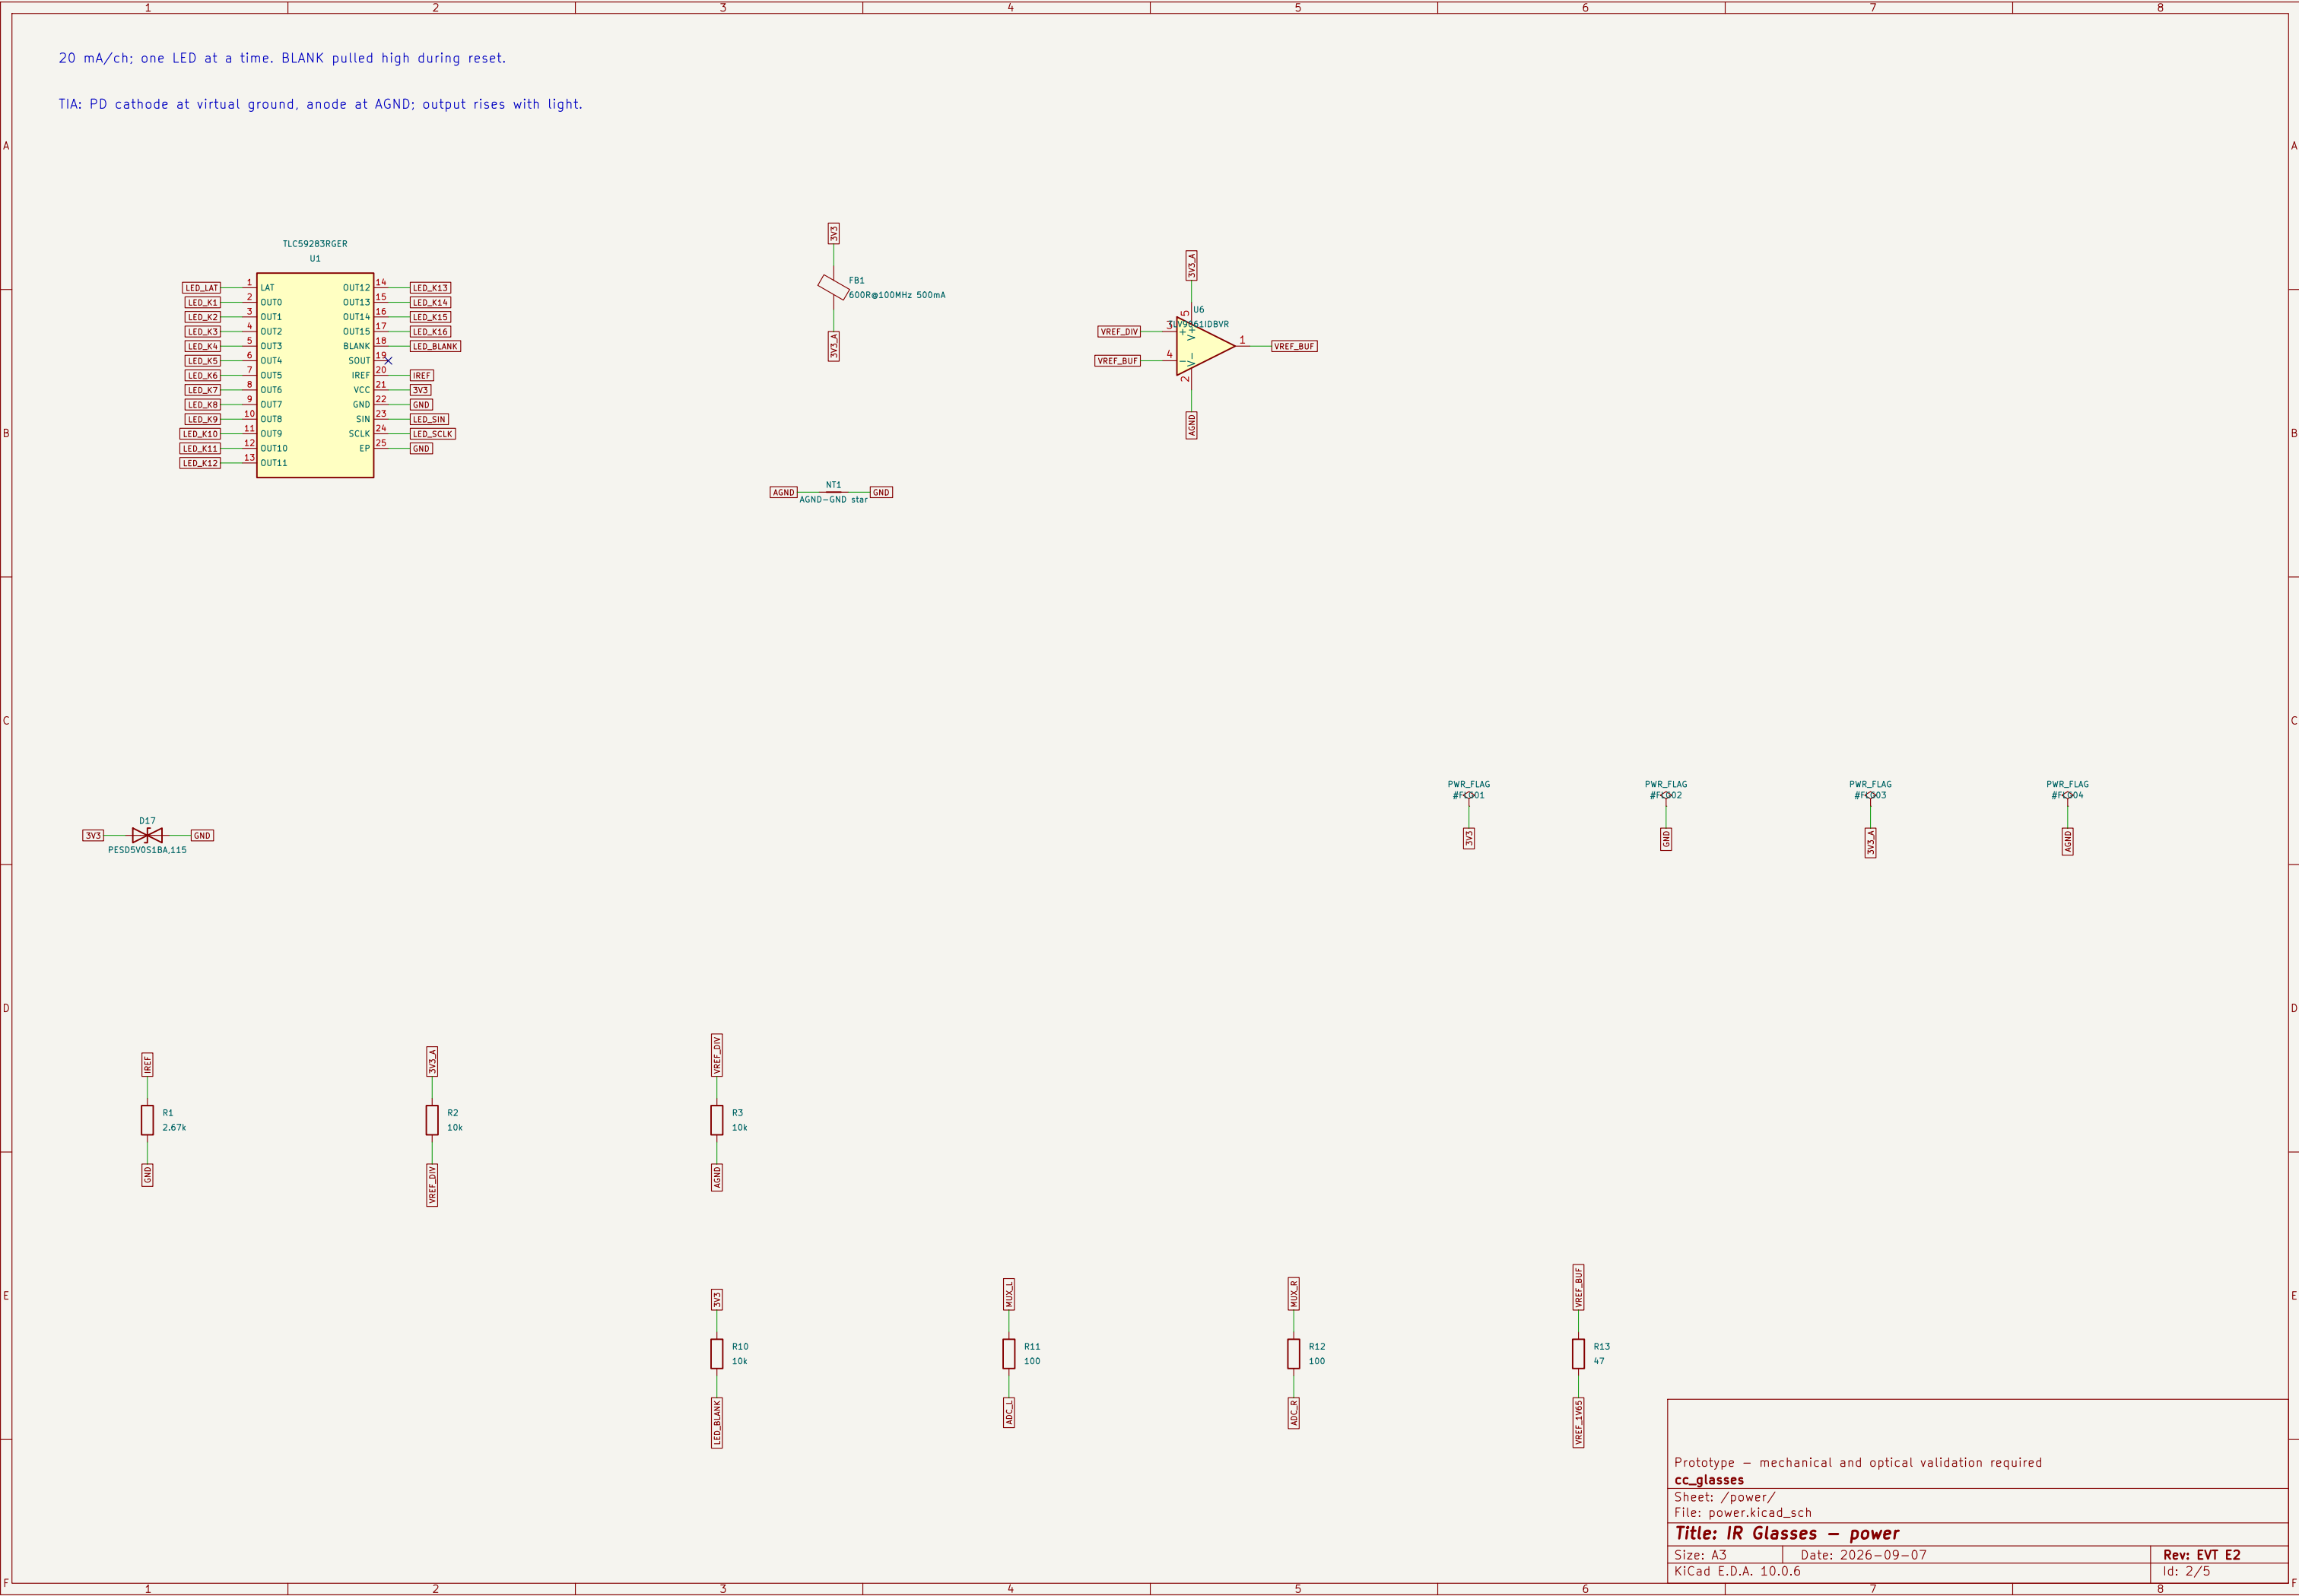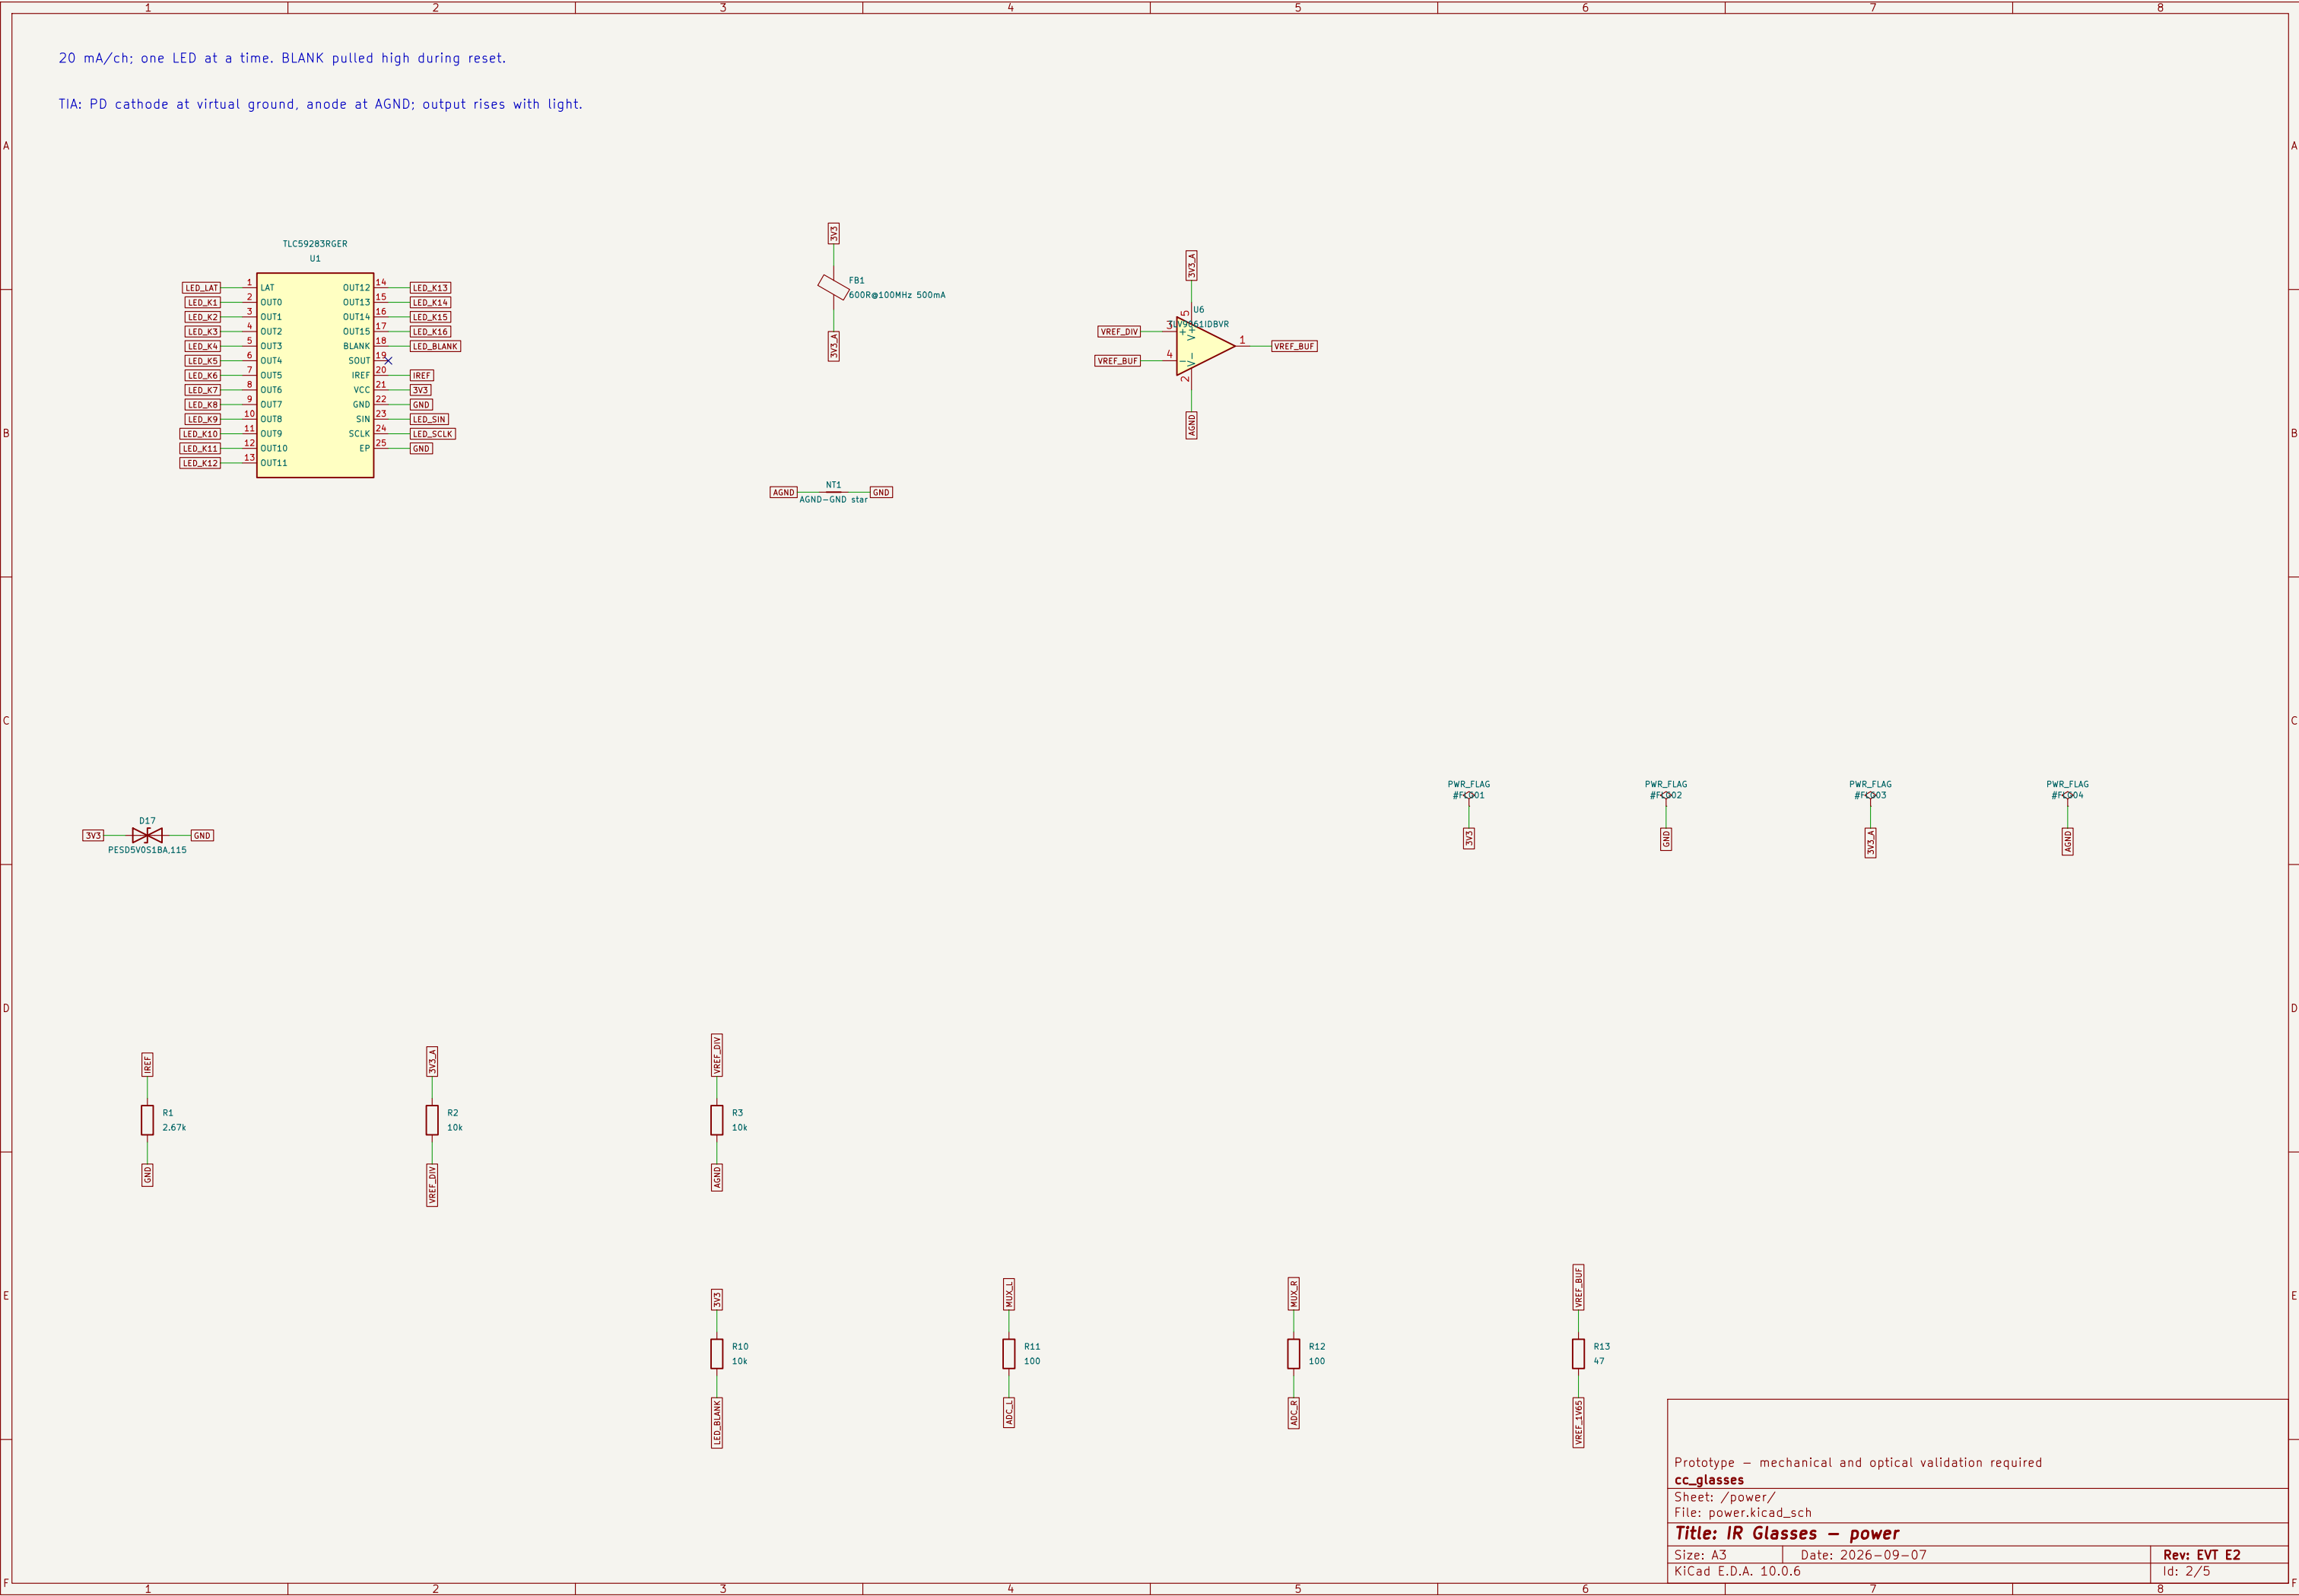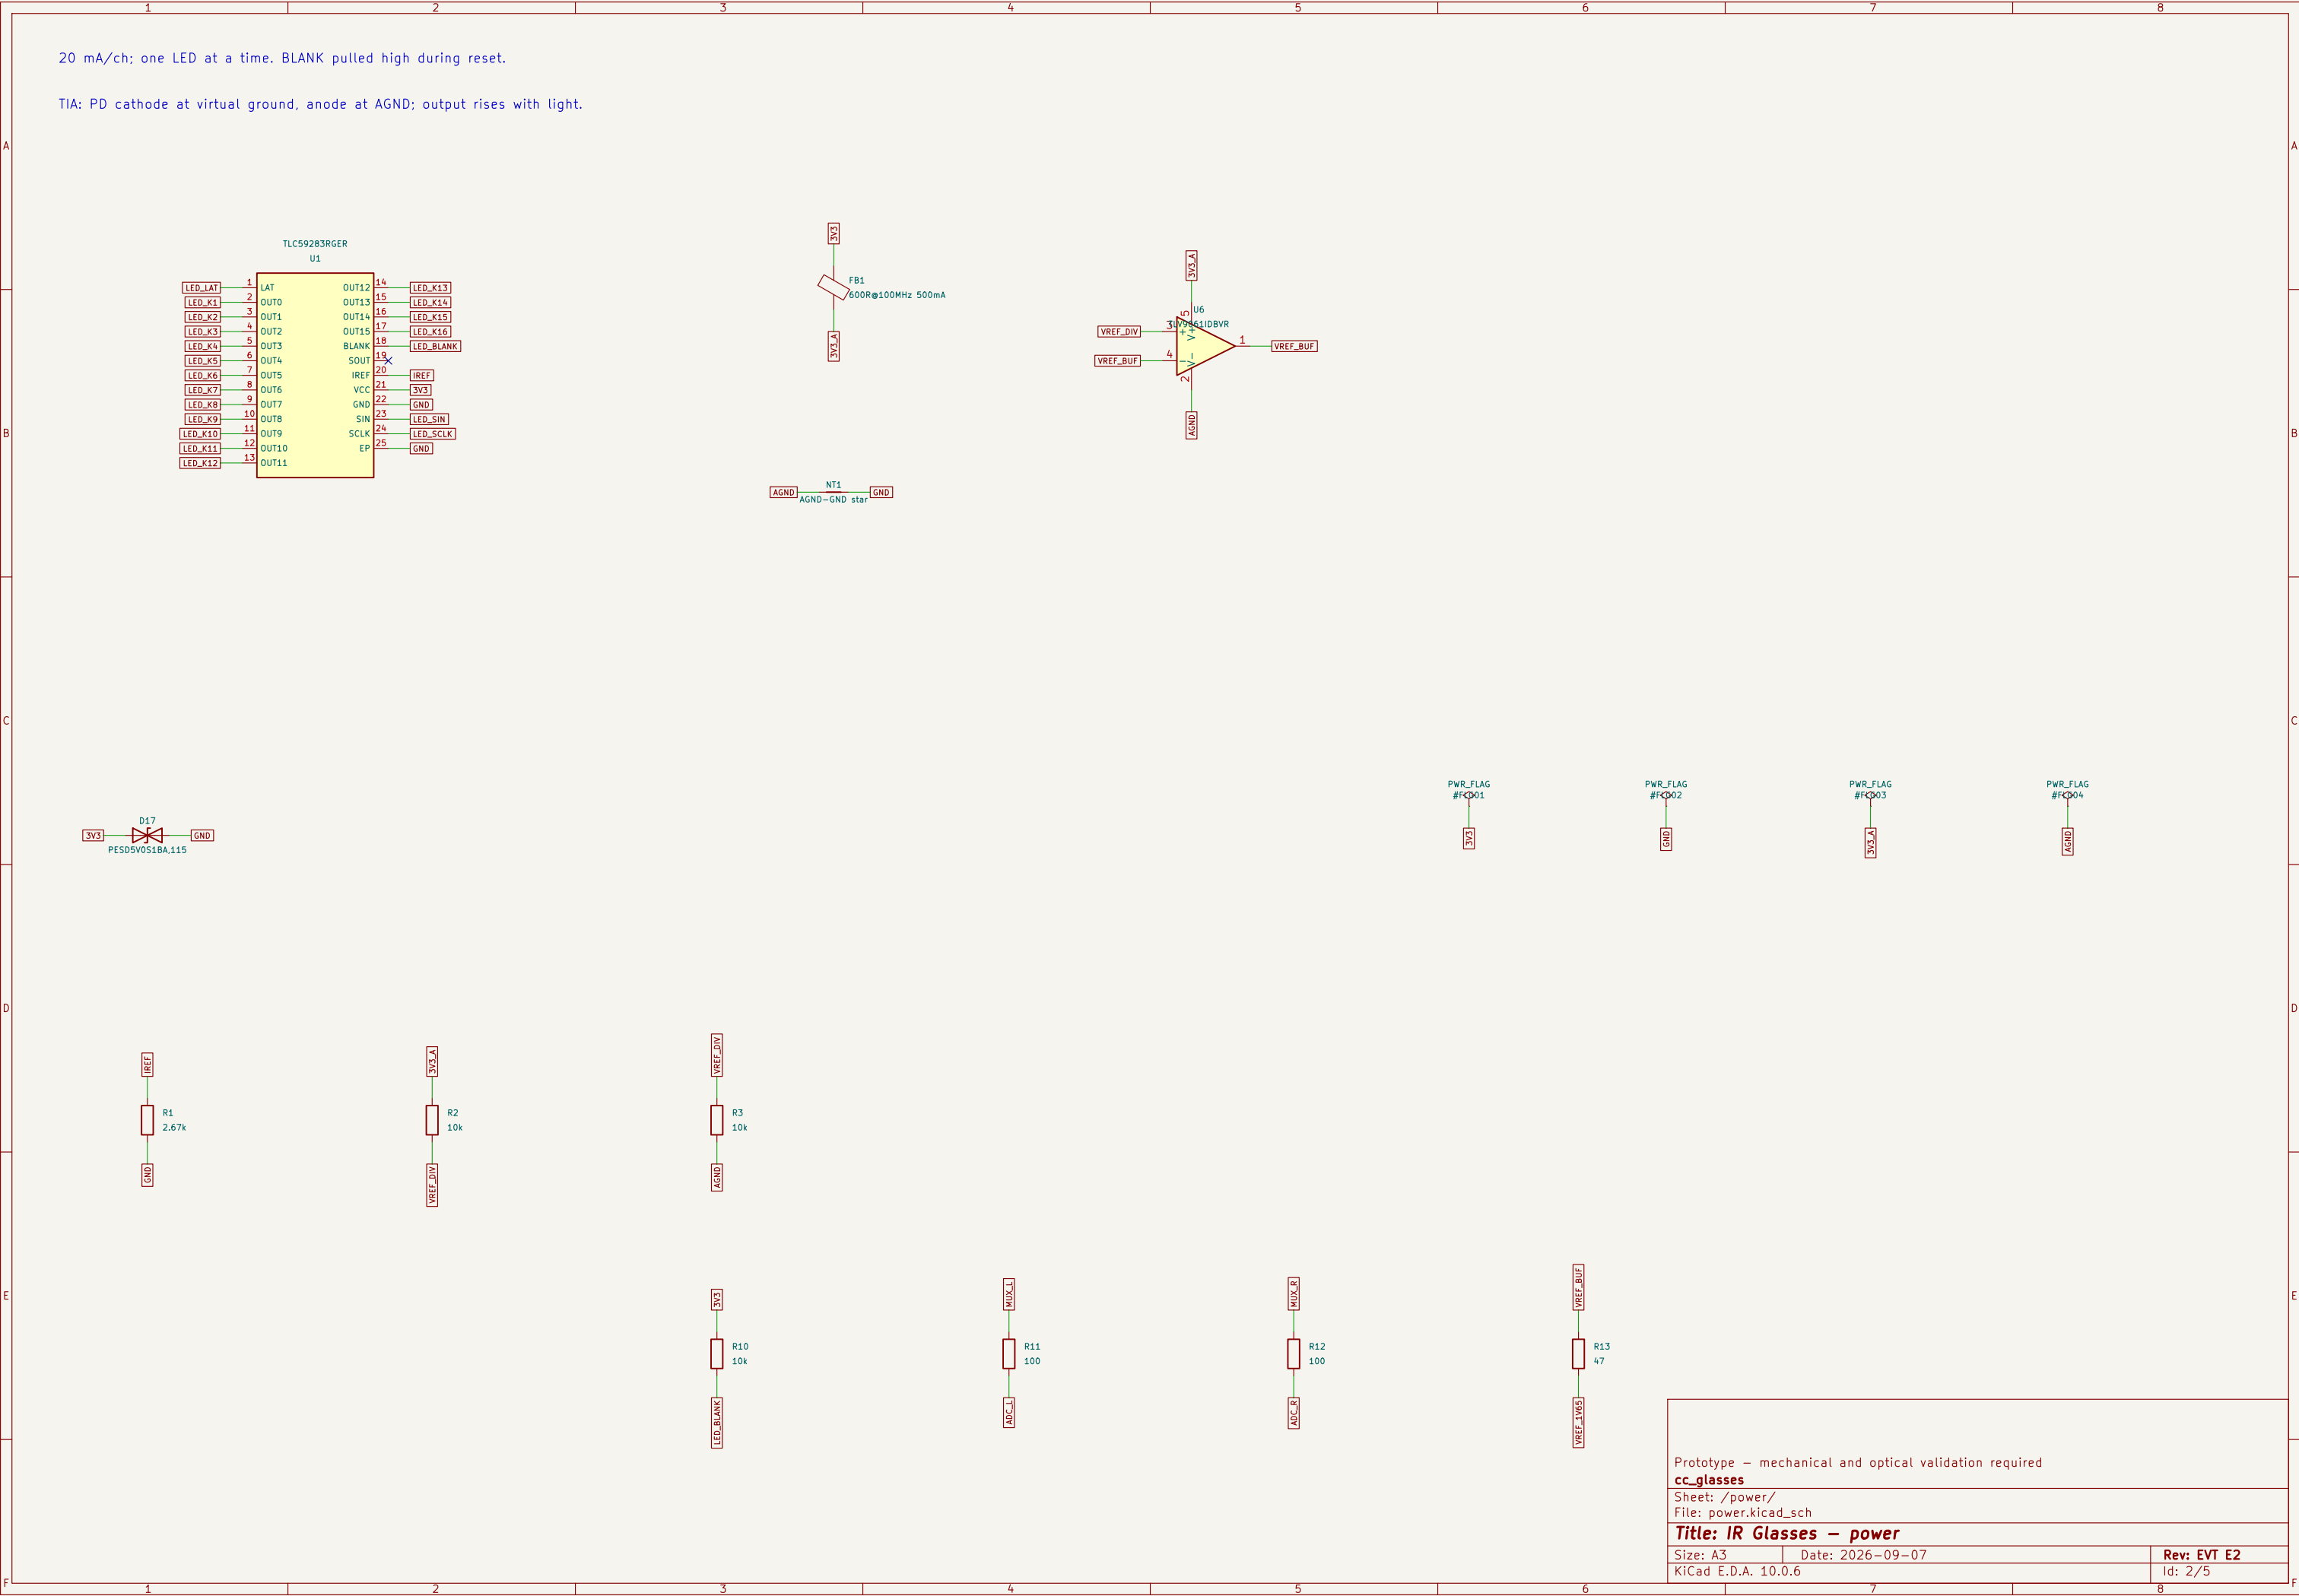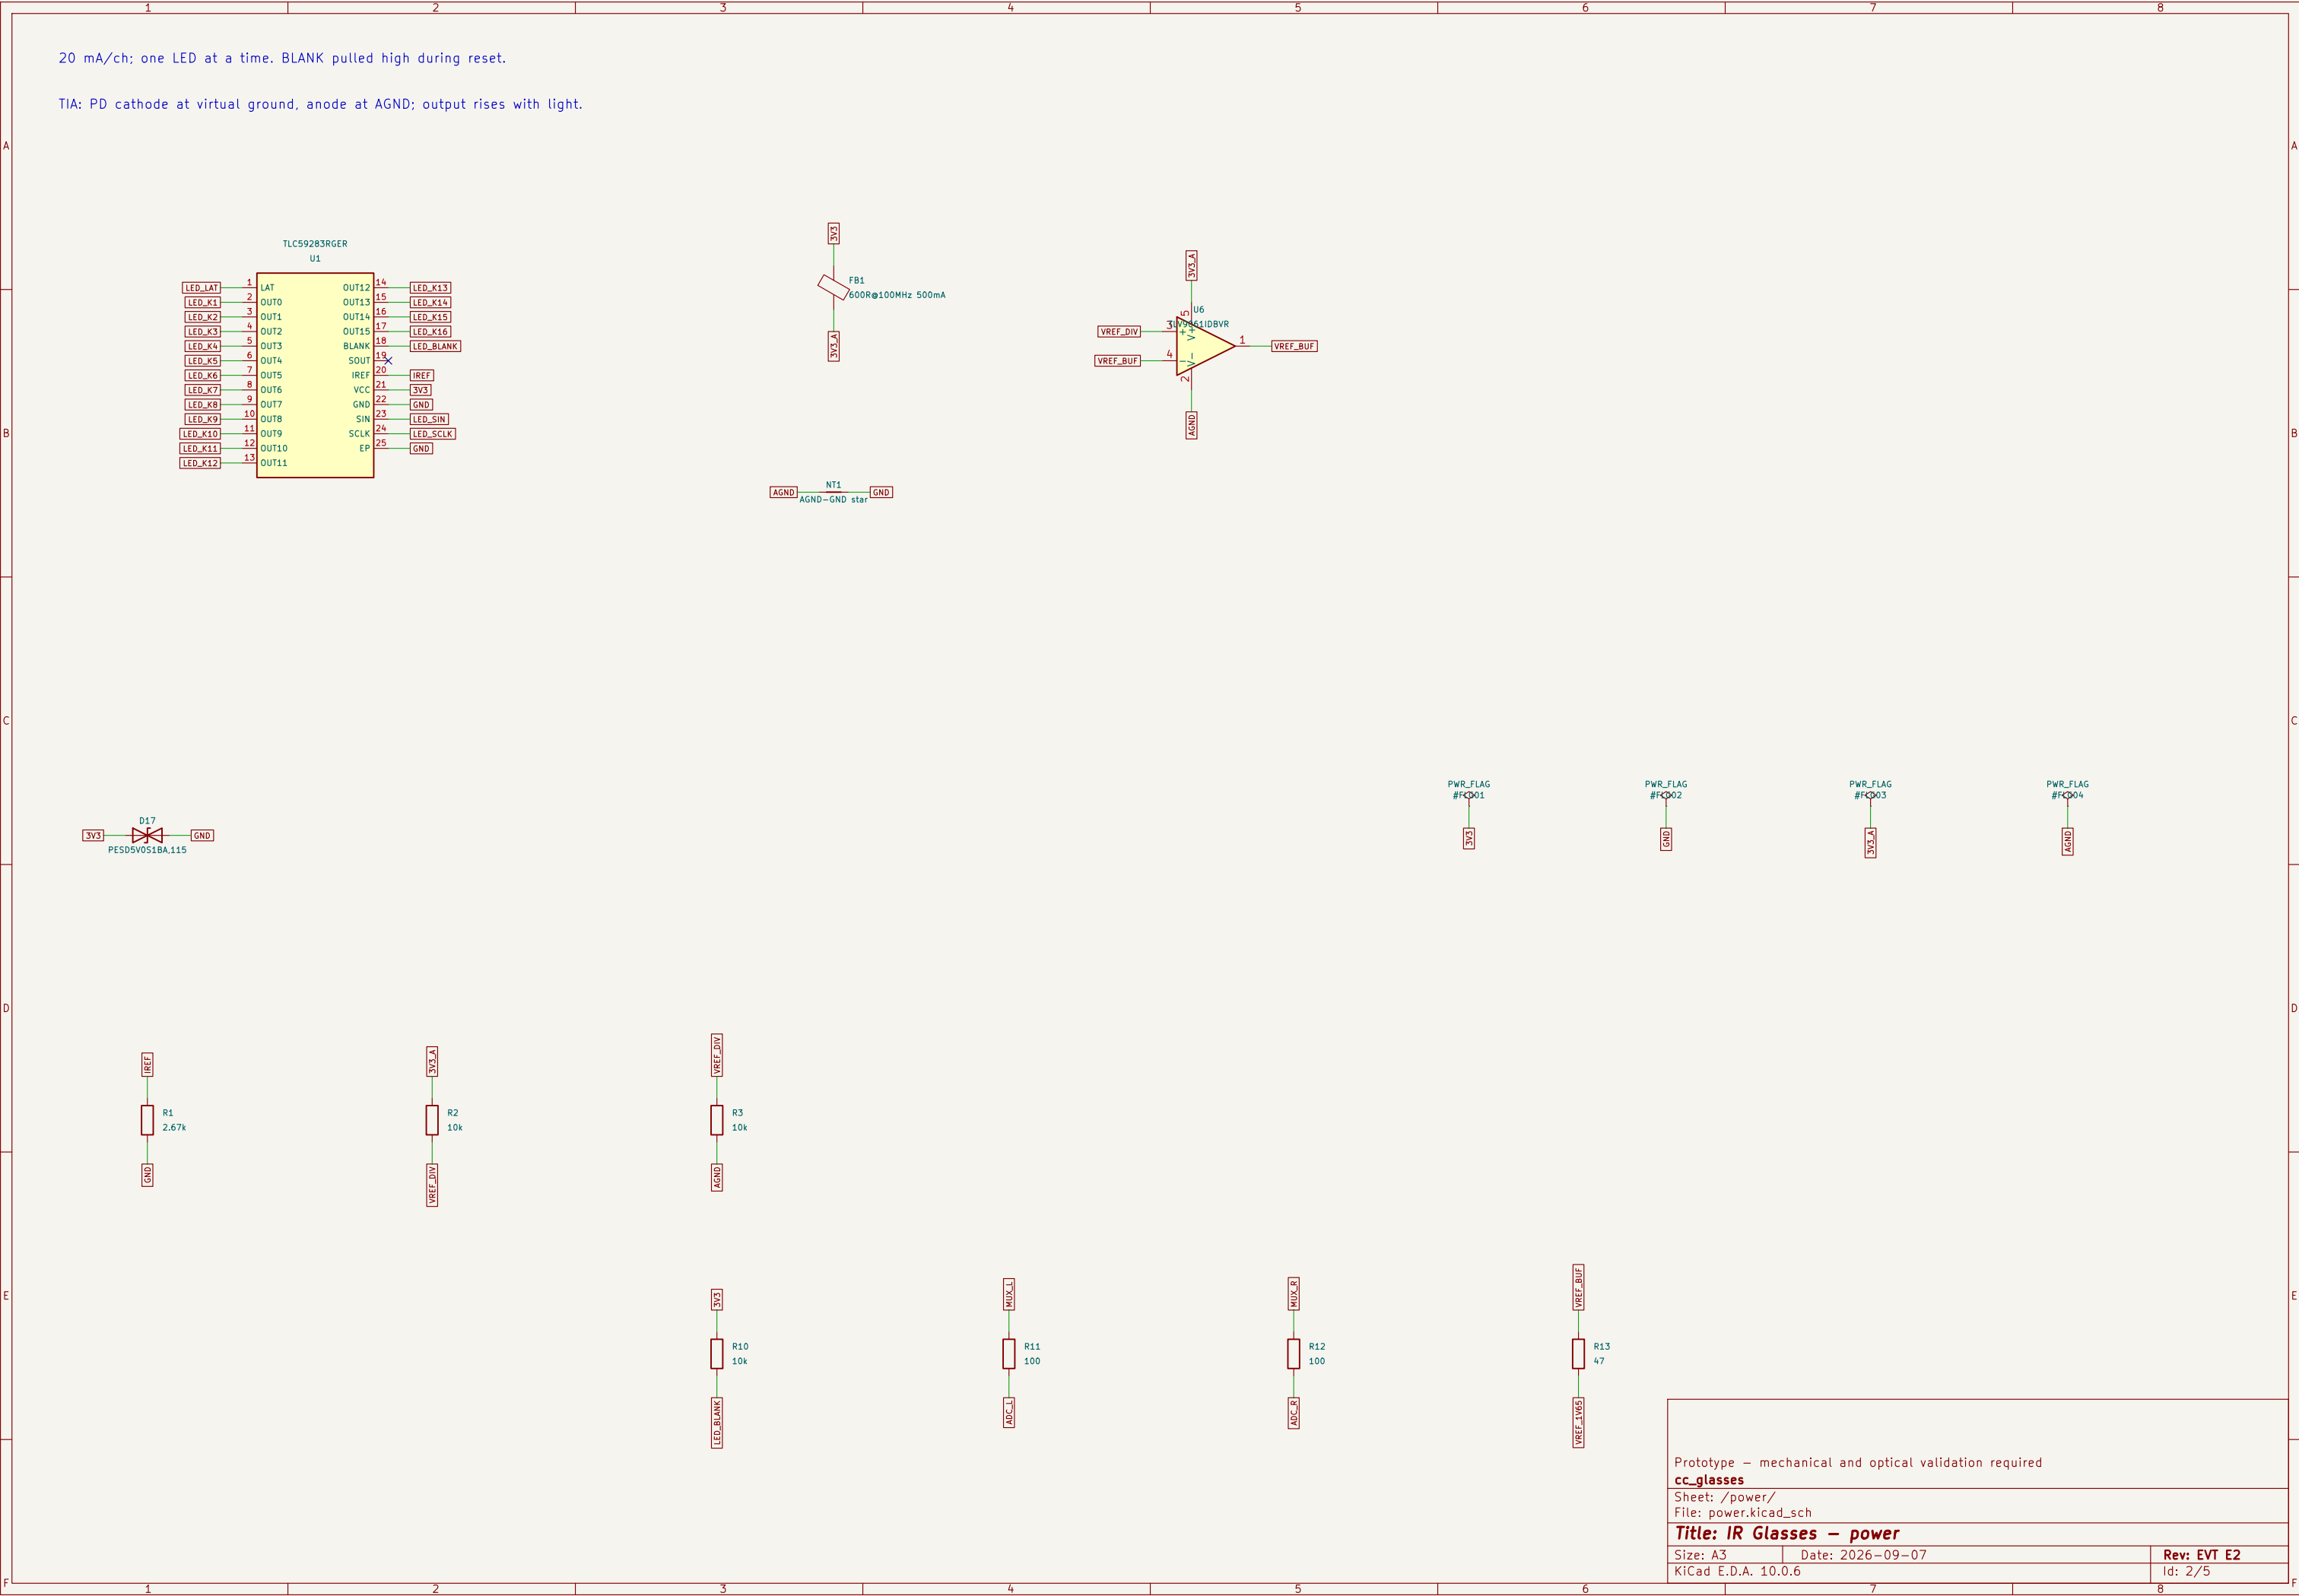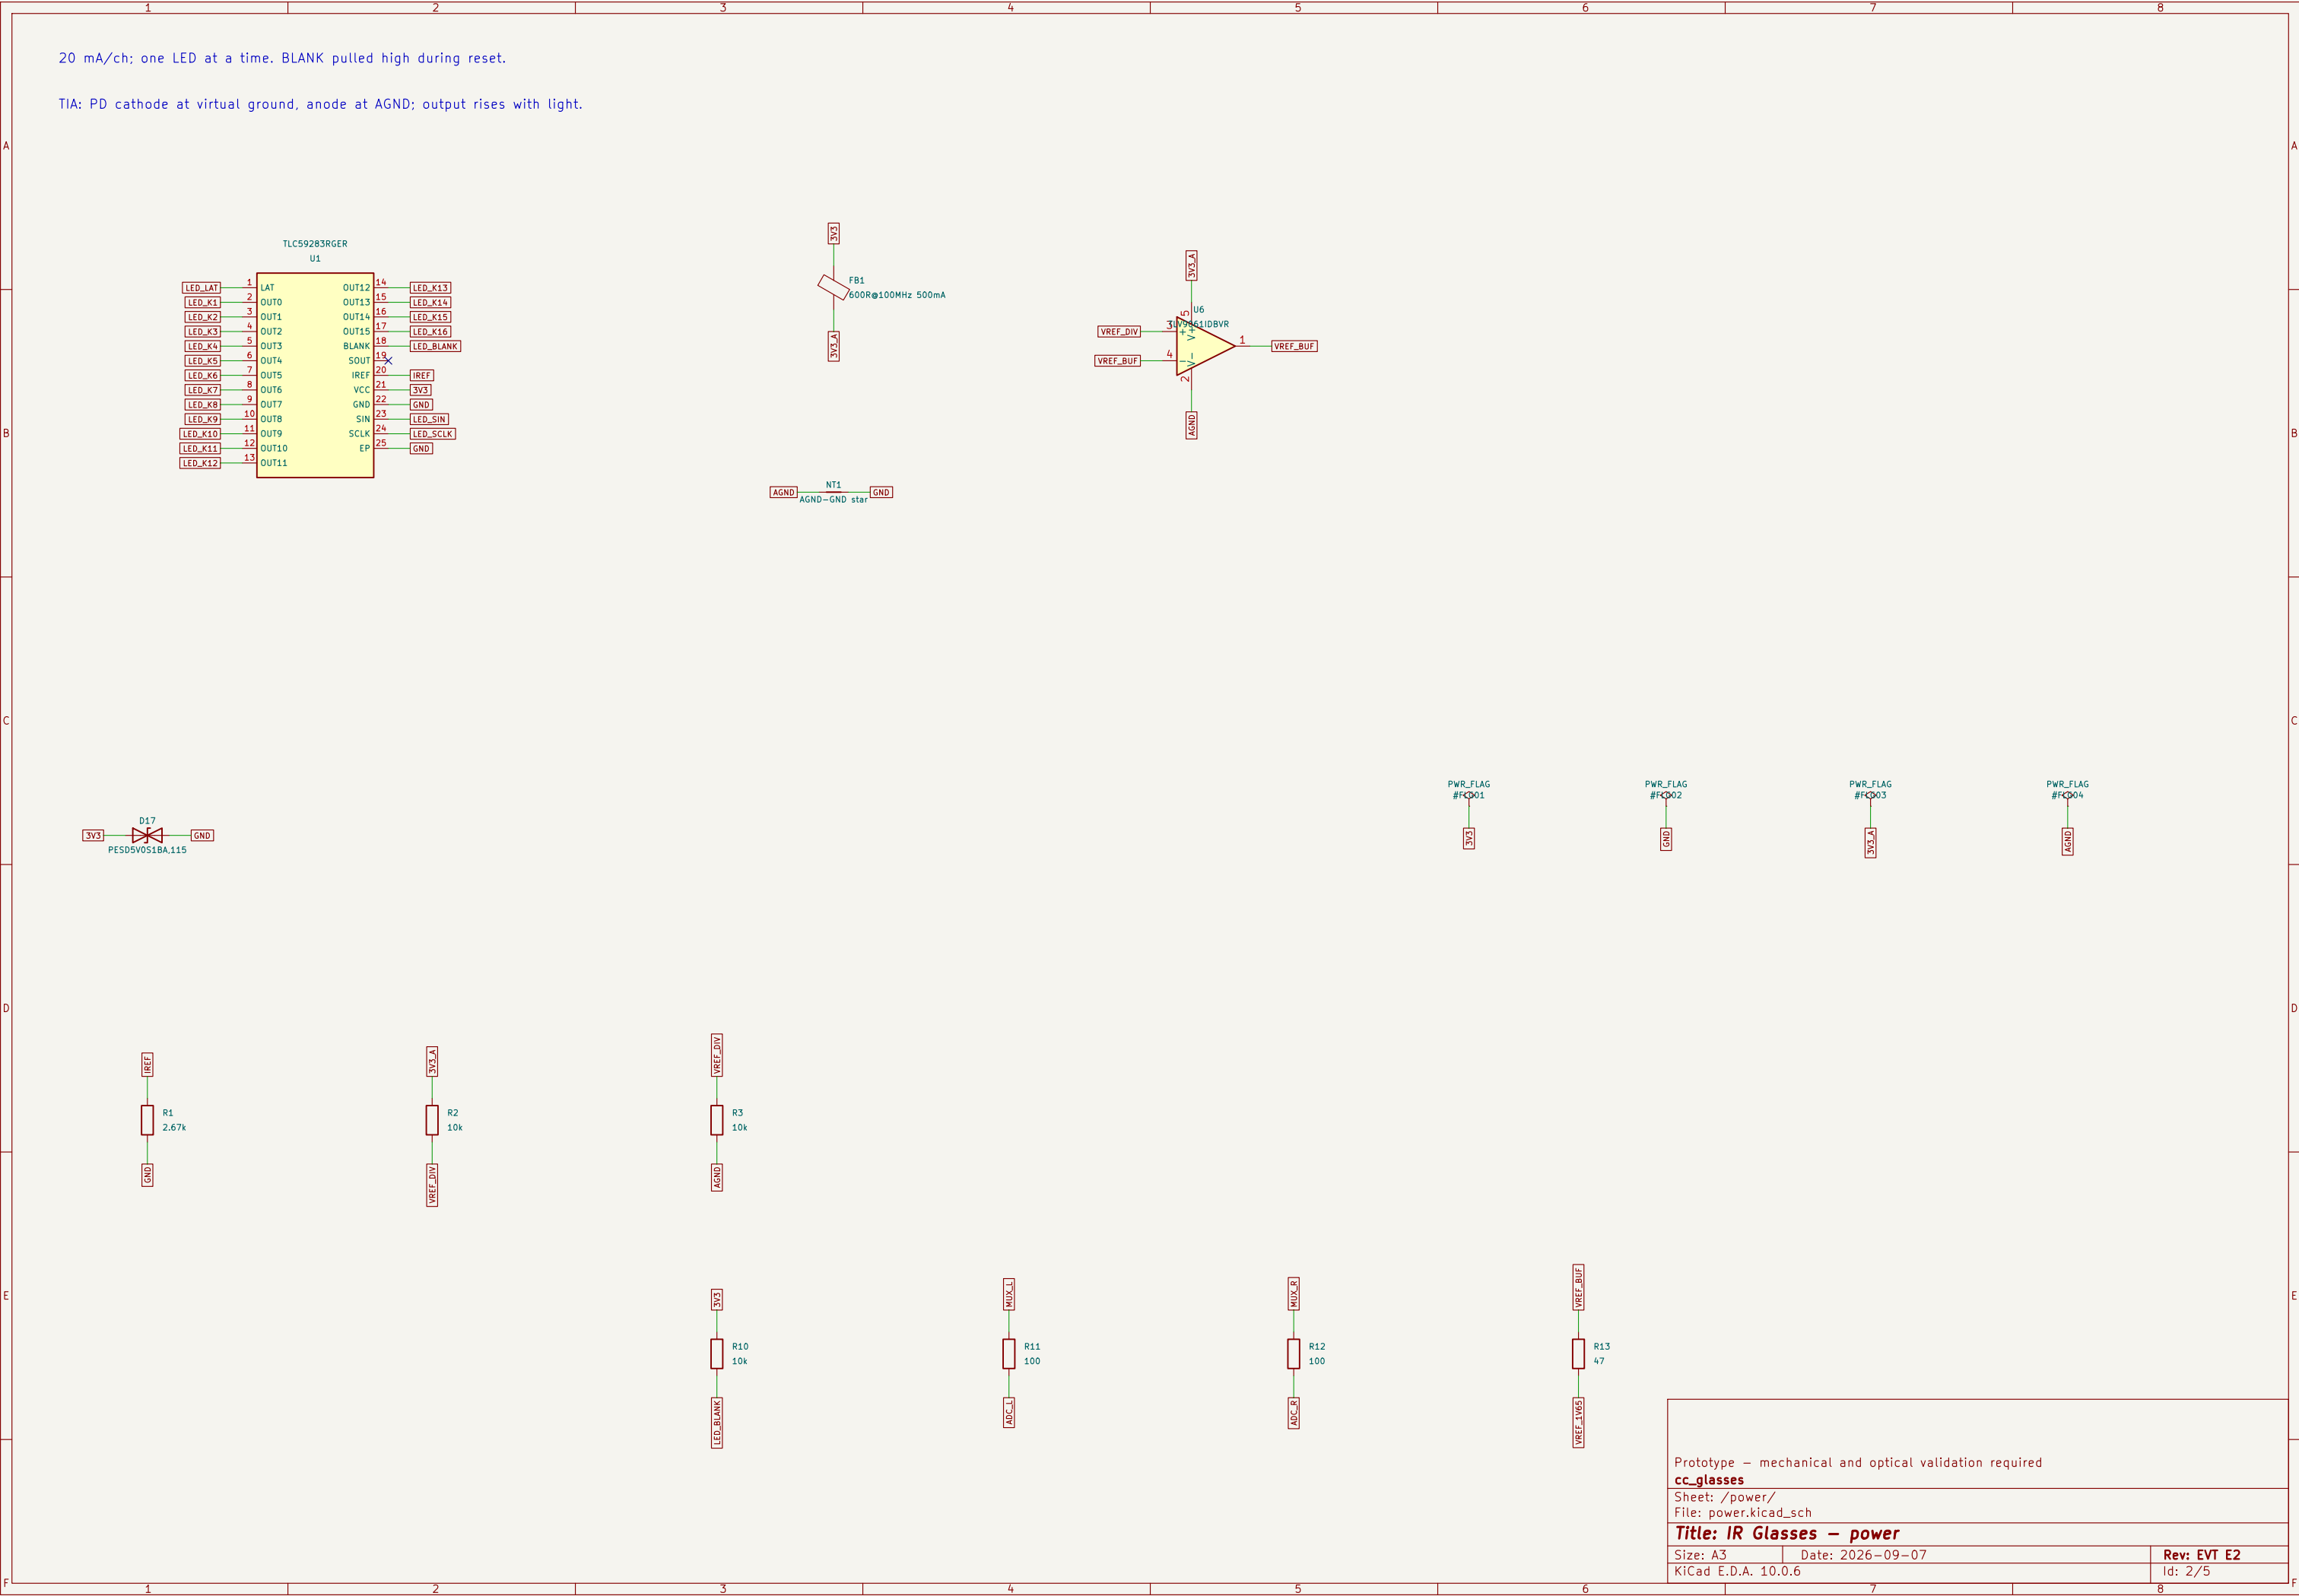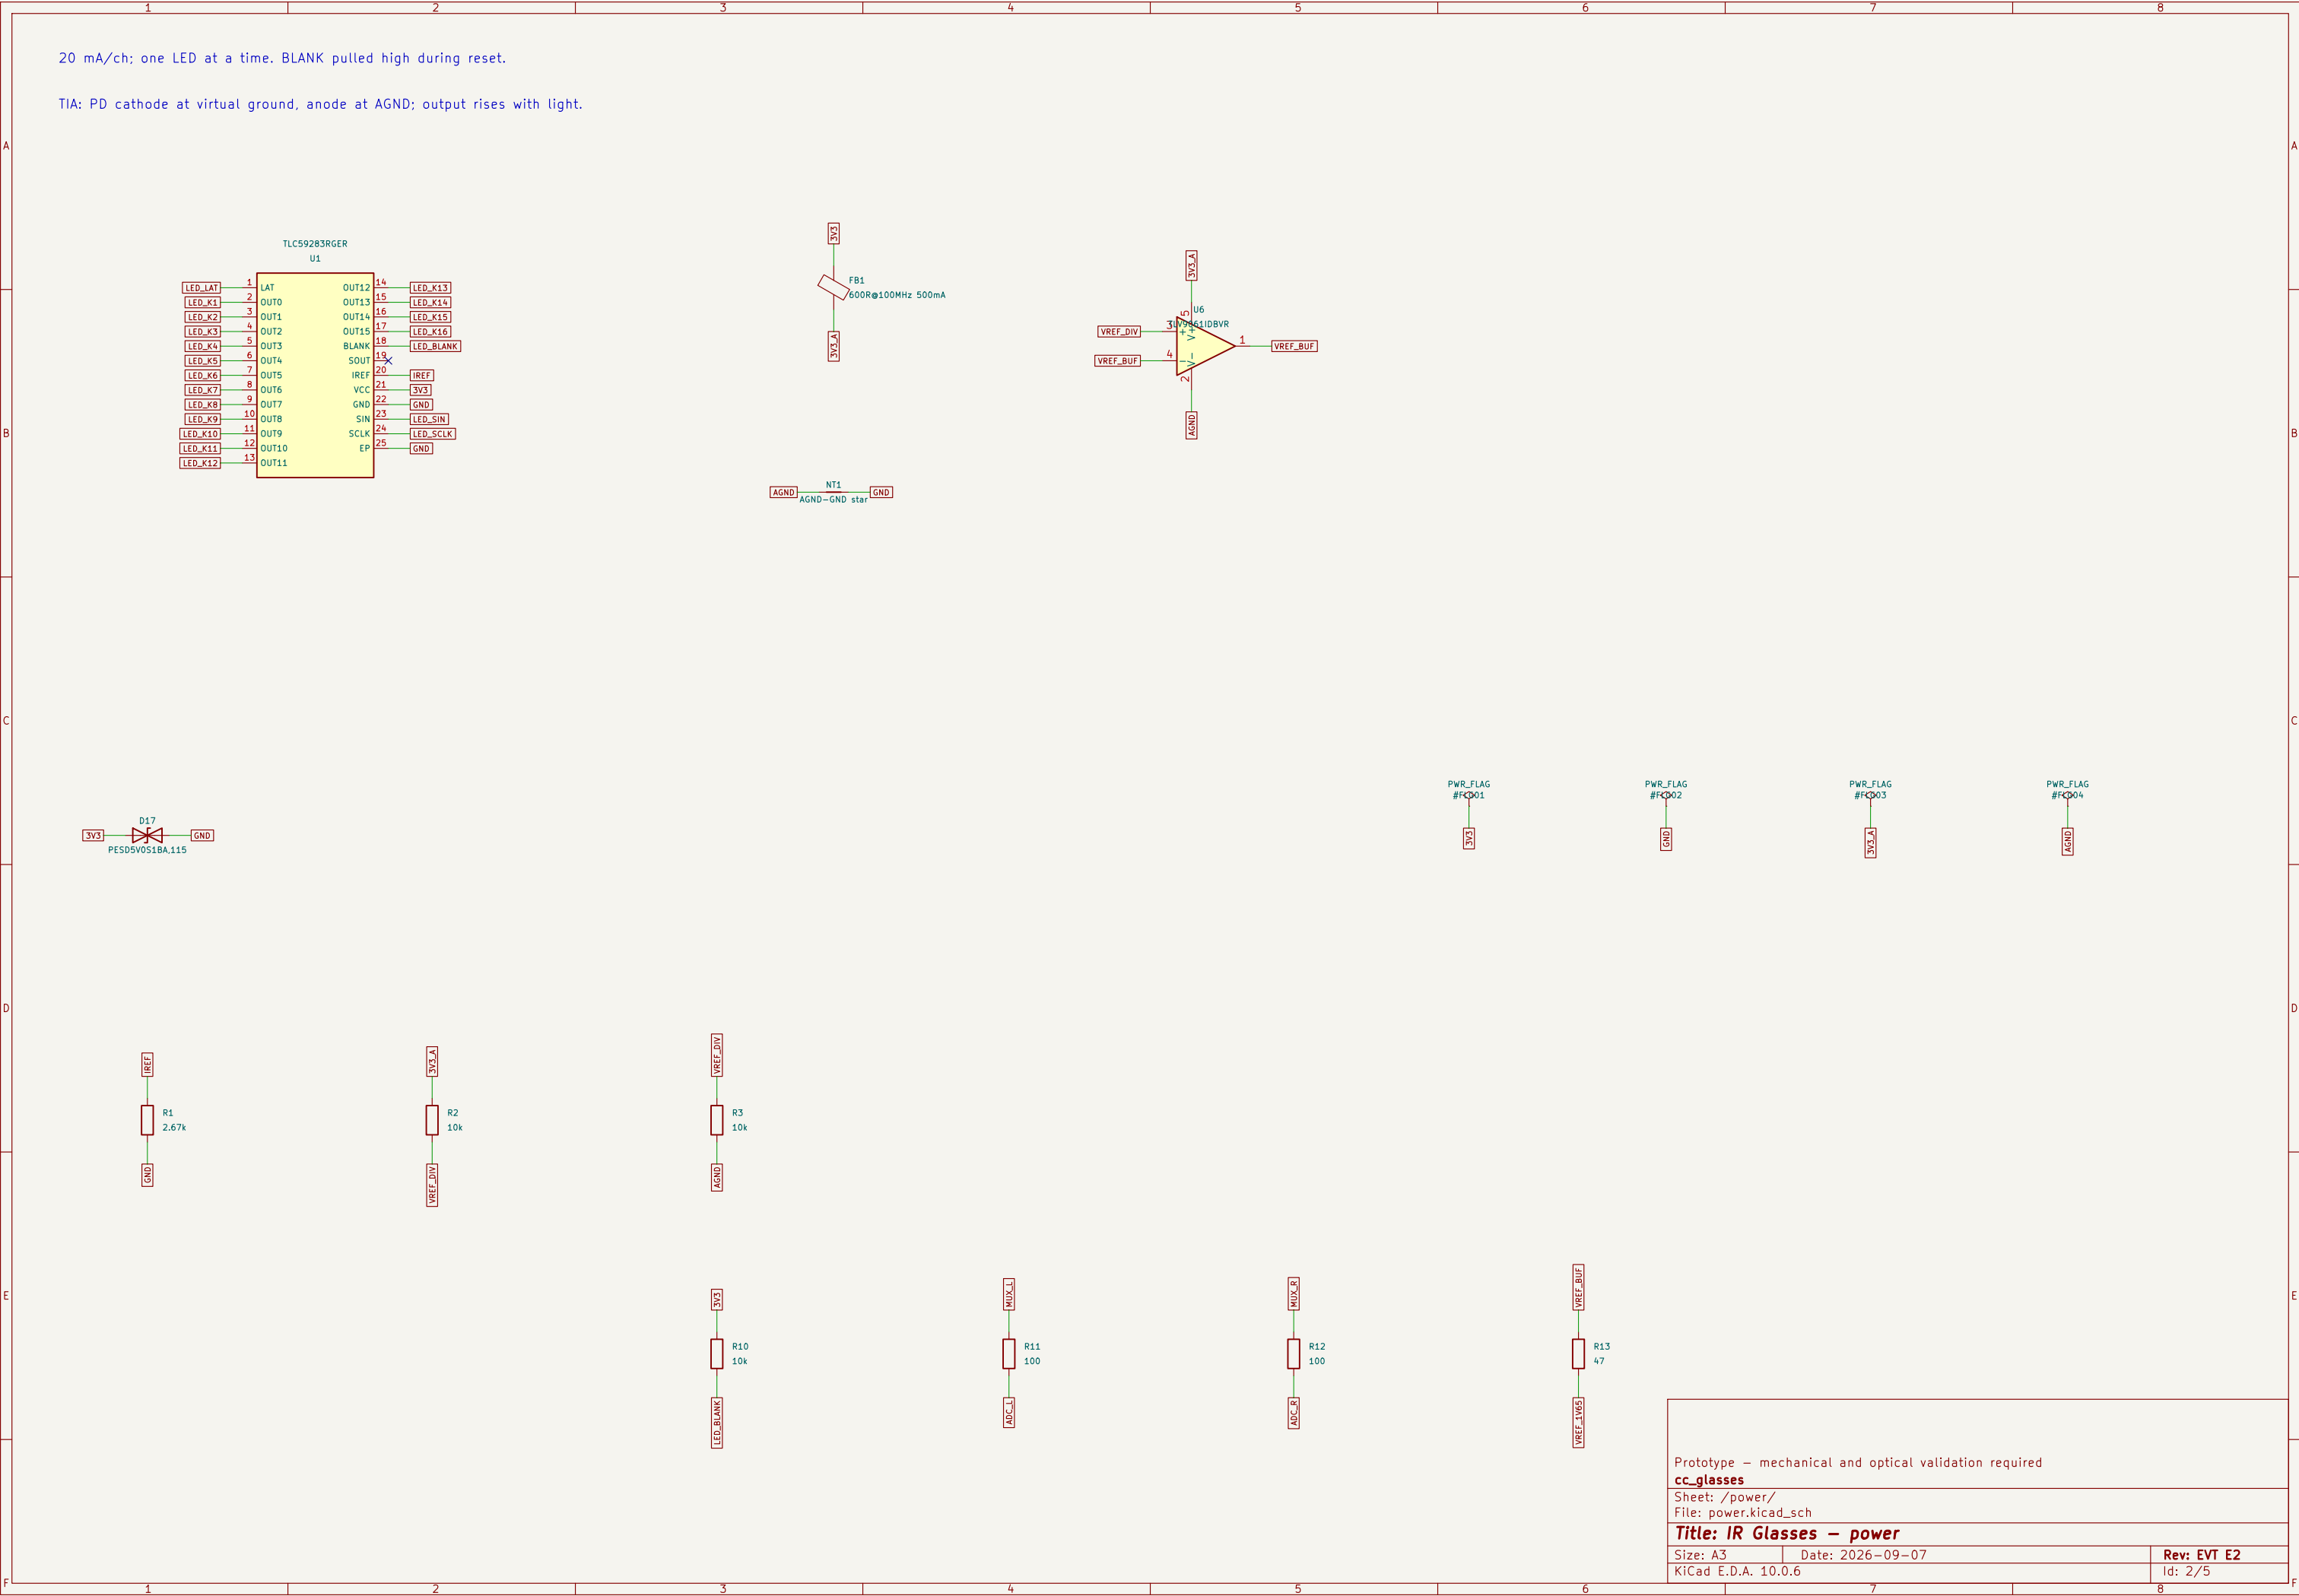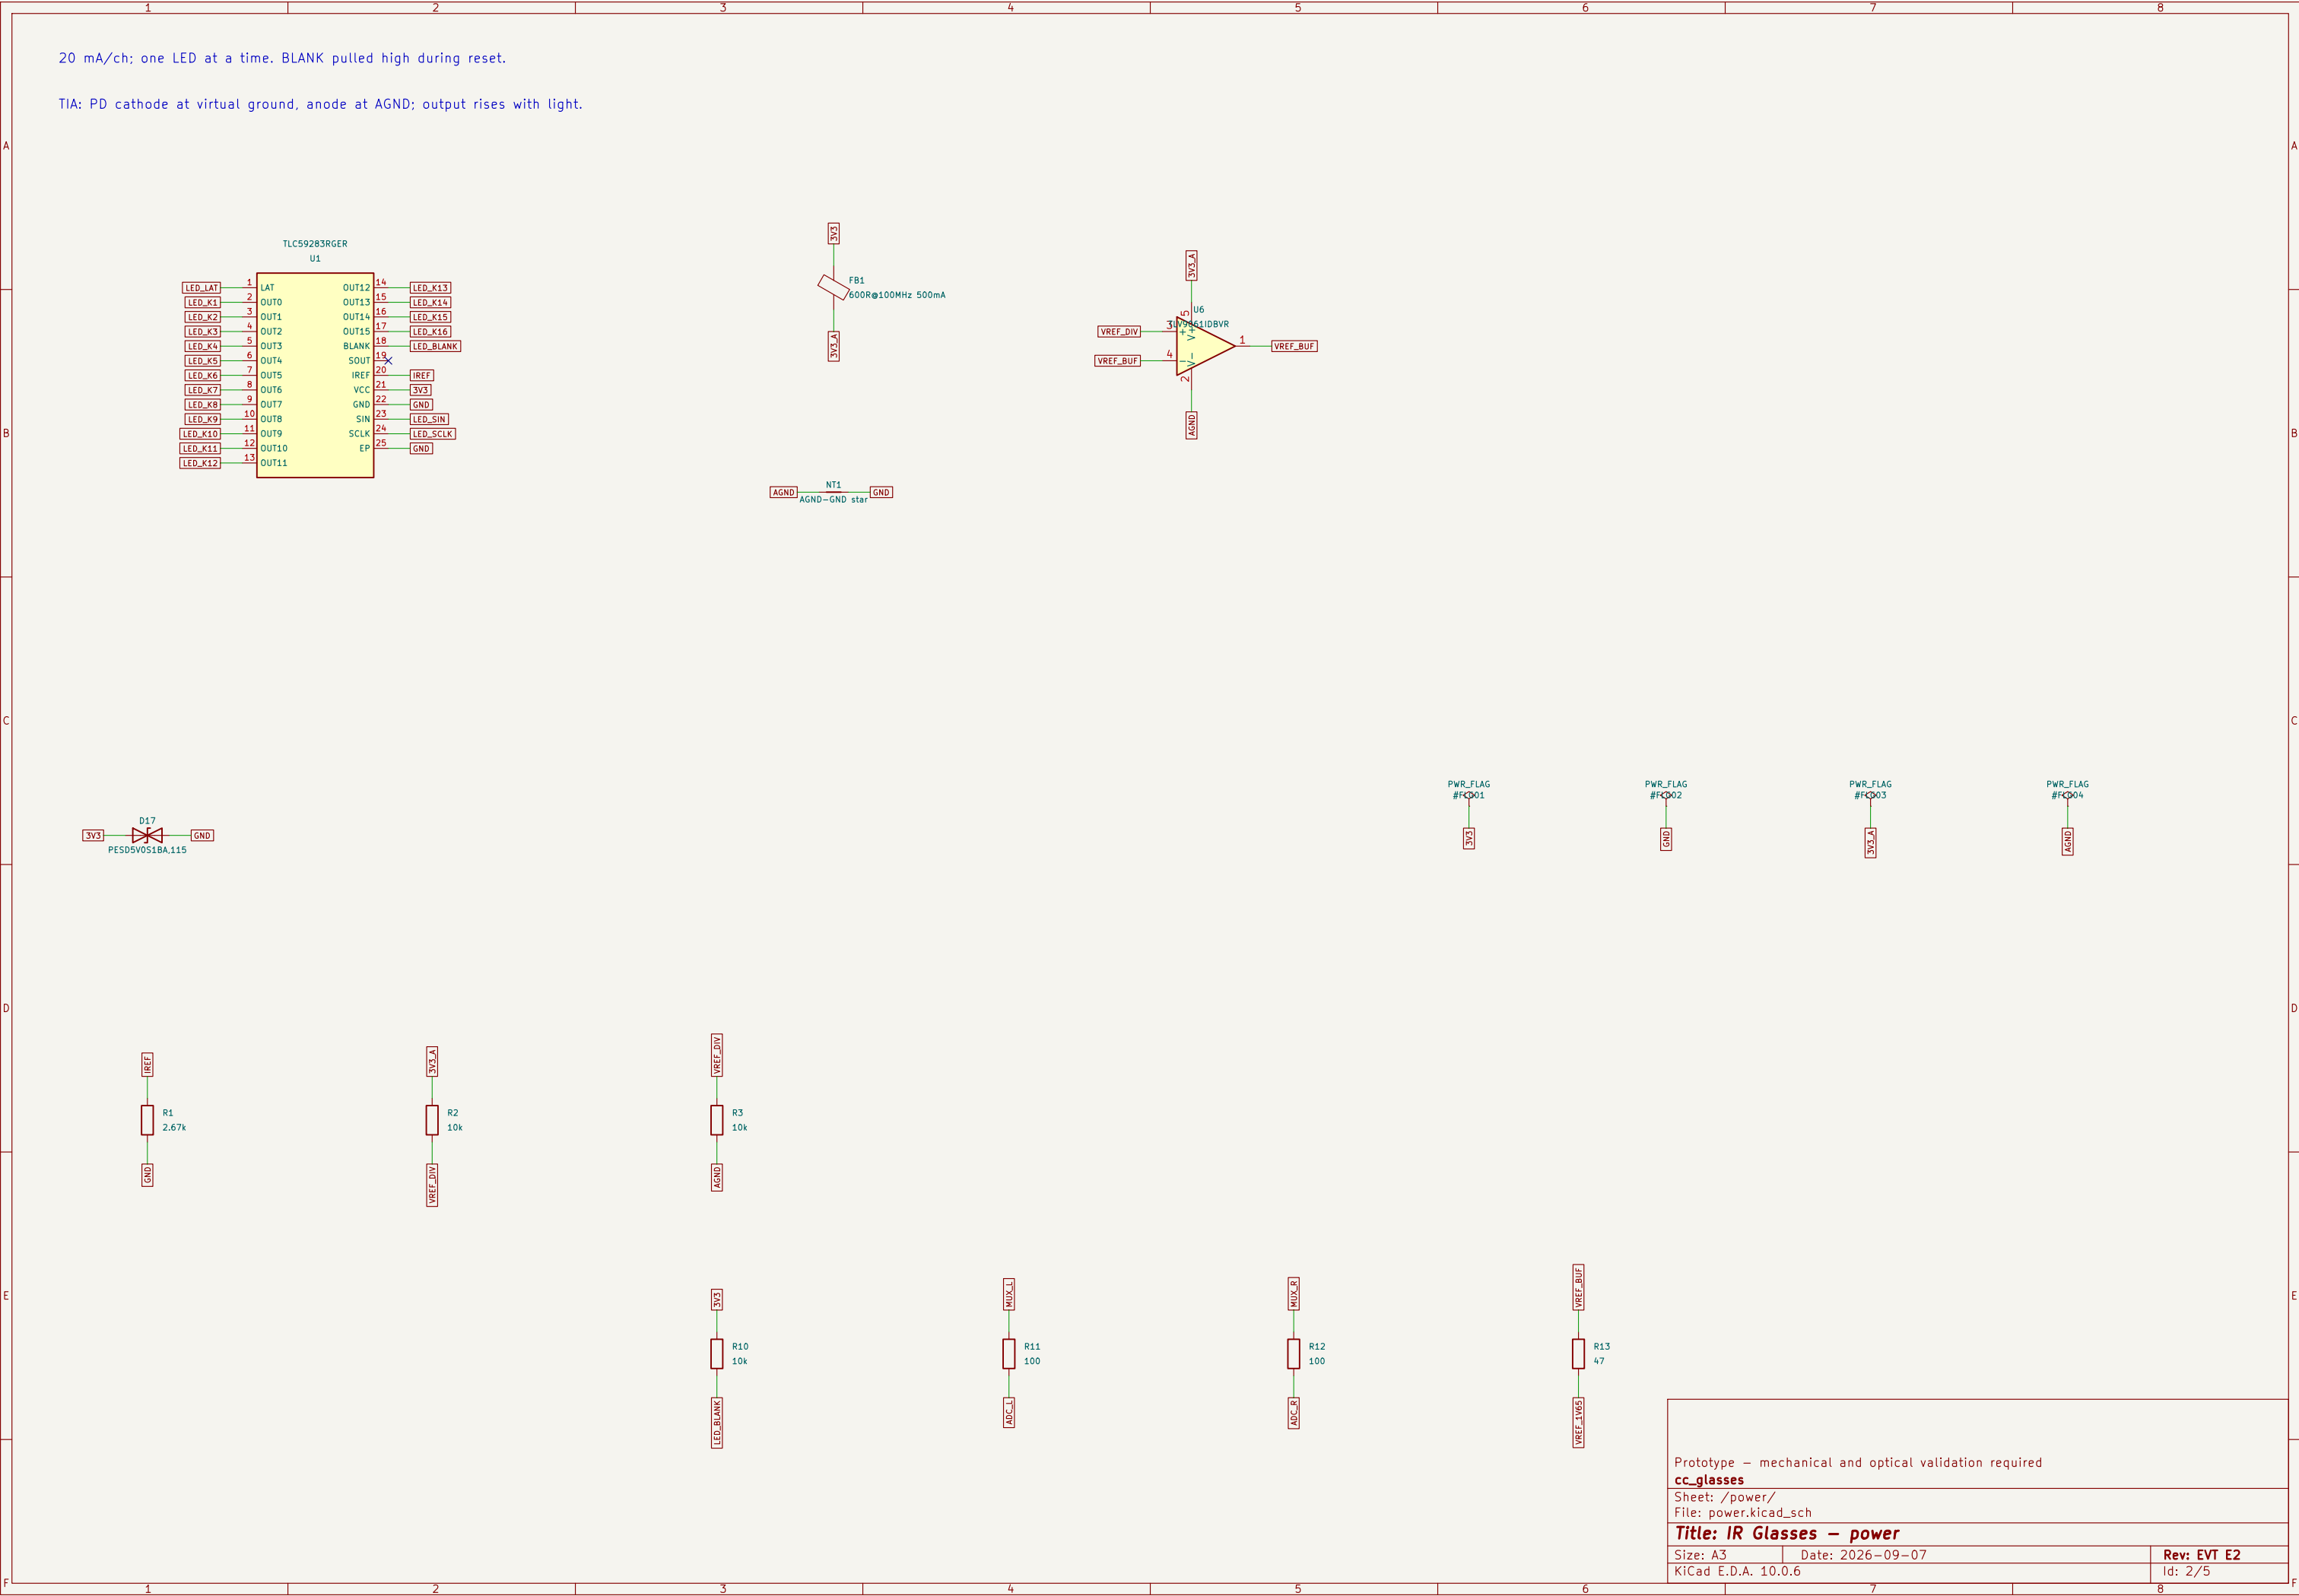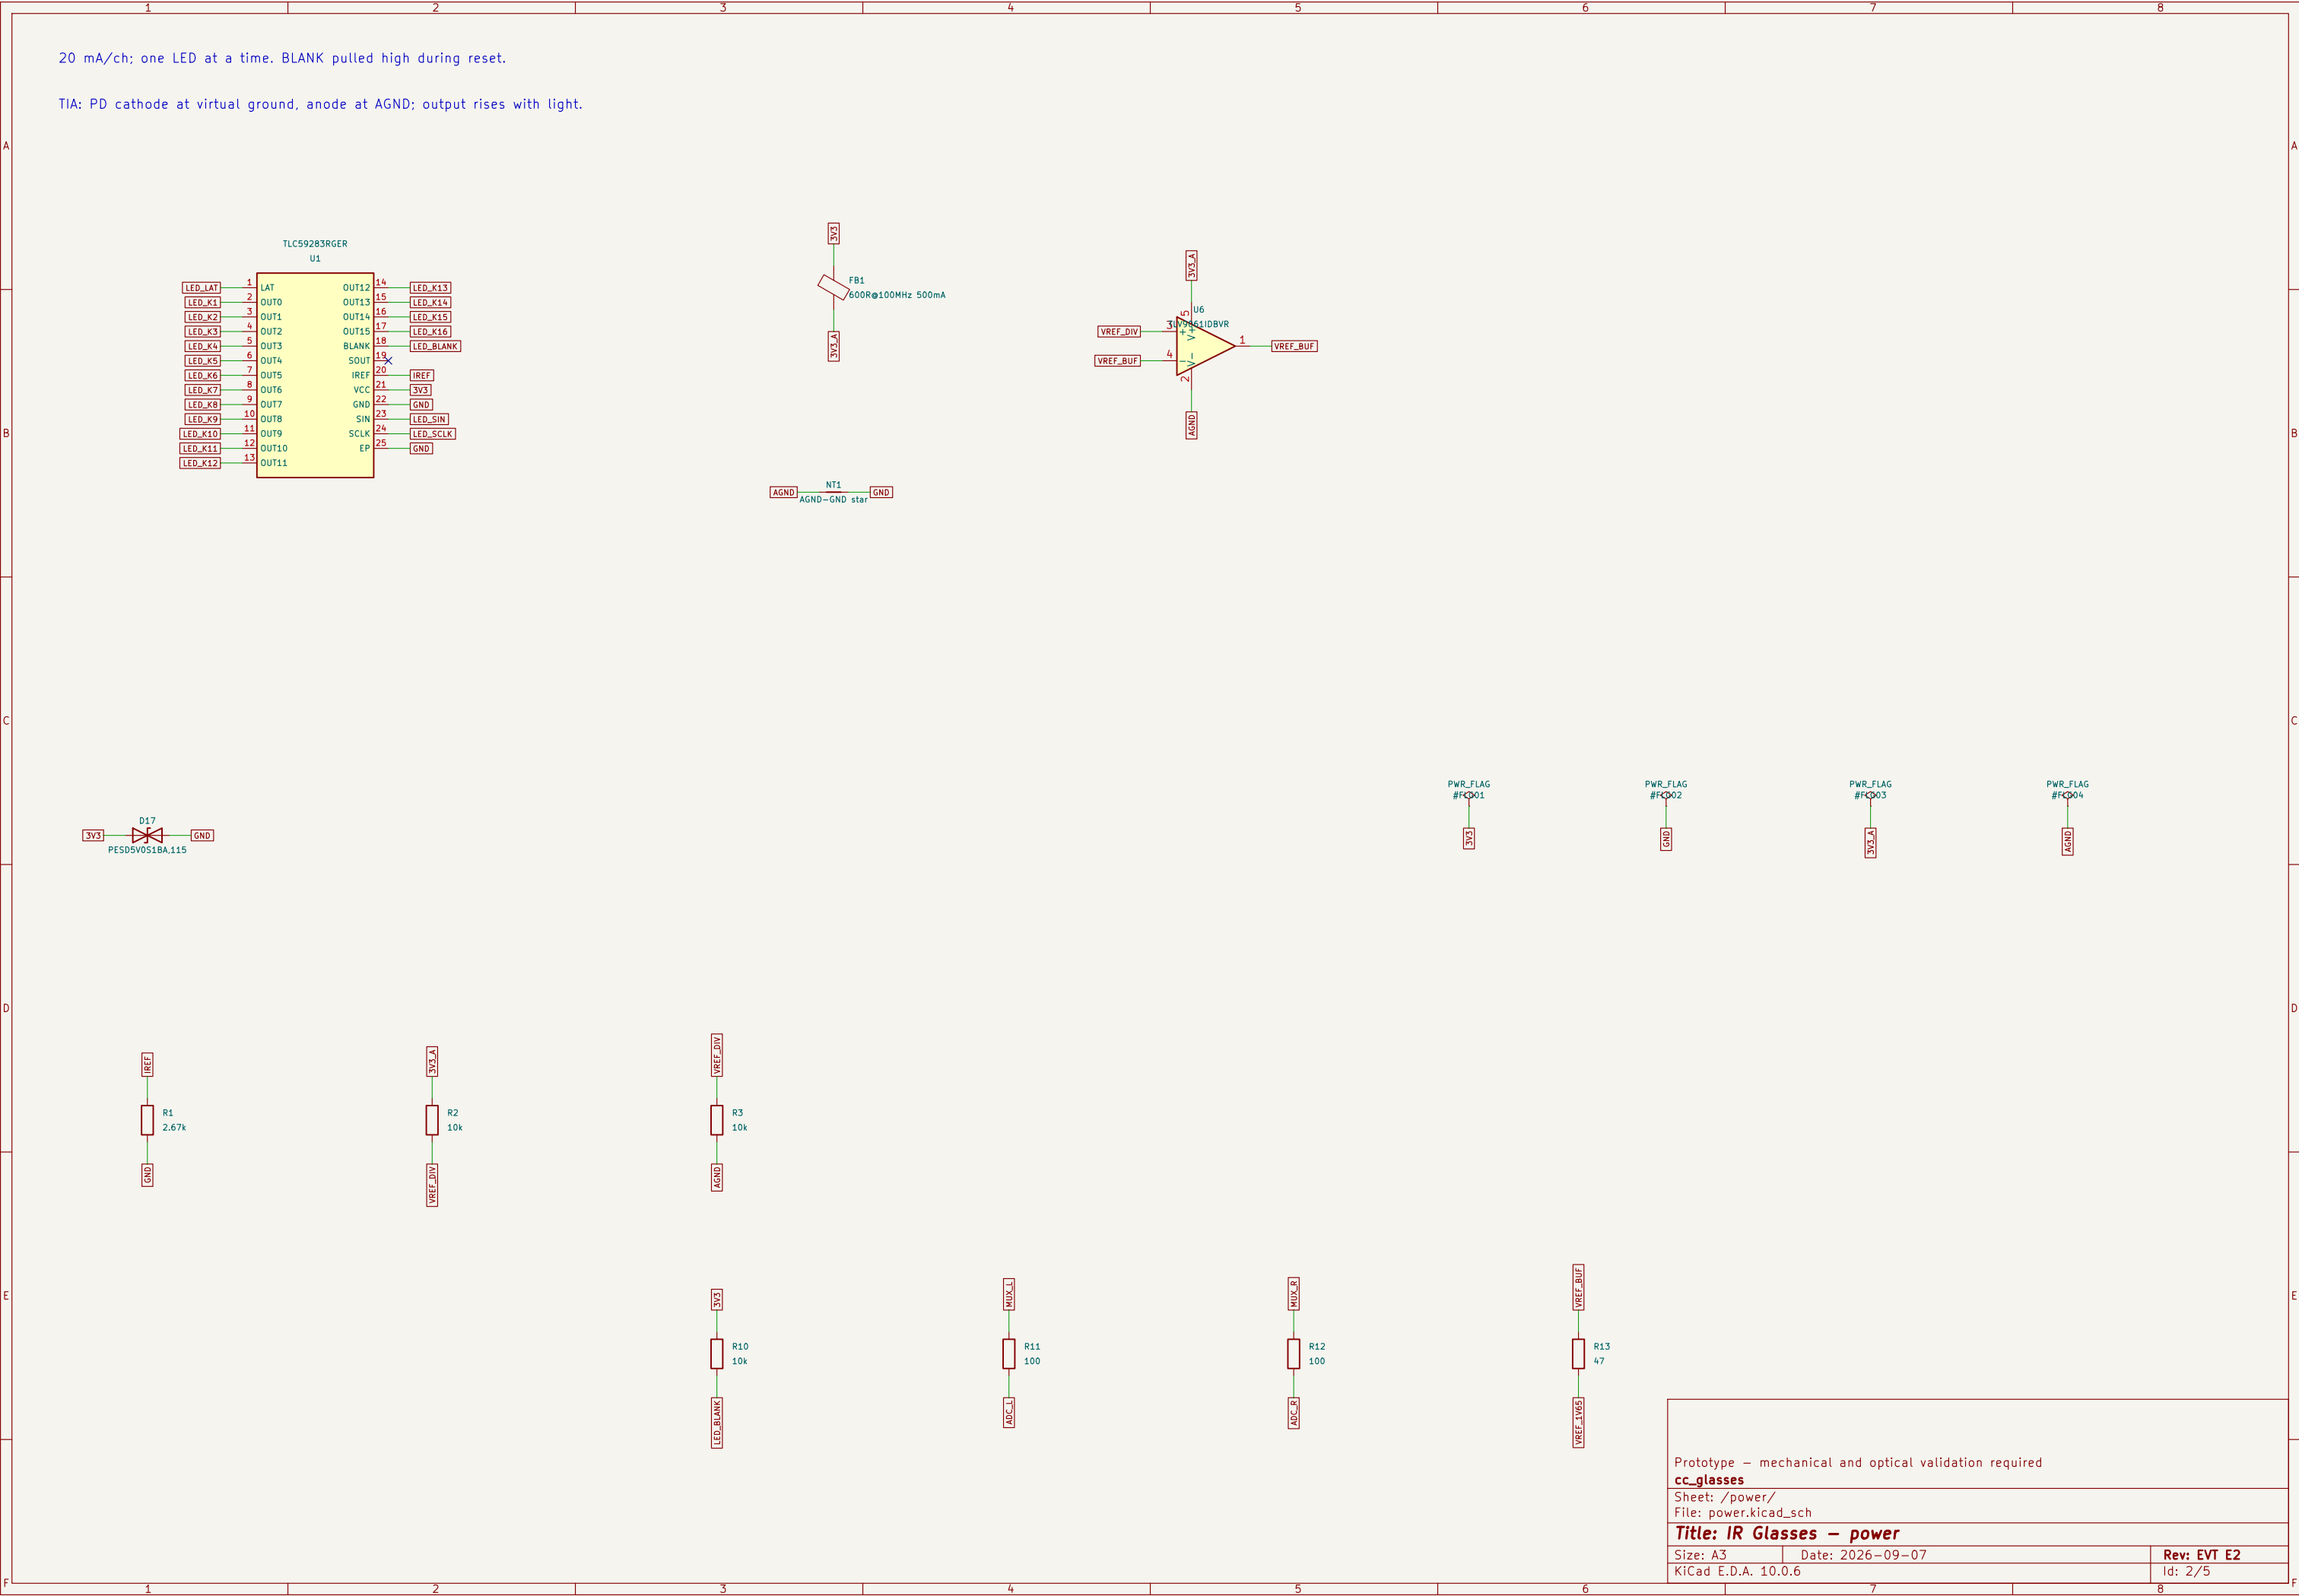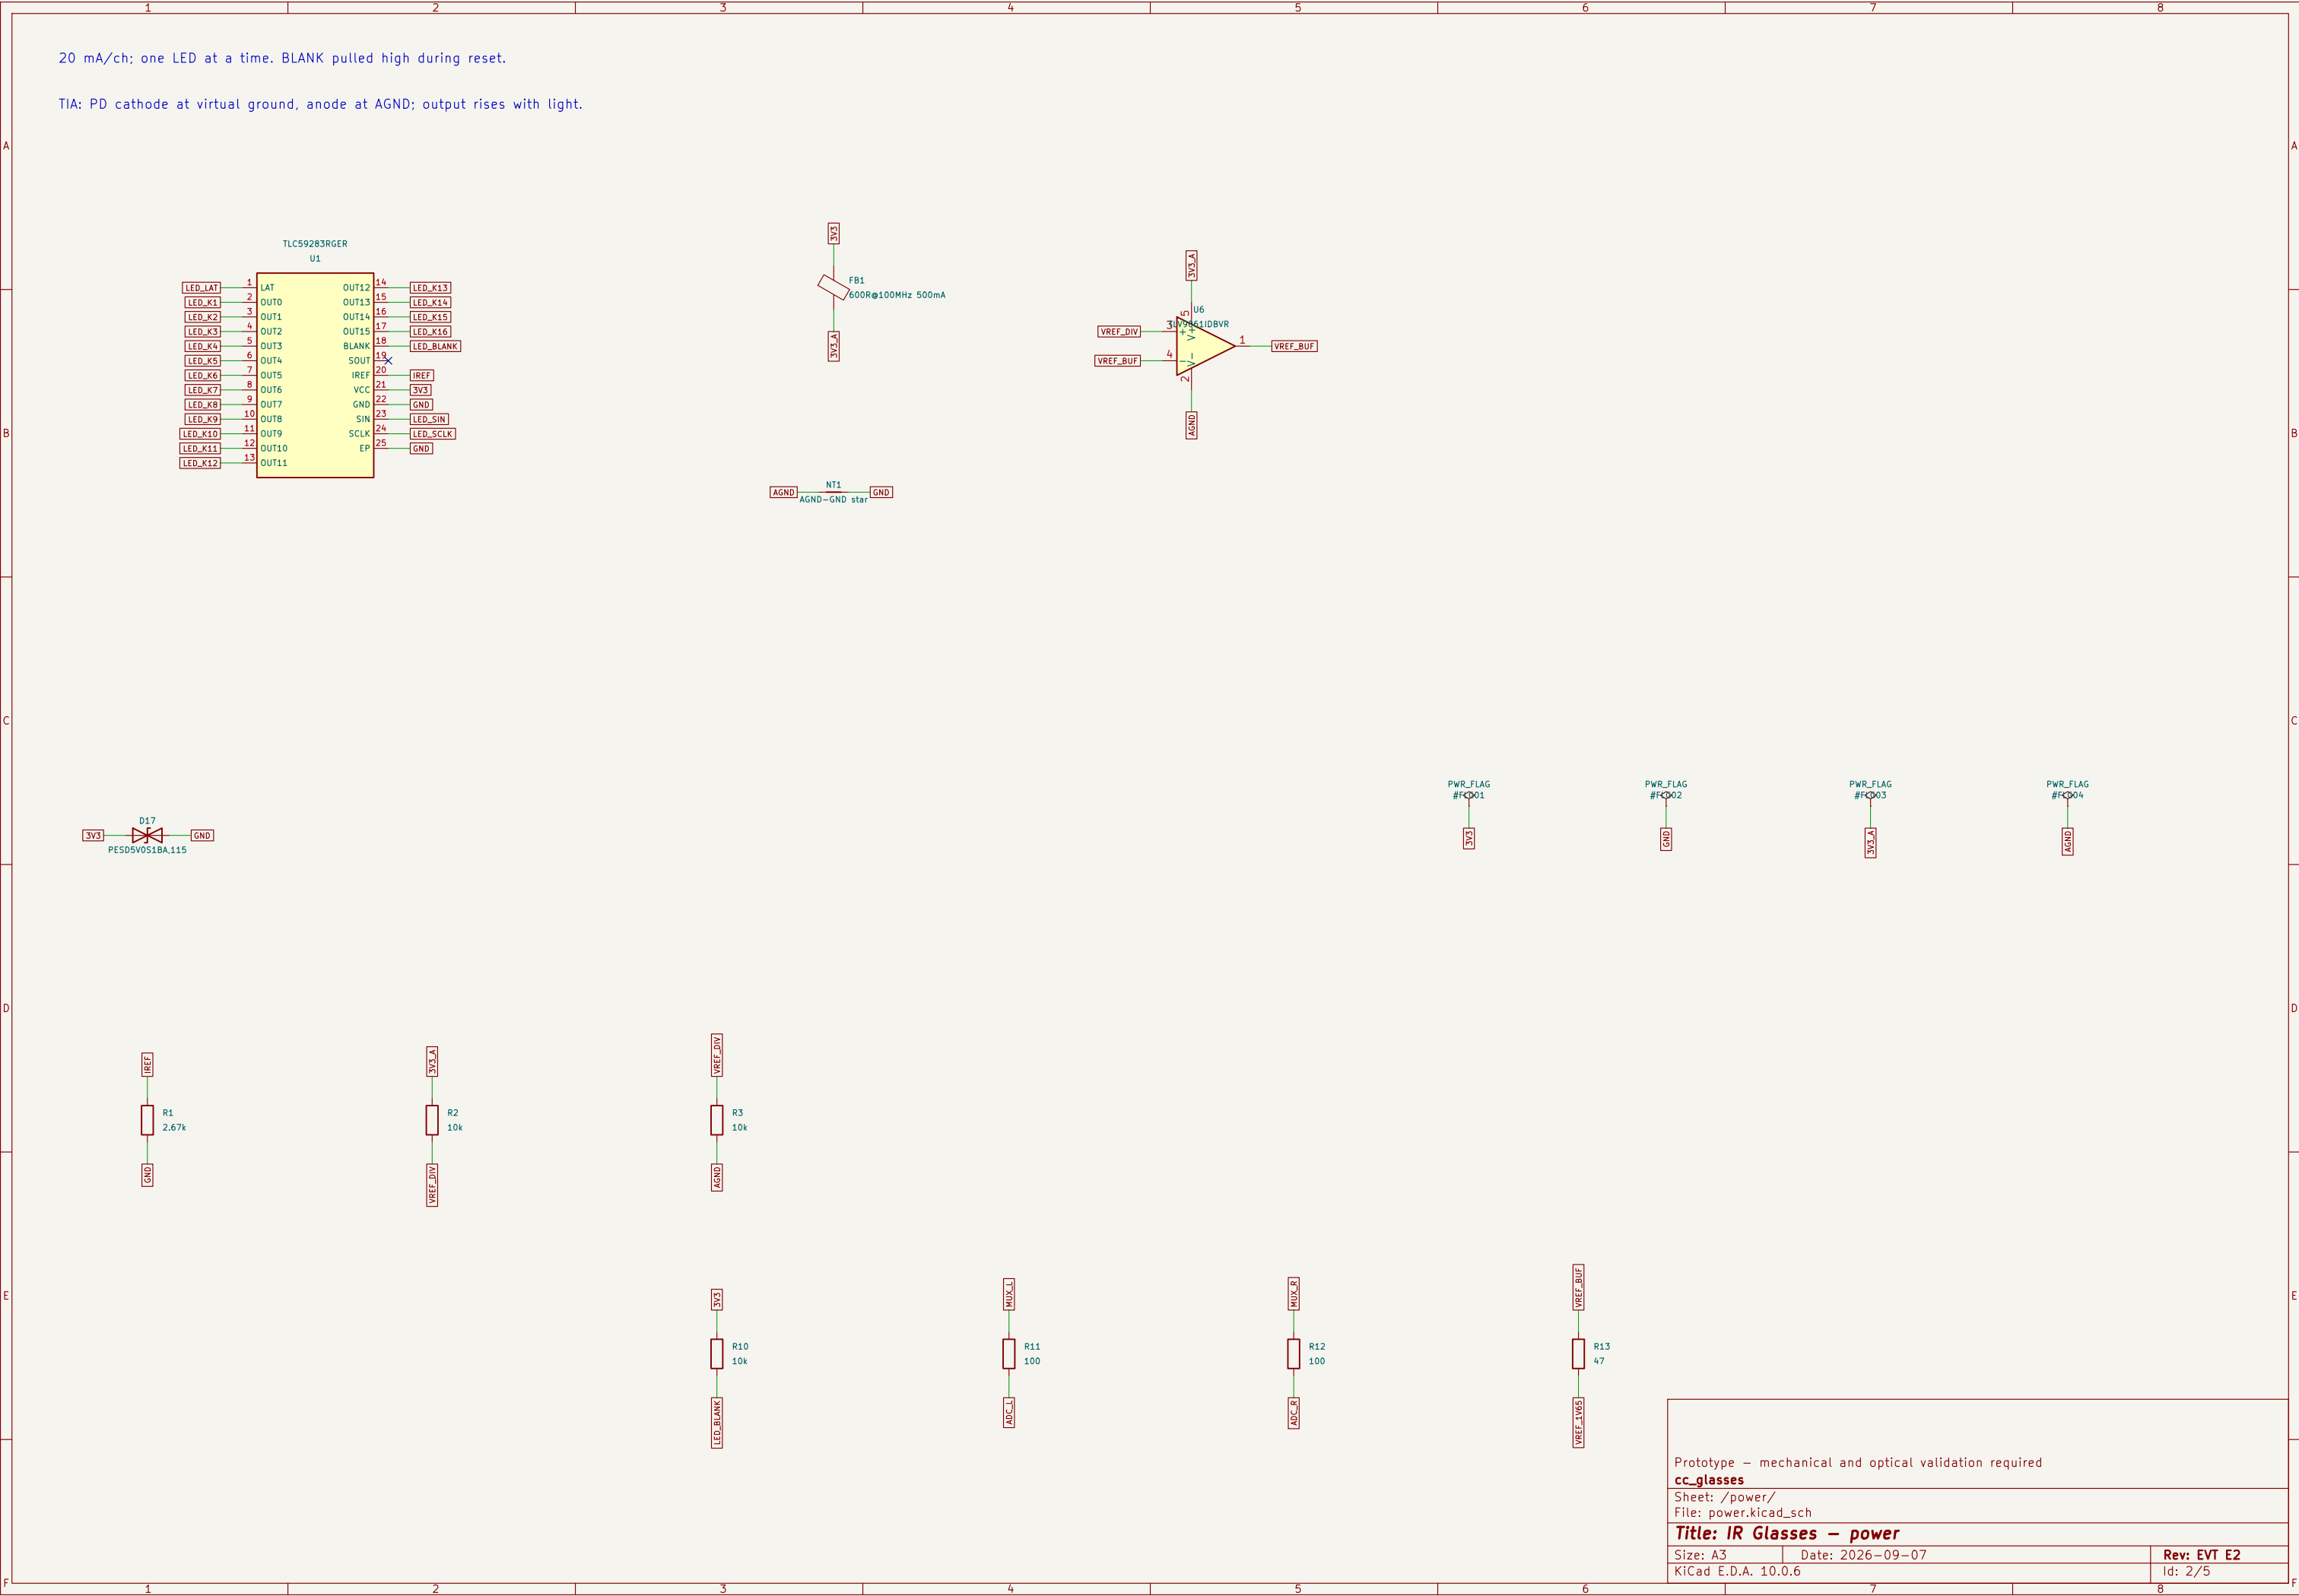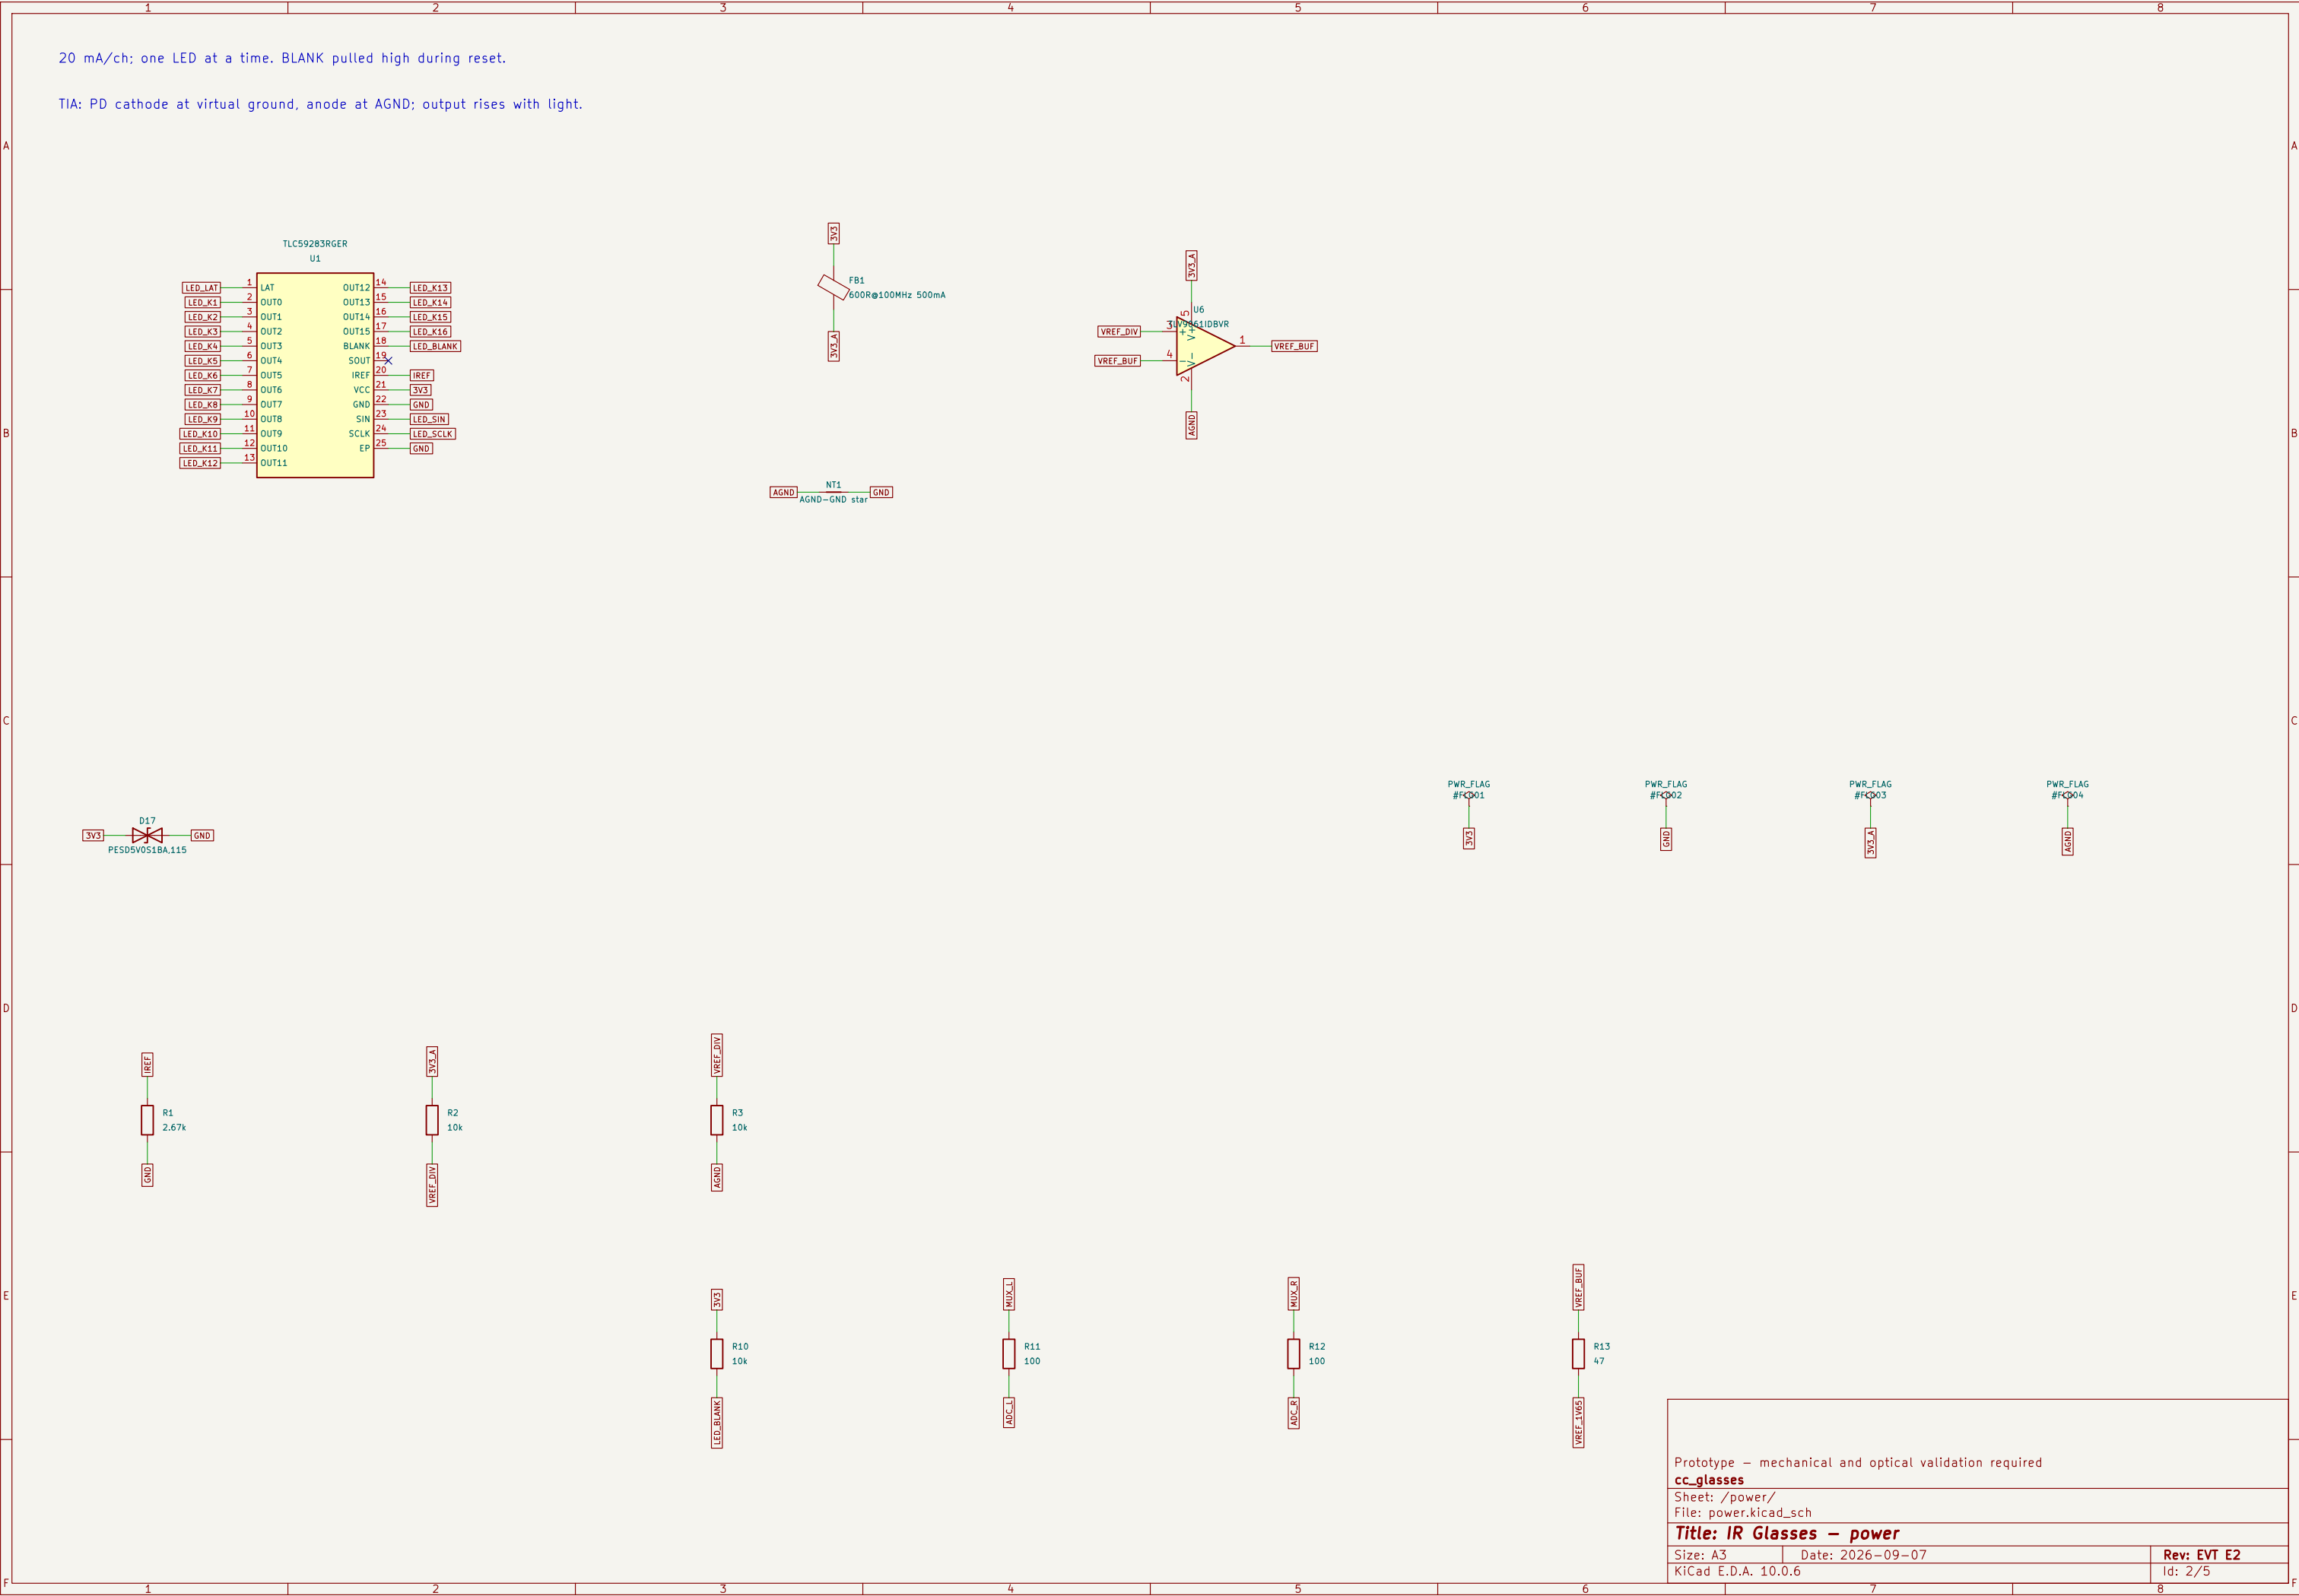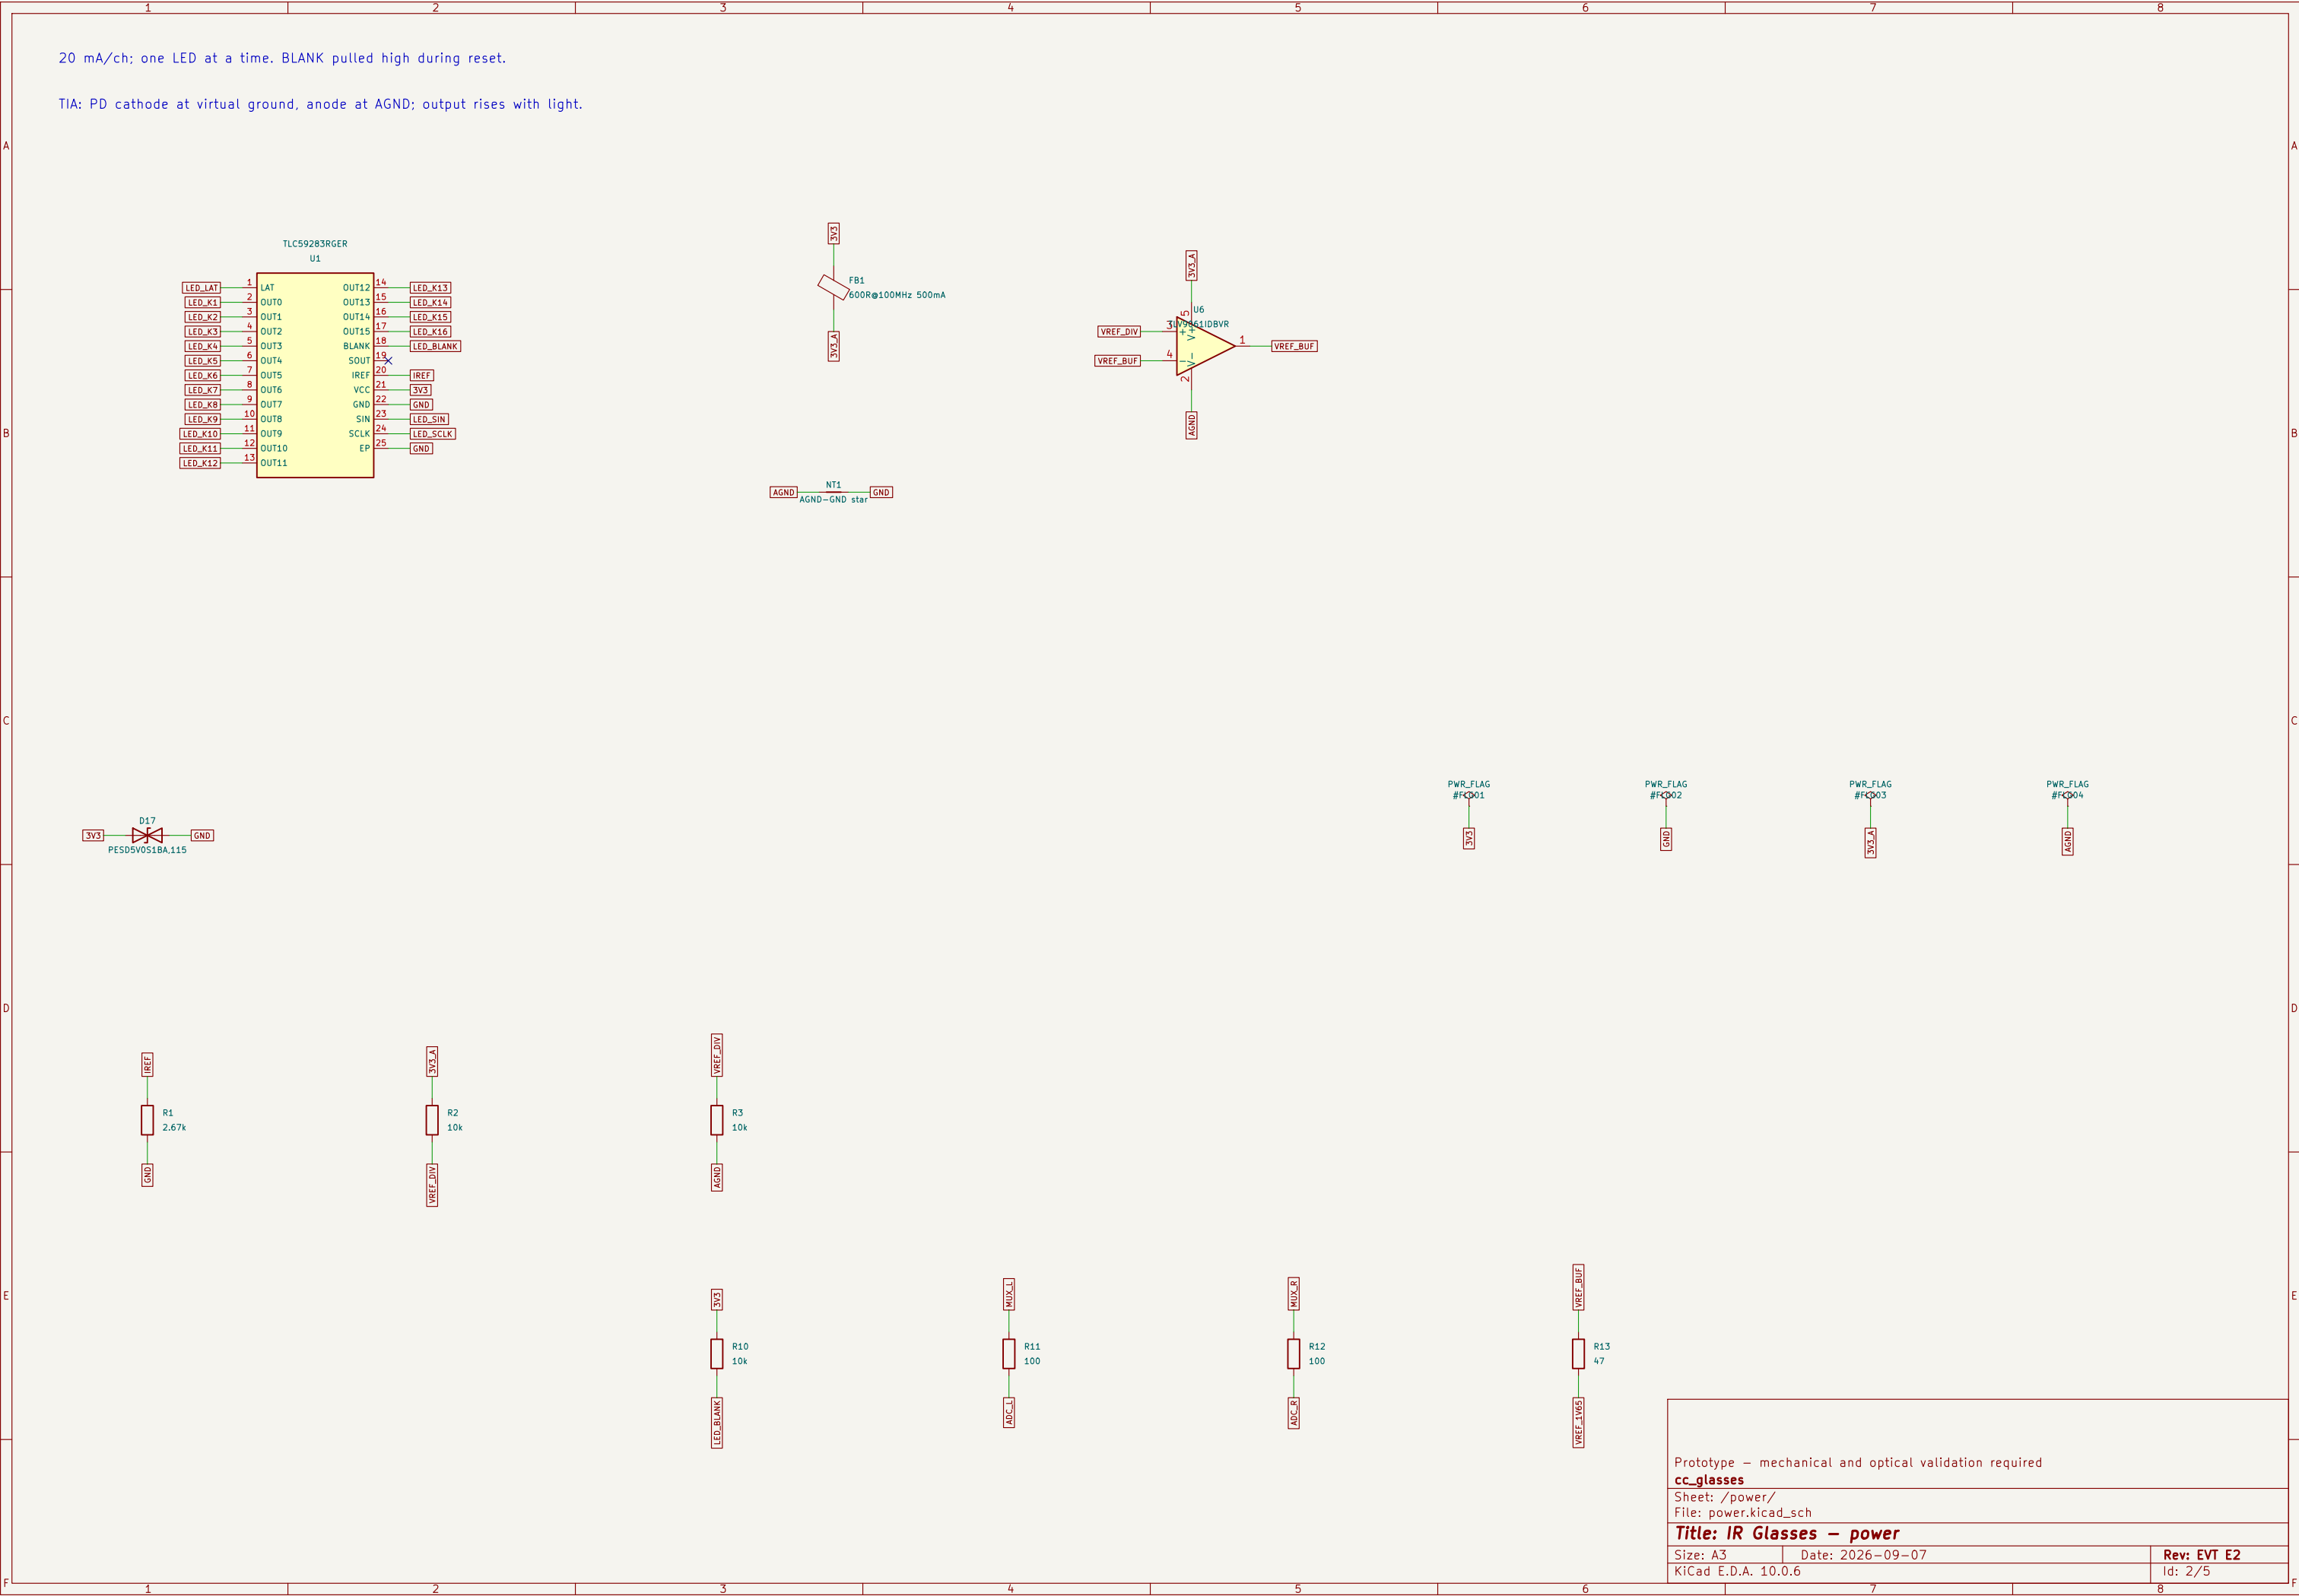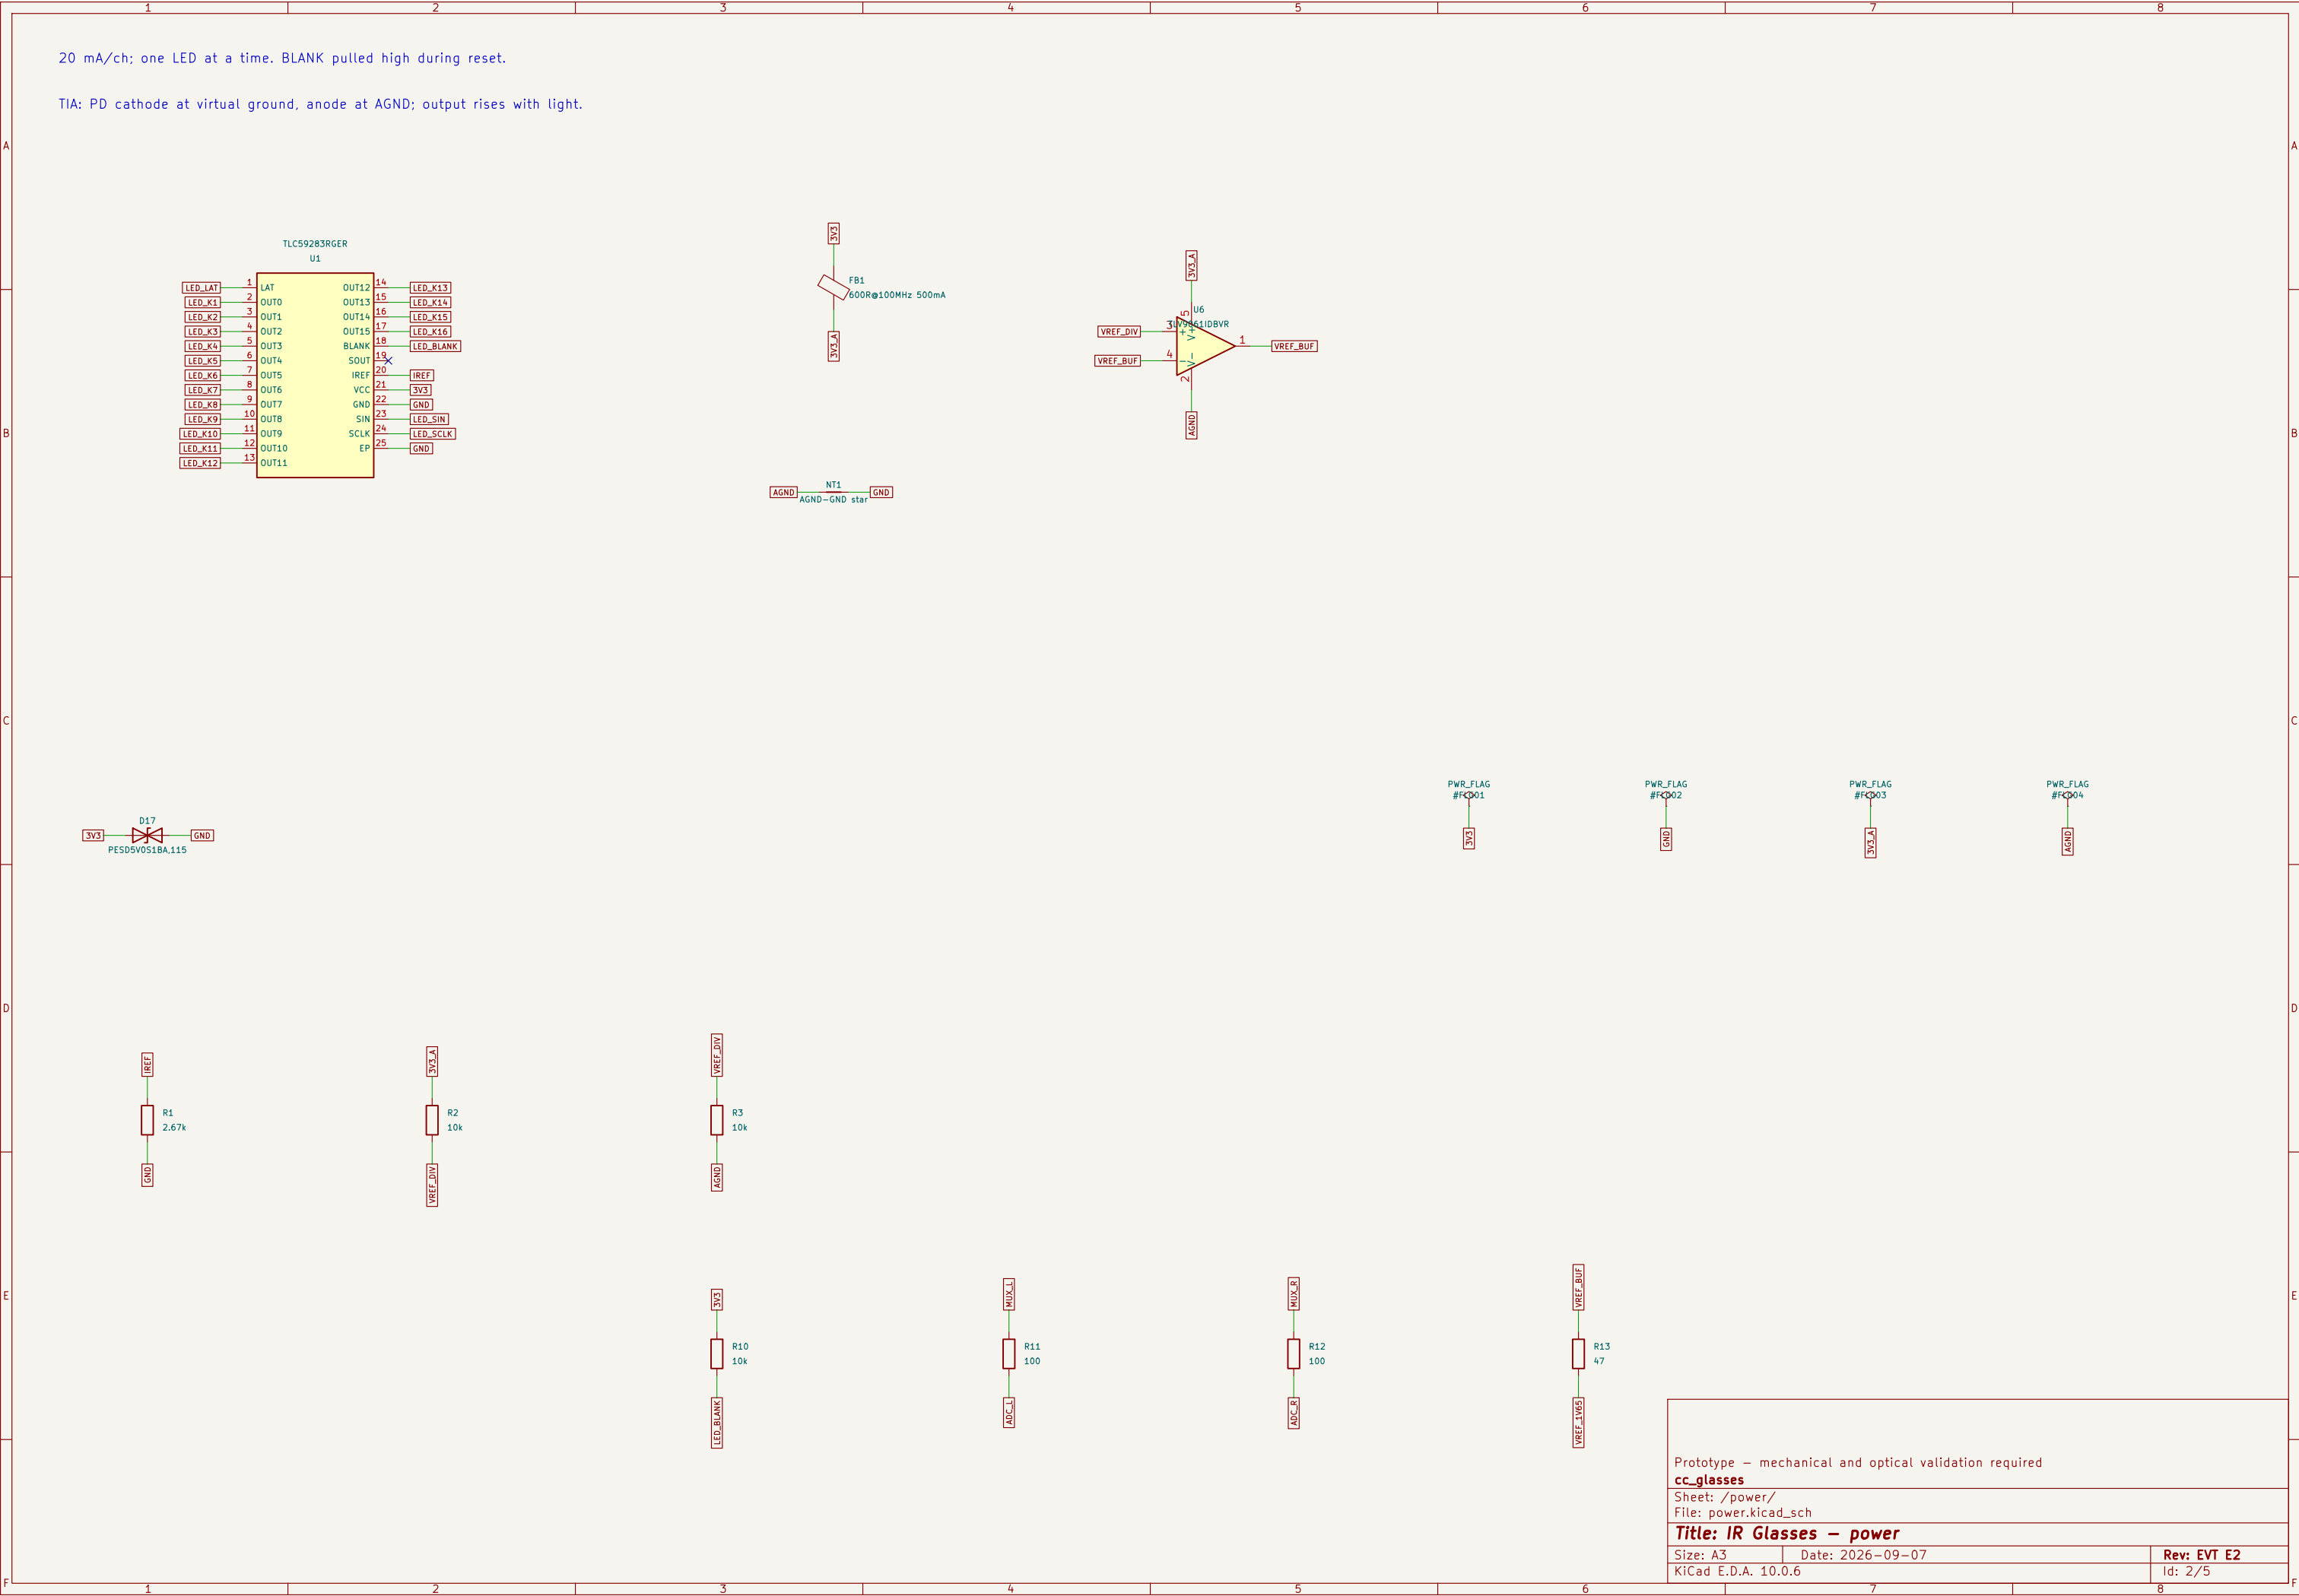


Id: 2/5


Receive opposite cell: 1→5, 2→6, 3→7, 4→8 (and reverse).

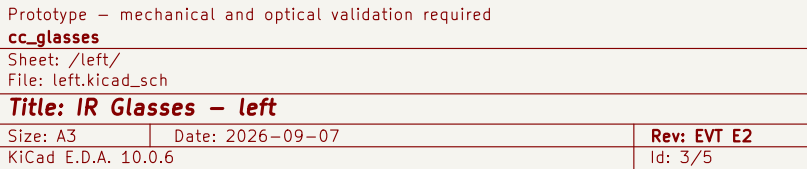

Receive opposite cell: 1→5, 2→6, 3→7, 4→8 (and reverse).

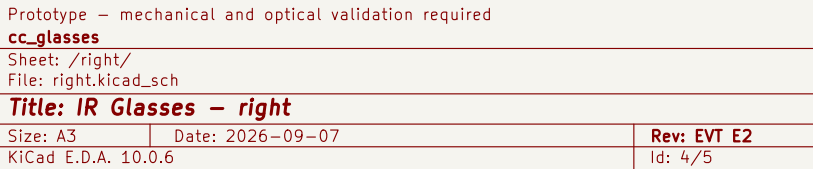

IR GLASSES EVT A – DECOUPLING

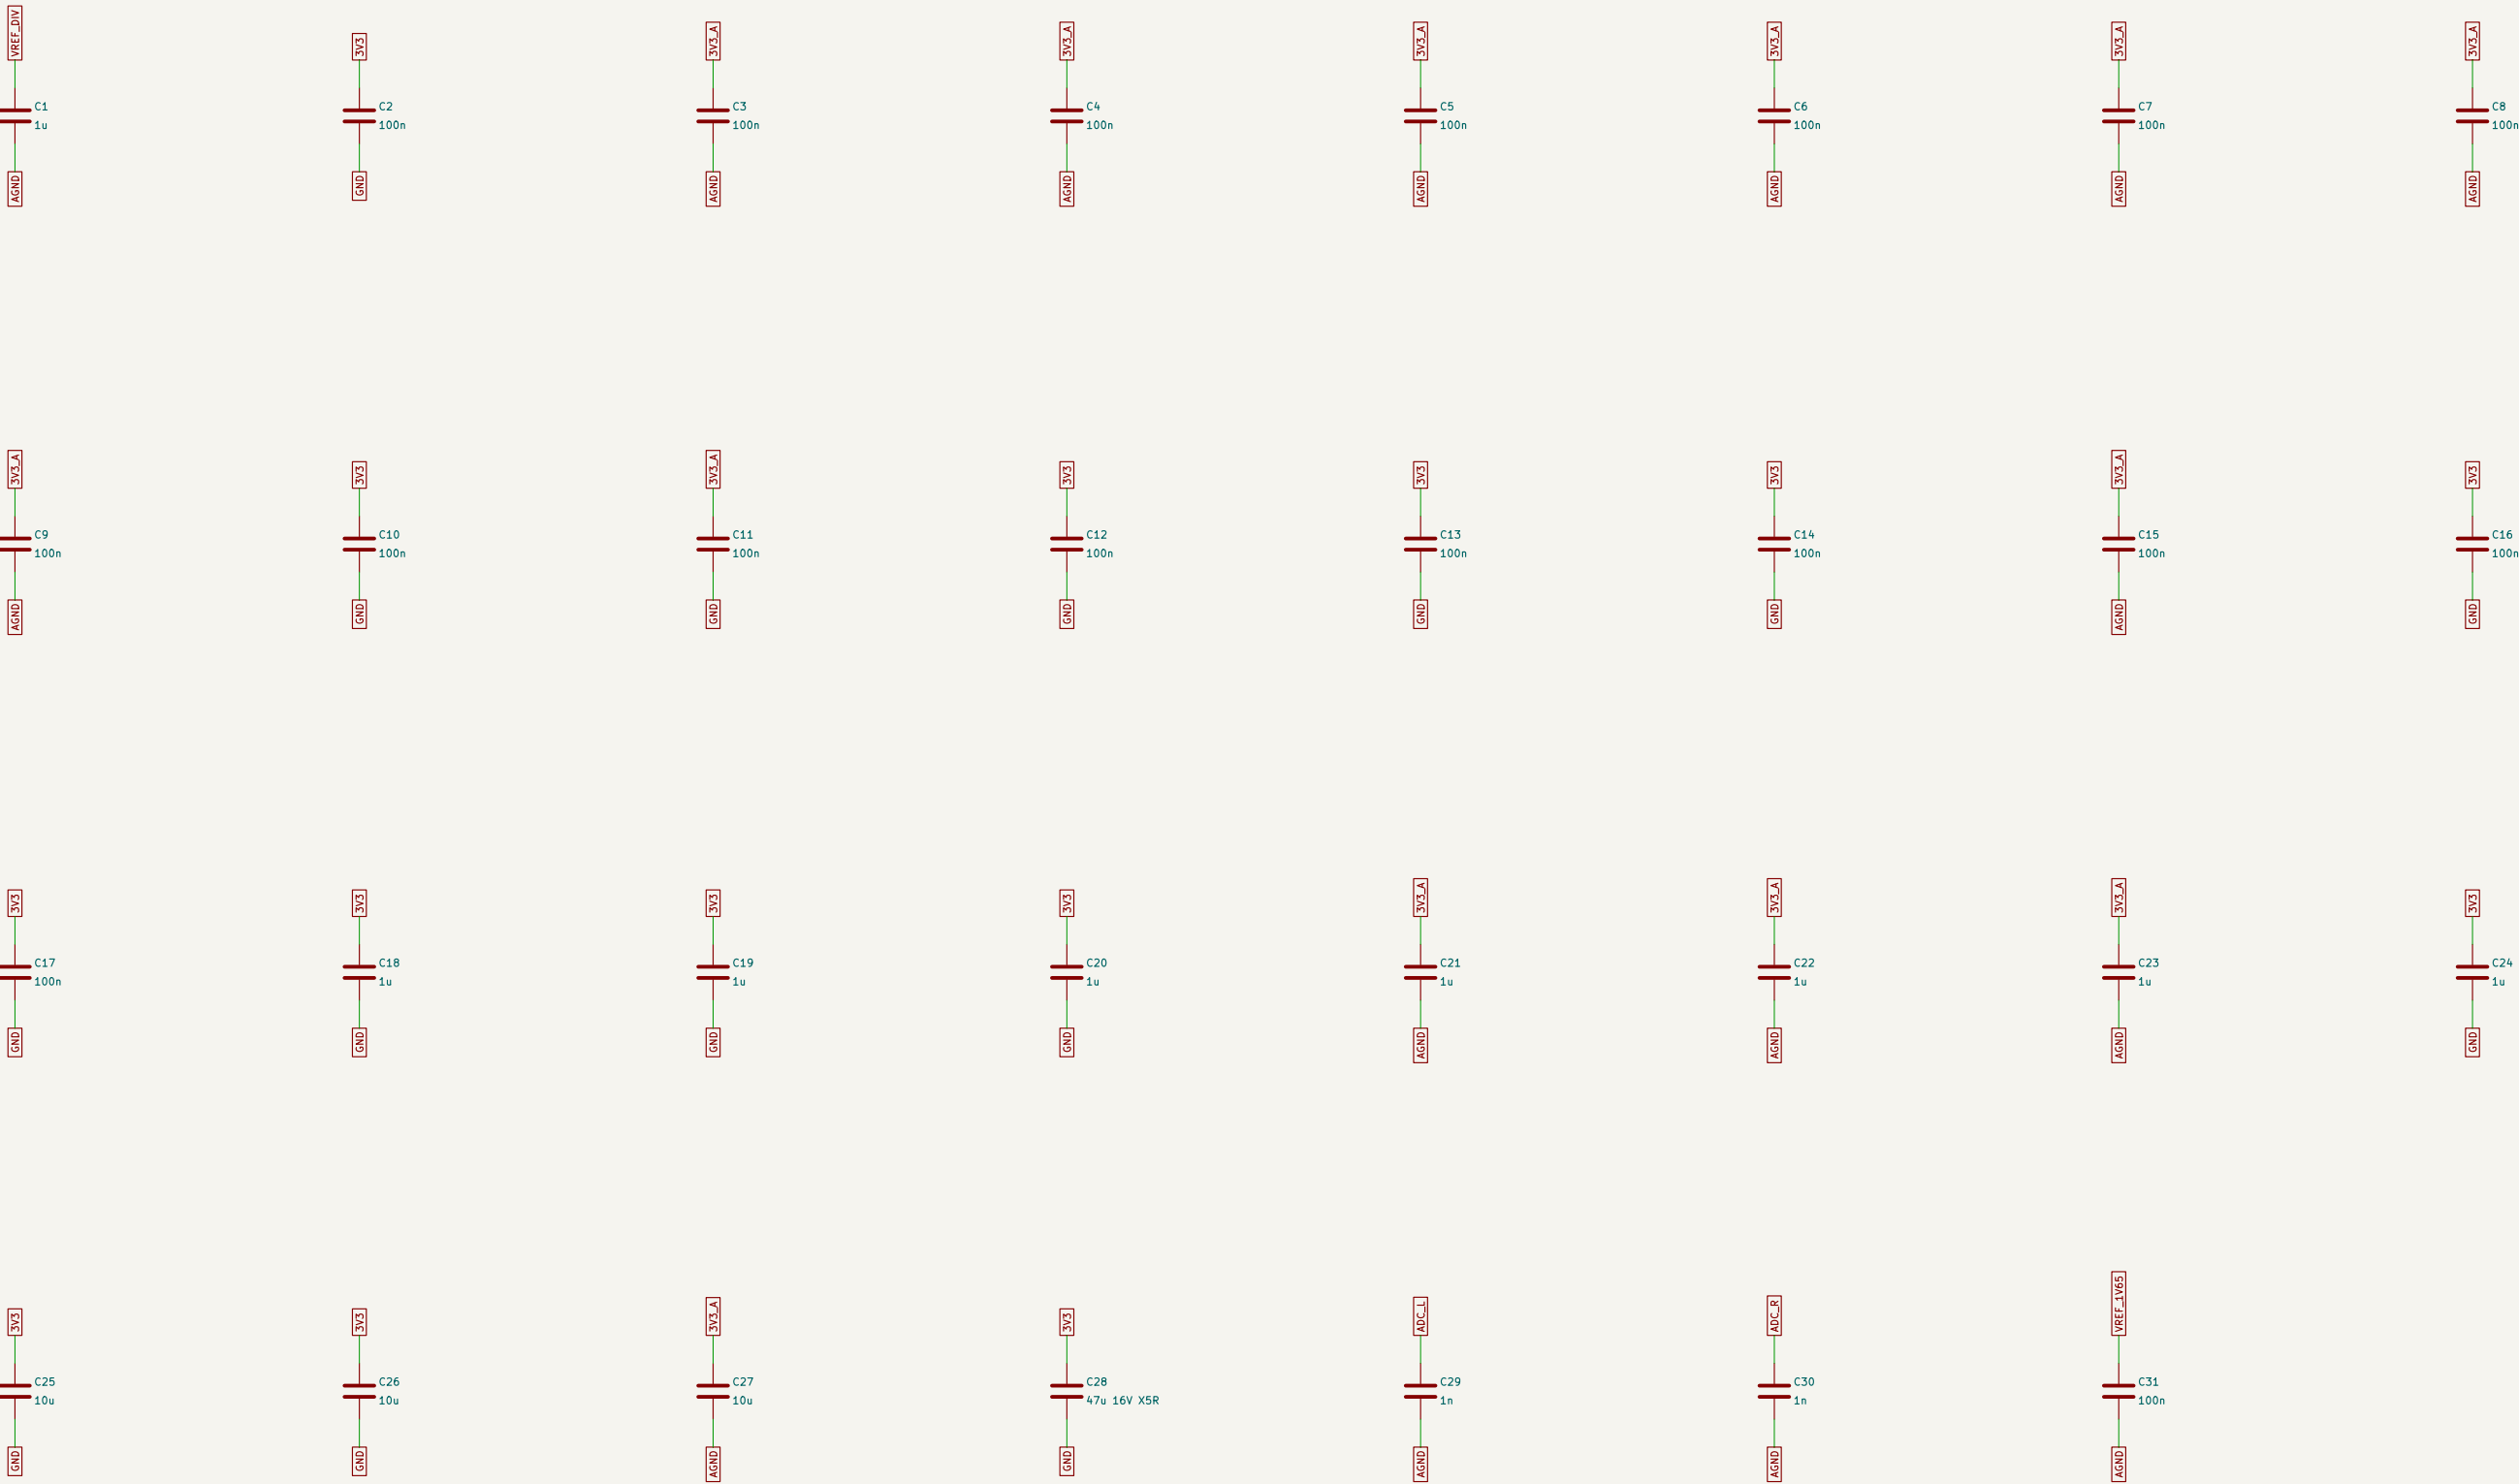

Prototype – mechanical and optical validation required
cc_glasses
Sheet: /decoupling/
File: decoupling.kicad_sch

Title: IR Glasses – decoupling

Size: A3	Date: 2026-09-07	Rev: EVT E2
KiCad E.D.A. 10.0.6		Id: 5/5