



IR GLASSES EVT A – CONTROL

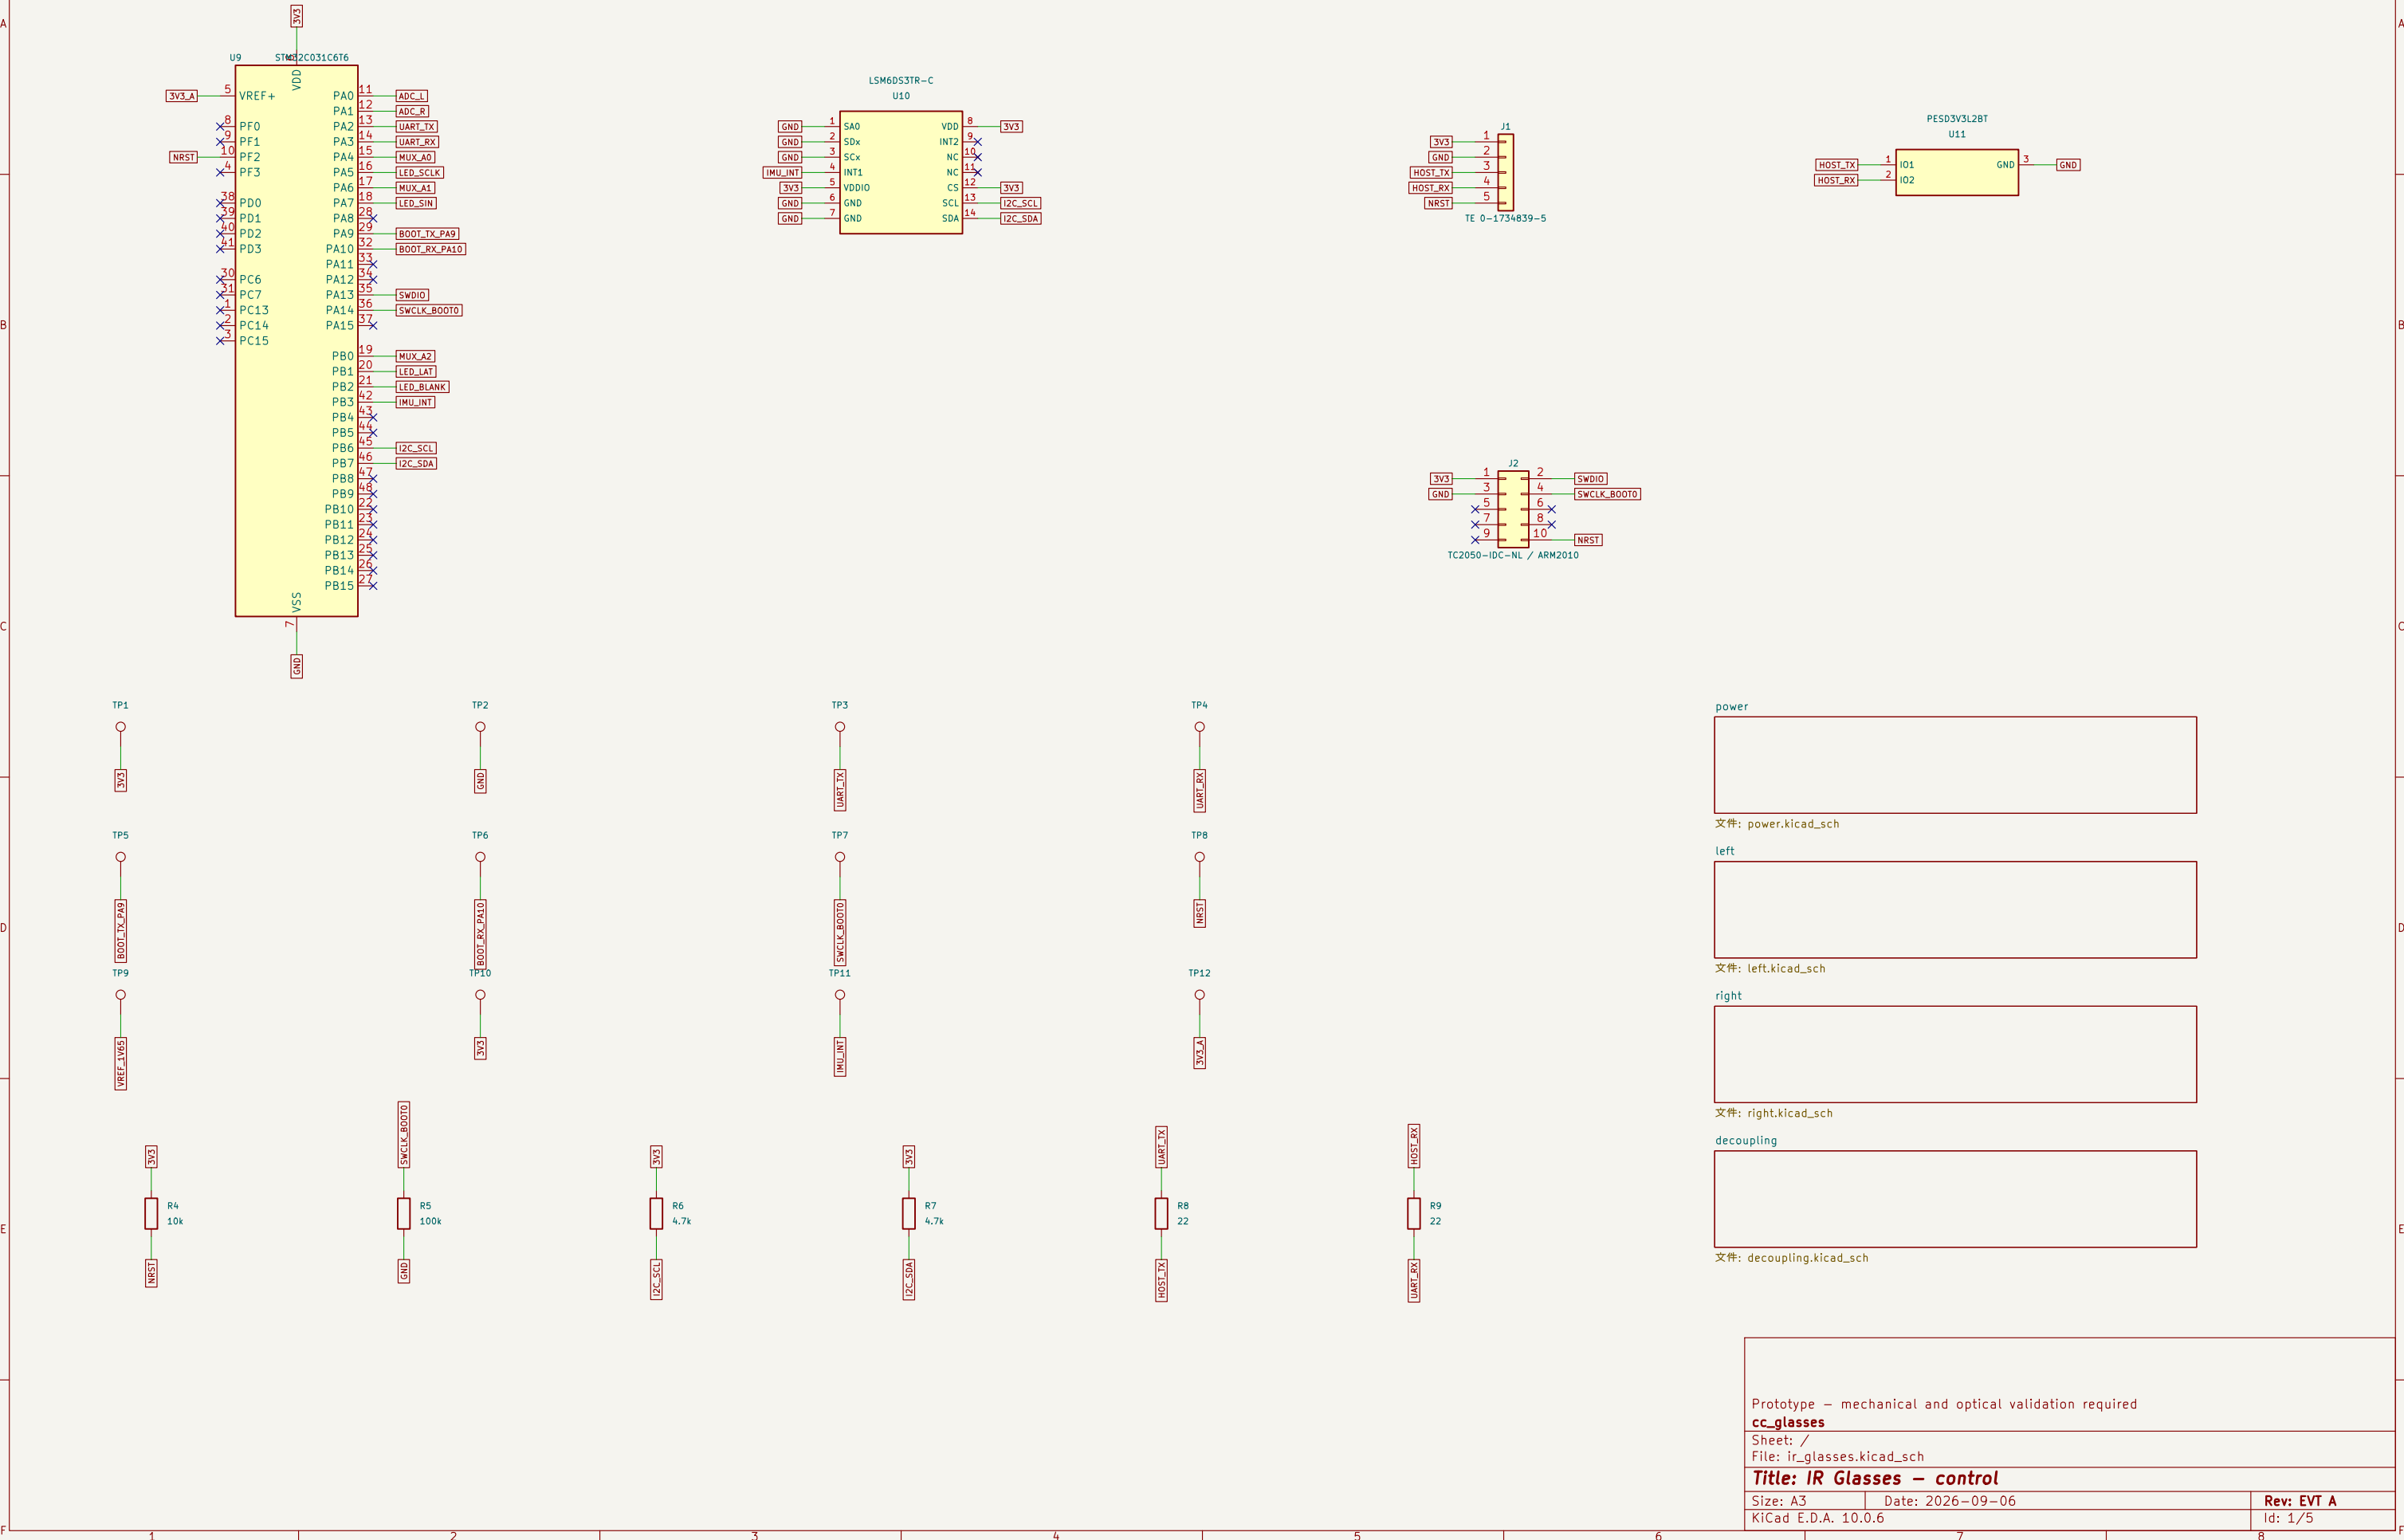

20 mA/ch; one LED at a time. BLANK pulled high during reset.

TIA: PD cathode at virtual ground, anode at AGND; output rises with light.

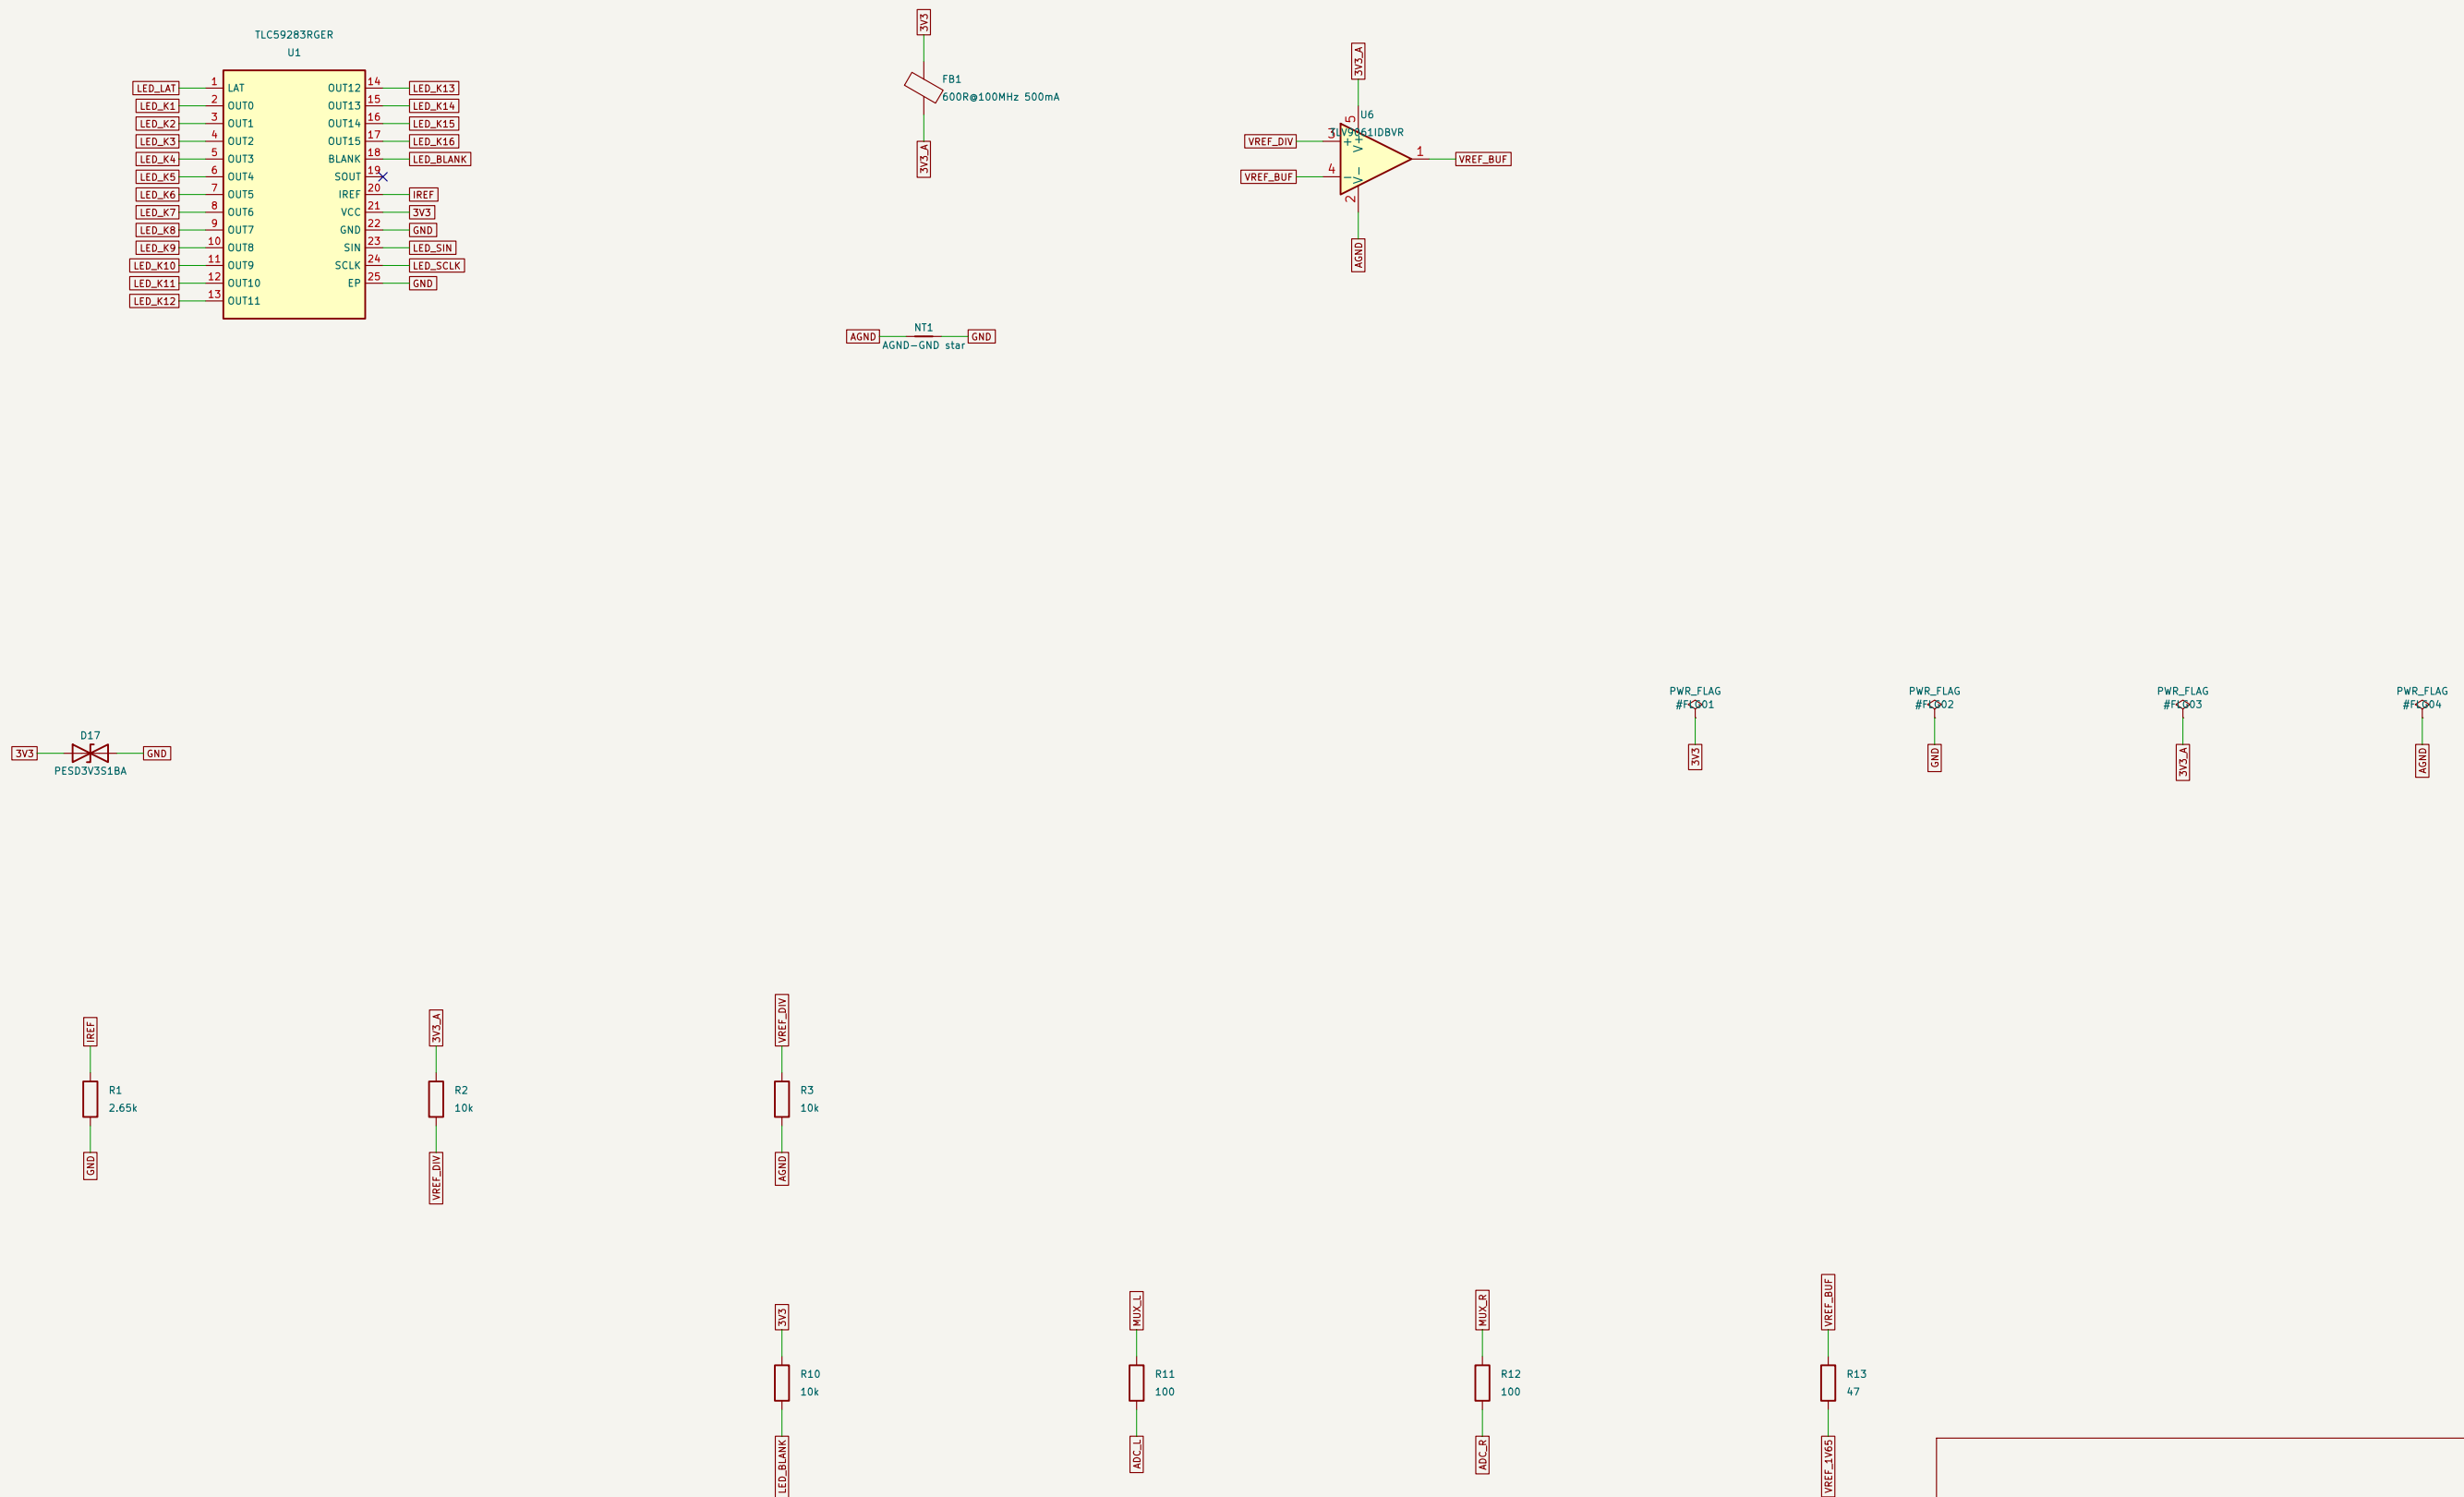

Prototype – mechanical and optical validation required

cc_glasses

Sheet: /power/

File: power.kicad_sch

Title: IR Glasses – power

Size: A3

Date: 2026-09-06


Rev: EVT A

KiCad E.D.A. 10.0.6

Id: 2/5


LEFT EYE – 8 optical cells / 8 independent TIAs

Receive opposite cell: 1->5, 2->6, 3->7, 4->8 (and reverse).

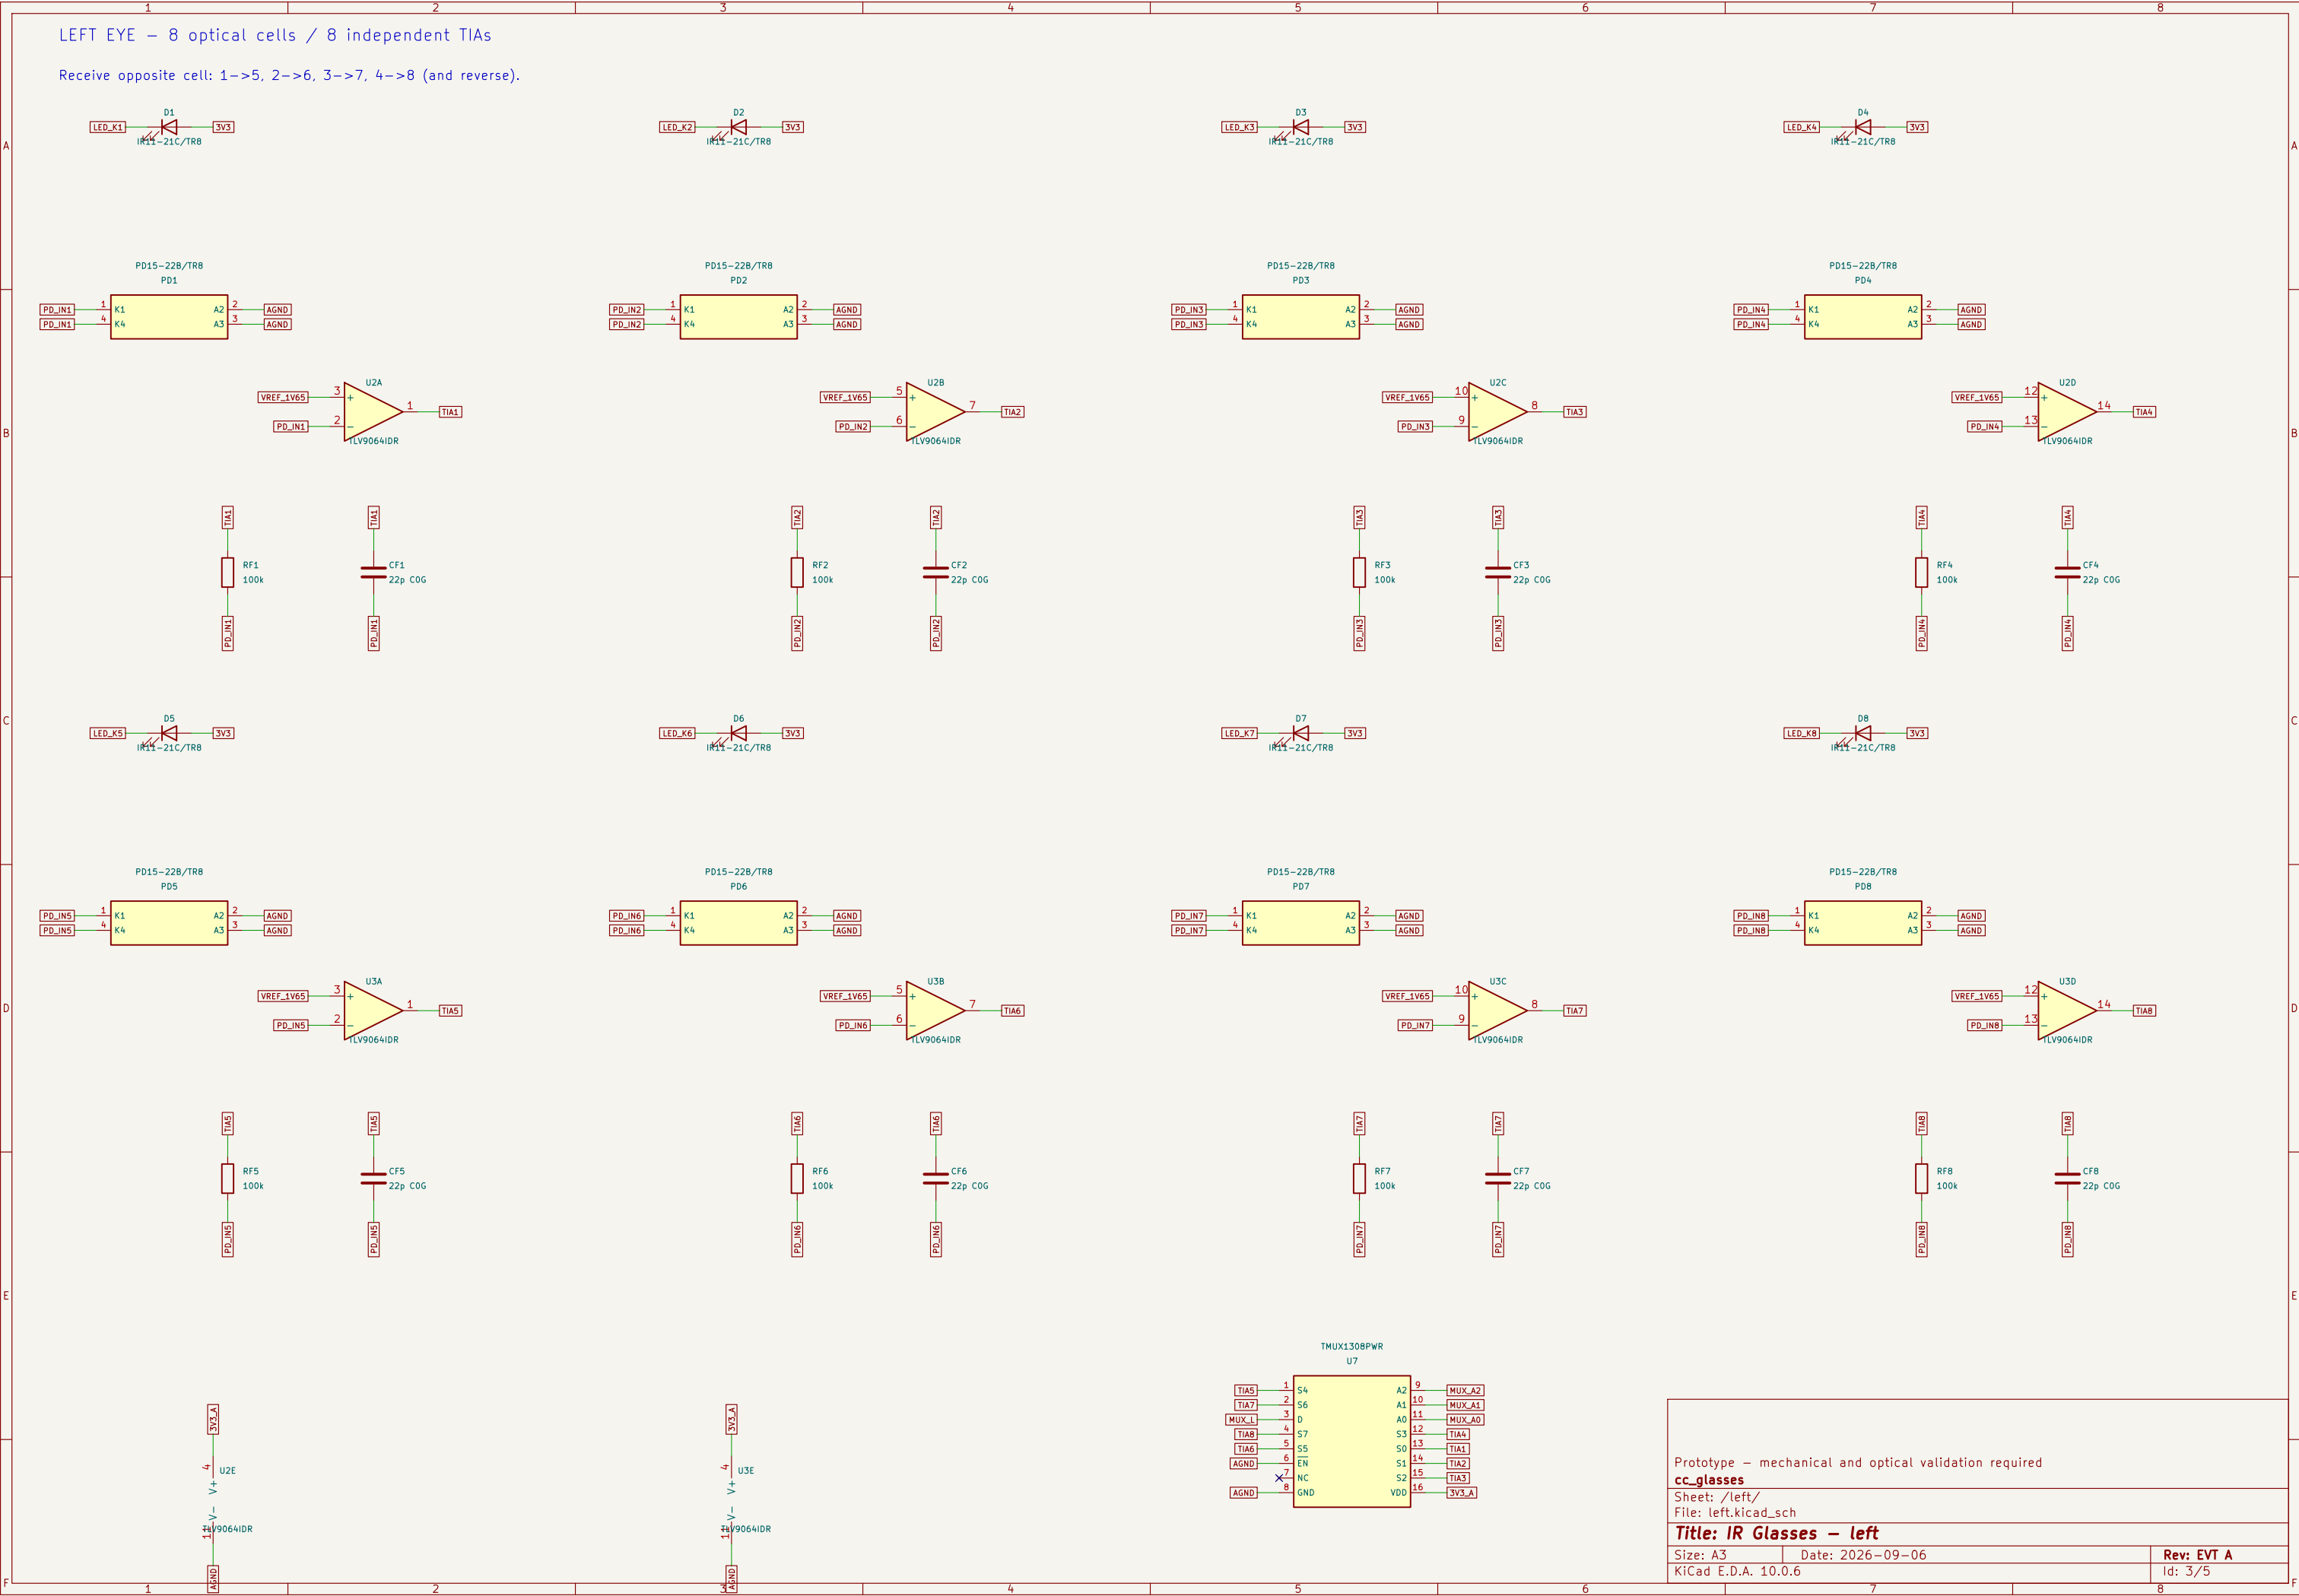

RIGHT EYE – 8 optical cells / 8 independent TIAs

Receive opposite cell: 1->5, 2->6, 3->7, 4->8 (and reverse).

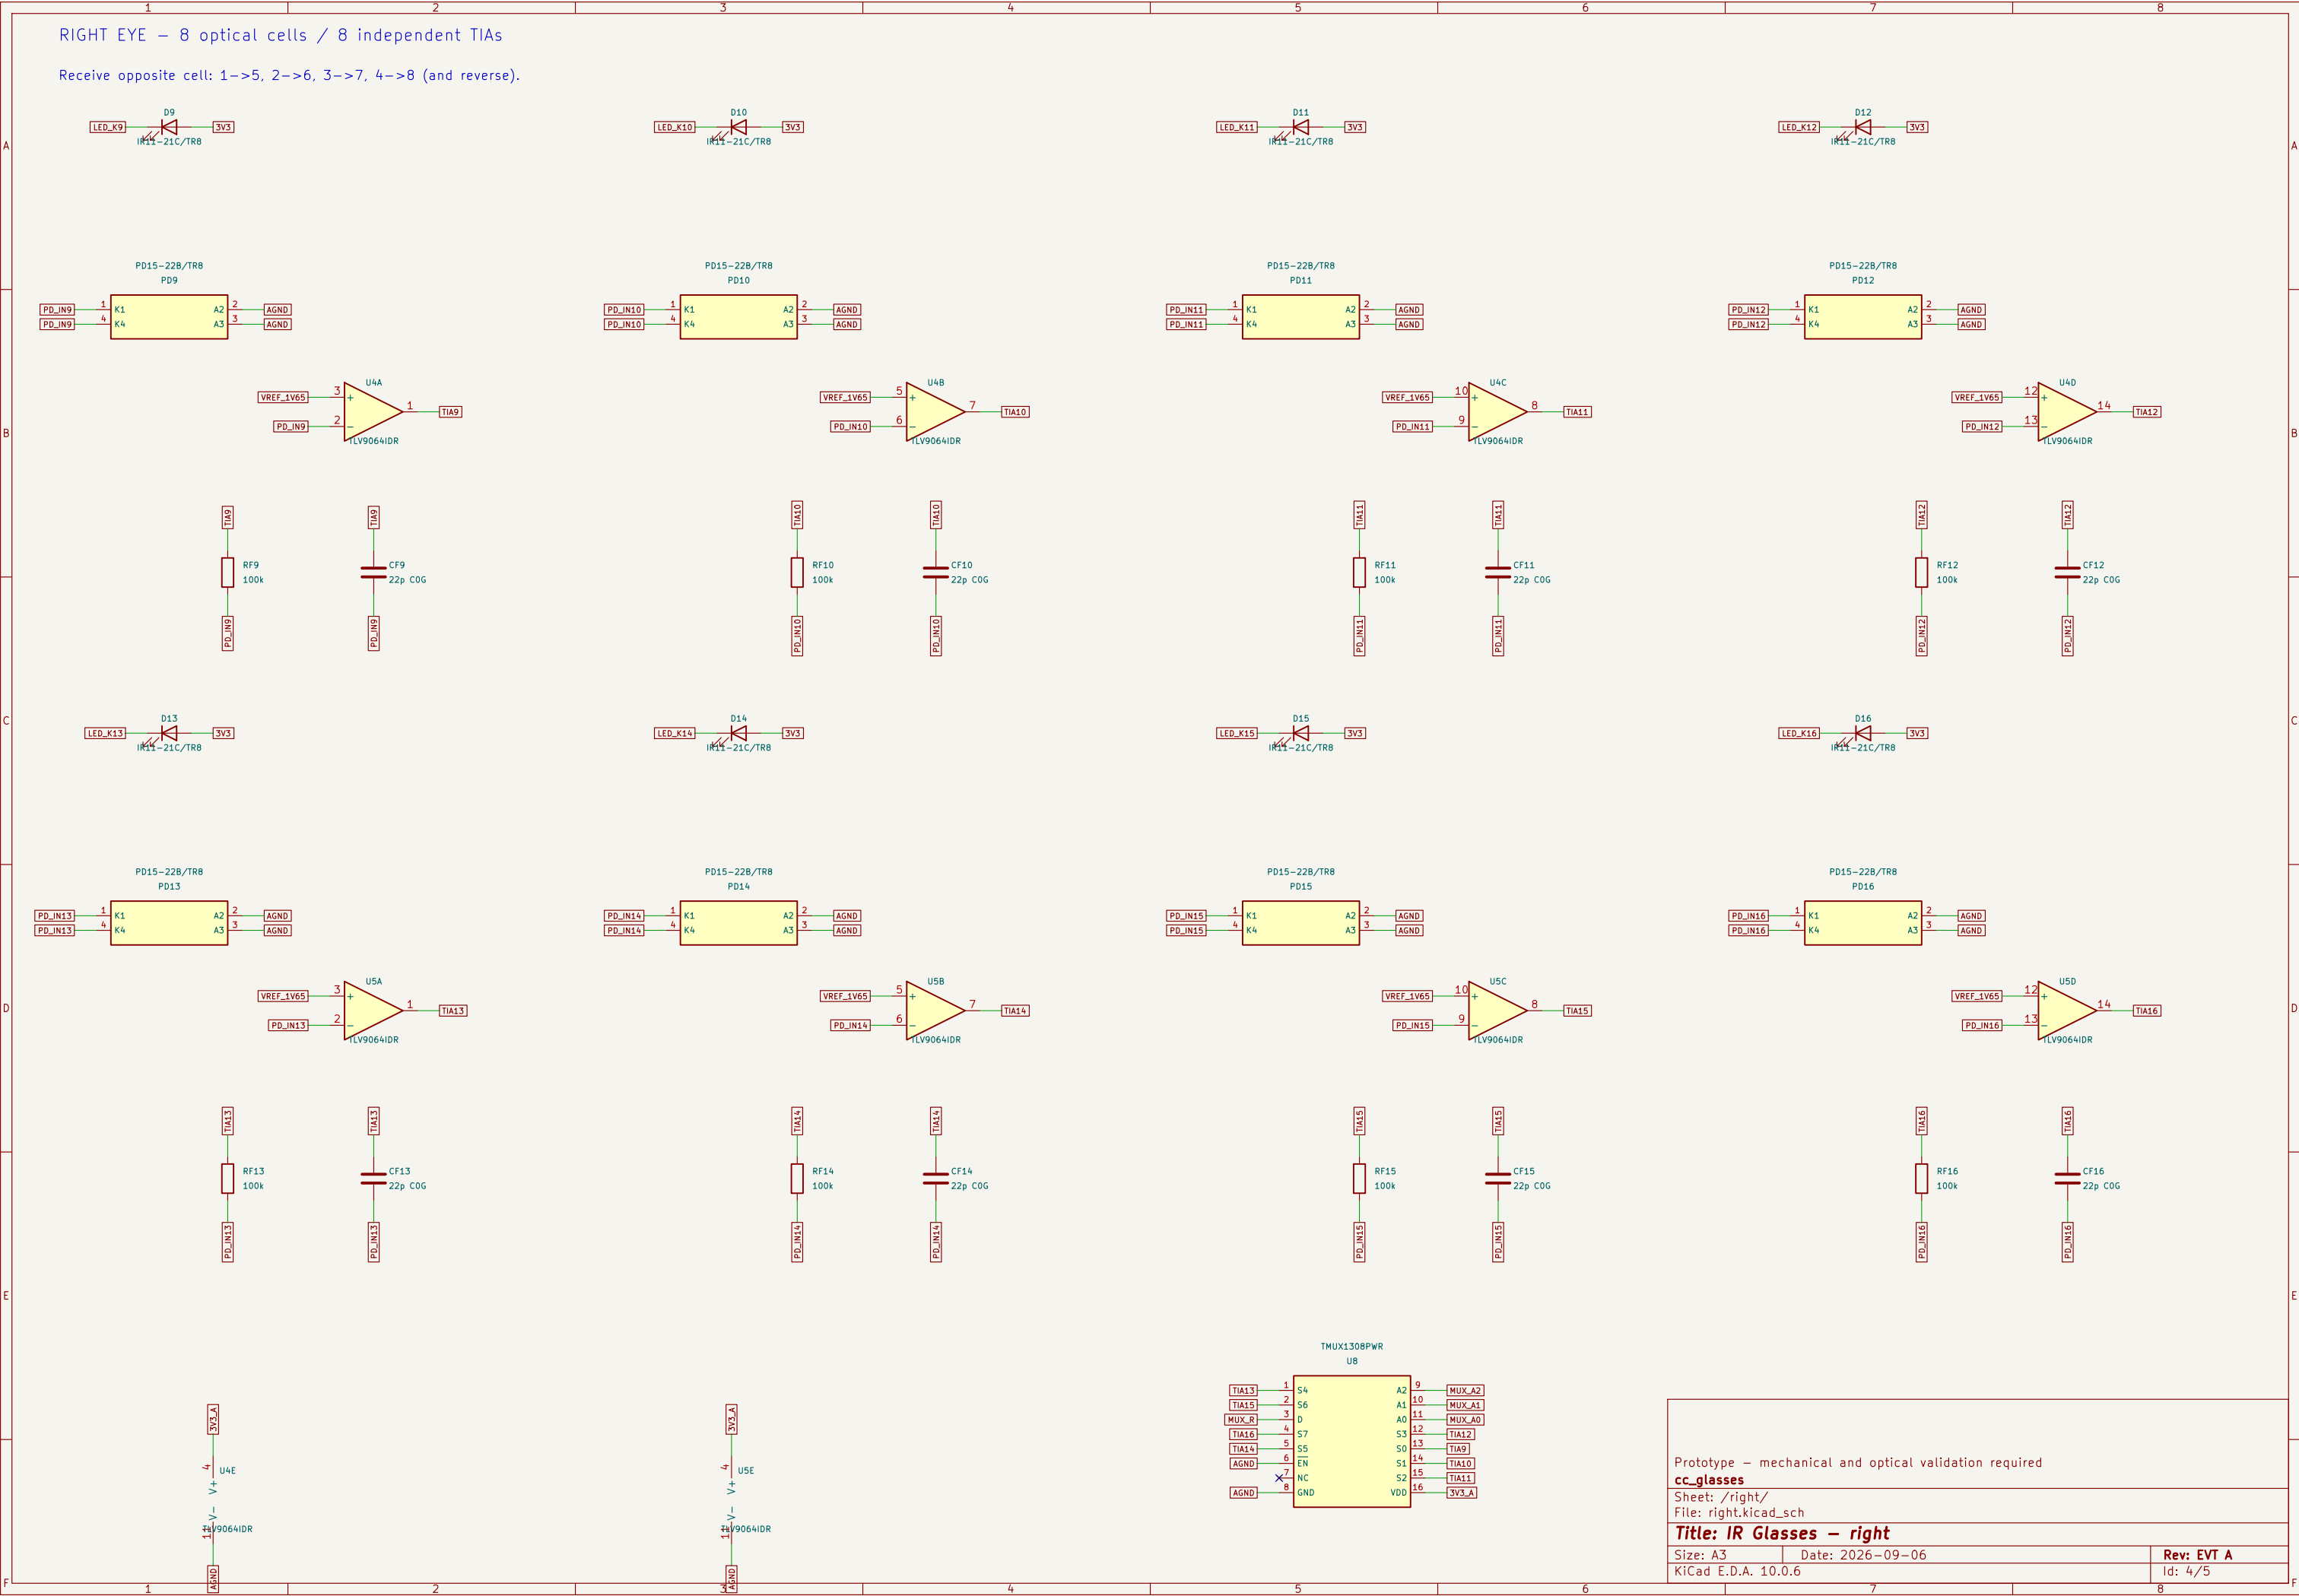

Prototype – mechanical and optical validation required

cc_glasses

Sheet: /right/

File: right.kicad_sch

Title: IR Glasses – right

Size: A3

Date: 2026-09-06

Rev: EVT A

KiCad E.D.A. 10.0.6

Id: 4/5

[illegible]

cc_glasses

File: decoupling.kicad_sch

Size: A3	Date: 2026-09-06	Rev: EVT A
----------	------------------	------------

Rev: EVT A

Id: 5/5