


EVT E6 / J1 connector and cable orientation

GUOCONN 0.5K-AS-5PWB-RW / C51901197 / front view / dimensions in mm

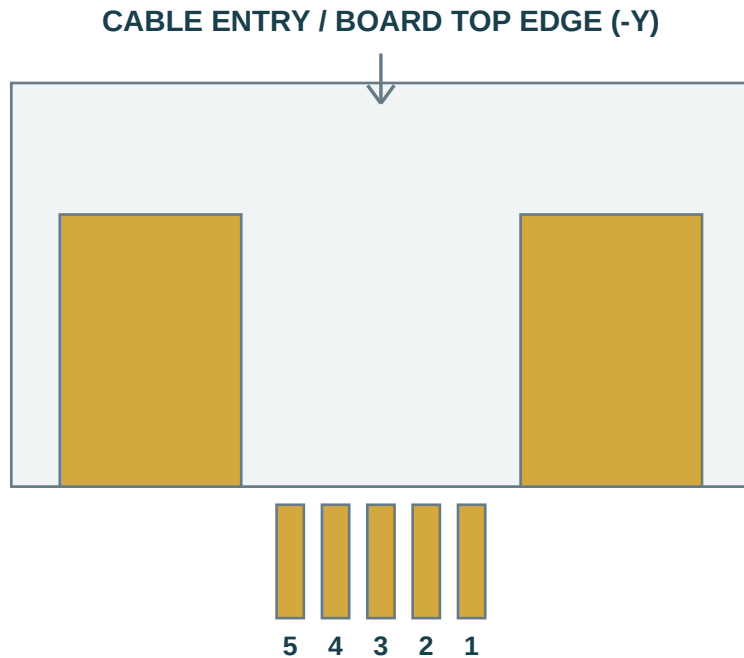

Pin 1 is the rightmost signal land in this front view.

Cable exposed copper faces the upper contacts.

Do not infer cable A/B type without the host connector.

- | | |
|---|--------------------|
| 1 | VIN_HOST |
| 2 | GND |
| 3 | HOST_TX / board RX |
| 4 | HOST_RX / board TX |
| 5 | NRST_EXT |

Signal lands: 0.30 x 1.25, pitch 0.50. Mechanical lands: 2.00 x 3.00.

J1 origin: X=165.000, Y=61.700, rotation 180 deg. Pin 1: X=166.000, Y=63.050.

Manufacturer drawing does not number contacts. Numbers above define this PCB cable contract.

Before power-on, continuity-check all five conductors through the actual host cable.

Rated current: 0.4 A/contact. U18 calculated continuous limit: 209-282 mA.

U18 precedes U14 and main capacitors. Input requirement: 3.3 V +/-3%, correct polarity.

C38=22nF; U19 controls U14 EN recovery. Inrush, short transients and cable require bench tests.

Working current acceptance budget <=150mA; inrush, connector drop and temperature require bench tests.