



FEATURES & SPECIFICATIONS

INTENDED USE — The CLX is a linear lighting solution that is available in multiple lengths, lumen packages and distributions. Designed for versatility, the CLX can address virtually any indoor lighting need. The CLX is also offered in standard and high efficacy configurations and capable of being continuous row mounted or installed as a stand-alone fixture. Ideal for uplight and downlight in commercial, retail, manufacturing, warehouse, and display applications. **Certain airborne contaminants can diminish the integrity of acrylic and/or polycarbonate.** [Click here for Acrylic-Polycarbonate Compatibility table for suitable uses.](#)

CONSTRUCTION — Channel and cover are formed from code-gauge cold-rolled steel. Housing and lens endcaps are injection molded plastic to provide a more architectural look and feel. The endcaps come standard with a 7/8" knock out for continuous mounting but can be ordered without.

Finish: Paint options include high-gloss, baked white polyester (WH), galvanized (GALV), matte black (MB) and smoke gray (SKGY). Five-stage iron phosphate pre-treatment ensures superior paint adhesion and rust resistance.

OPTICS — Offered with acrylic lens and less lens configurations. Provides a choice of optical distributions including, wide, narrow, and aisle.

Models with wide diffuse lens provide up to 12% uplight. Please check the IES file for specific uplight value.

ELECTRICAL — Utilizes high-output LEDs integrated on a two-layer circuit board, ensuring cool-running operation. Optional internal pluggable wiring harness for reduced labor cost in row mounting applications. (See PLR_ordering information on page 9.) Electronic LED driver is multi-volt input and 0-10V dimming standard (see Operational Data on page 6 for actual wattage consumption). This fixture is designed to withstand a maximum line surge of 2.5kV at 0.75kA combination wave for indoor locations, for applications requiring higher level of protection additional surge protection must be provided. Color Variation within 3-step MacAdam ellipse (3SDCM).

L70>100,000 hours at 25°C.

LEDs provide nominal 80 CRI or 90 CRI at 3000 K, 3500 K, 4000 K, or 5000 K.

Lumen output up to 2,500 lumens per foot.

INSTALLATION — Fixture may be ceiling or wall mounted (with or without THCLX hanger or angle mounted with CLXANGBKT), pendant or stem mounted with appropriate mounting options.

WARNING — Removing the lens and opening the fixture during installation exposes the LEDs, putting them at risk for damage.

If you plan to surface mount the fixture, we recommend using the THCLX. This eliminates the need to open the fixture.

If you plan to continuous row mount, we recommend using the PLR wiring harness option. This eliminates the need to open the fixture.

Damage to the LEDs caused during installation will not be covered under the warranty.

LISTINGS — CSA certified to US and Canadian safety standards. For use in damp locations between -4°F (-20°C) and 104°F (40°C). Optional High Ambient (HA) ranging to 122°F (50°C) available on certain lumen packages (See ambient temperature chart for additional information).

DesignLights Consortium® (DLC) Premium qualified product and DLC qualified product. Not all versions of this product may be DLC Premium qualified or DLC qualified. Please check the DLC Qualified Products List at www.designlights.org/QPL to confirm which versions are qualified.

GOVERNMENT PROCUREMENT — BAA — Product with the BAA option qualifies as a domestic end product under the Buy American Act as implemented in the FAR and DFARS. Product with the BAA option also qualifies as manufactured in the United States under DOT Buy America regulations.

BABA — Build America Buy America: Product with the BAA option also qualifies as produced in the United States under the definitions of the Build America, Buy America Act.

Please refer to www.acuitybrands.com/buy-american for additional information.

WARRANTY — 5-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: www.acuitybrands.com/support/warranty/terms-and-conditions

Note: Actual performance may differ as a result of end-user environment and application.

All values are design or typical values, measured under laboratory conditions at 25 °C.

Specifications subject to change without notice.

Stock configurations are offered for shorter lead times:

Stock Part Number	UPC
CLX L48 3000LM SEF FDL MVOLT GZ10 40K 80CRI WH	00191723525816
CLX L48 3000LM SEF FDL MVOLT GZ10 50K 80CRI WH	00191723525885
CLX L48 5000LM SEF FDL MVOLT GZ10 40K 80CRI WH	00191723525939
CLX L48 5000LM SEF FDL MVOLT GZ10 50K 80CRI WH	00191723525908
CLX L96 6000LM SEF FDL MVOLT GZ10 40K 80CRI WH	00191723525861
CLX L96 6000LM SEF FDL MVOLT GZ10 50K 80CRI WH	00191723525915
CLX L96 10000LM SEF FDL MVOLT GZ10 40K 80CRI WH	00191723525922
CLX L96 10000LM SEF FDL MVOLT GZ10 50K 80CRI WH	00191723525830
CLX L48 3000LM SEF RDL MVOLT GZ10 40K 80CRI WH	00191723525960
CLX L48 3000LM SEF RDL MVOLT GZ10 50K 80CRI WH	00191723525892
CLX L48 5000LM SEF RDL MVOLT GZ10 40K 80CRI WH	00191723525854
CLX L48 5000LM SEF RDL MVOLT GZ10 50K 80CRI WH	00191723525946
CLX L96 6000LM SEF RDL MVOLT GZ10 40K 80CRI WH	00191723525878
CLX L96 6000LM SEF RDL MVOLT GZ10 50K 80CRI WH	00191723525823
CLX L96 10000LM SEF RDL MVOLT GZ10 40K 80CRI WH	00191723525953
CLX L96 10000LM SEF RDL MVOLT GZ10 50K 80CRI WH	00191723525847

Catalog Number	
Notes	
Type	

LED Linear

CLX



Flat Diffuse Lens



Round Diffuse Lens



Wide Diffuse Lens



CLX with Reflector



CSA+ Capable Luminaire

This item is an A+ capable luminaire, which has been designed and tested to provide consistent color appearance and out-of-the-box control compatibility with simple commissioning when used with Acuity Brands controls products.

All configurations of this luminaire are calibrated and tested to meet the Acuity Brands' specifications for chromatic consistency — including color rendering, color fidelity, and color temperature tolerance around standard CIE chromaticity coordinates.

To learn more about Acuity A+ standards, specifications, and testing visit www.acuitybrands.com/aplus.



Items marked by a shaded background qualify for the Design Select program and ship in 15 days or less. To learn more about Design Select, visit www.acuitybrands.com/designselect.

*See ordering tree for details

CLX LED Linear



Design Select options indicated by this color background.

ORDERING INFORMATION

Lead times will vary depending on options selected. Consult with your sales representative.

Example: CLX L48 5000LM SEF WDL MVOLT GZ10 40K 80CRI WH

Series	Length	Nominal lumens	Performance package	Louver	Lens
CLX LED linear	L24 24"	1500LM 2000LM 2500LM 3500LM 4500LM 5000LM	SEF Standard efficiency ‡ HEF Premium efficiency ‡	(Blank) Less louver SBLW Straight blade louver, white ‡ SBLMB Straight blade louver, matte black ‡ SBLGV Straight blade louver, galvanized ‡ SBLSKGY Straight blade louver, smoke gray ‡	L/Lens Less lens FDL Flat diffuse ‡ RDL Round diffuse ‡ WDL Wide diffuse ‡
	L36 36"	2250LM 3000LM 3750LM 5250LM 6750LM 7500LM			
	L48 48"	3000LM 4000LM 5000LM 7000LM 7,000 lumens 9000LM 10000LM			
	L96 96"	6000LM 8000LM 10000LM 14000LM 18000LM 20000LM			

Distribution	Voltage	Driver ‡	Glare Reflector	Color temperature	Coloring rendering index
(Blank) General	MVOLT 120-277V ‡	277 277V	GZ1 Generic 0-10V, dims to 1% ‡	(blank) No reflectors	30K 3000 K
ND Narrow ‡	120 120V	347 347V ‡	GZ10 Generic 0-10V, dims to 10% ‡	LUGR Reflectors for additional glare reduction ‡	35K 3500 K
WD Wide ‡	208 208V ‡	480 480V ‡	EZ1 eldoLED 0-10V, dims to 1% ‡		40K 4000 K
AD2 Aisle, 24° off center ‡	240 240V ‡			50K 5000 K	80CRI 80 CRI
					90CRI 90 CRI

Options	Finish
PS1050 Emergency battery pack, 10W, CA Title 20 Noncompliant ‡	WH White
E10WLCP Emergency battery pack, 10W Linear Constant Power, Certified in CA Title 20 MAEDBS ‡	GALVW Galvanized with white lens end caps
E10STAR Emergency battery pack, Enabled with STAR ‡	GALVB Galvanized with black lens end caps
BGTD Generator transfer device, not available with PS1050 ‡	MB Matte black
OCS 5', 18/3 Reloc selectable One Pass cable (fixture will bear dry location label) ‡	SKGYW Smoke gray with white lens end caps
HA High ambient, for use in ambient temperatures up to 50°C ‡	SKGYB Smoke gray with black lens end caps
EPNKO Decorative endplate, no knock out ‡	
OUTCTR Wiring leads pulled through back center of fixture ‡	
OUTEND Wiring leads pulled through end of fixture ‡	
Cord Sets: ‡	
CS1W 6' Straight blade plug, 120V ‡	
CS3W NEMA twist-lock plug, 120V ‡	
CS7W Straight blade plug, 277V ‡	
CS11W NEMA twist-lock plug, 277V ‡	
CS25W NEMA twist-lock plug, 347V ‡	
CS97W NEMA twist-lock plug, 480V ‡	
CS93W 600V SOW white cord, no plug (no voltage required)	
CS6WG16STOWD5D 6' white cord, 16/5, no plug, includes low voltage dimming wires (no voltage required) ‡	
PLR__ Plug-in wiring, see page 9 for ordering information	nLight® Wired:
PLR16	nLight® without lumen management
PLR1LVG	nLight® without lumen management For use with generator supply EM power ‡
RRL__ RELOC®-ready luminaire. See page 14 for ordering information	
SPD Surge protection device, provides up to 6kV protection ‡	
BAA Buy America(n) Act and/or Build America Buy America Qualified	
nLight® Wireless:	
NLTAIR2 RES7	nLight AIR Generation 2 enabled PIR integral occupancy sensor with automatic dimming photocell ‡
NLTAIR2 RES7EM	nLight AIR Generation 2 enabled PIR integral occupancy sensor with automatic dimming photocell and UL924 Emergency operation, via power interrupt detection ‡
NLTAIR2 RES7PDT	nLight AIR Generation 2 enabled dual technology integral occupancy sensor with automatic dimming photocell ‡
NLTAIR2 RES7PDTEM	nLight AIR Generation 2 enabled dual technology integral occupancy sensor with automatic dimming photocell and UL924 Emergency operation, via power interrupt detection ‡
NLTAIR2 RIO	No sensor control ‡
NLTAIR2 RIOEM	No sensor, Control Input function only and UL924 Emergency operation, via power interrupt detection ‡
Individual controls: ‡	
MSD7 PIR integral occupancy sensor	
MSDPDT7 PDT 7 dual technology integral occupancy control	
MSD7ADC PIR integral occupancy sensor with automatic dimming control photocell	
MSDPDT7ADC PDT integral occupancy sensor with automatic dimming control photocell	
	See Accessories and footnotes on next page

Accessories: Order as separate catalog number.

Mounting:	SQ_	Swivel stem hanger (specify length in 2" increments up to 48") Ships White
ZACVH M100	THCLX __	Tong hanger (Must specify color) (one pair) ‡
ZAC120	CLXANGBKT __	Angle bracket, (Must specify color) (one pair) ‡
ZACFP120	HC36 M12	Hanger chain, 36" (1 pair)
ZACFPD120		
ZAC240		
ZACFP240		
ZACFPD240		
	Wireguards:	
	WGCLX24 __	24" wireguard qty 1, (Must specify color) ‡
	WGCLX36 __	36" wireguard qty 1, (Must specify color) ‡
	WGCLX48 __	48" wireguard qty 1, (Must specify color) ‡
	WGCLX48 __ J2	48" wireguard qty 2, (Must specify color) ‡
	WGCLX48 __ J25	48" wireguard qty 25, (Must specify color) ‡
	WGCLX48 __ J50	48" wireguard qty 50, (Must specify color) ‡

‡ Option Value Ordering Restrictions


Option value	Restriction
347V, 480V	Voltage selected utilizes a step-down transformer. Not available with L24 when ordered with N100. Not available with PS1050, E10WLCP or BGTD option.
BGTD	Not available with MVOLT, 208V or 240V. Not available with HA. Available with L48 or L96 only. Not available with PS1050 or E10WLCP options. Not available with 208 or 240V. Not available Individual controls, nLight Wired, or nLight Wireless options.
CS1W, CS3W, CS7W, CS11W, CS25W, CS963W, CS97W	Not available with BGTD option. Must specify voltage. Not available with PLR options.
CS6WG16STOWDSD	Not available with Individual controls, nLight wired networking, nLight wireless networking, nLight wireless zone control options.
Driver	When continuous row mounting, fixtures must all have the same driver selection.
E10WLCP	Not available with OUTCR, Not available with HA. Not available with 347V or 480V. Not available with BGTD option. Requires SPD option. Not available with L24 or L36. Not available with L48 in combination with N100.
E10WSTAR	Not available with OUTCR, Not available with HA. Not available with 347V or 480V. Not available with BGTD option. Requires SPD option. Not available with L24 or L36.
EPNKO	Not available OUTEND.
EZ1	Not available with HA option. Not available with 5000LM, 7500LM.
FDL, RDL, WDL	Only available with general distribution. Not available with CLXRN accessories.
GZ1, GZ10	Not available with Individual controls, nLight wired networking, nLight wireless networking, nLight wireless zone control options.
HA	Not available with L24, L26, Not available with BGTD option. Not available with EZ1. Only available with L48 3000/4000/5000LM and L96 6000/8000/10000LM.
HEF	not available with L48 3000LM and L96 6000LM
LUGR	Not available with L36 length. Only available with WH finish. Not compatible with THCLX Hanger or wireguard accessories. LUGR option required for some DLC premium qualifications - Please check the DLC Qualified Products List to determine if LUGR option is necessary to meet requirement. If mounting in continuous rows, ensure all models ordered with LUGR option if required on any configuration to ensure rows match in form factor. LUGR reflectors ship in standard fixture carton and are not sold as separate accessory - this option MUST be specified as part of the CLX model number.
MSD7, MSDPDT7, MSD7ADC, MSDPDT7ADC	Not available with any other control option. Requires EZ1. Sensor housing will be the same color as lens end caps.
N100, N100EMG	nLight EMG option requires a connection to existing nLight network. Power is provided from separate N100 enabled fixture.
ND, WD, AD2	Not available with CLXRN accessories. Available L/LENS only.
NES7, NESPDT7, NES7ADCX, NESPDT7ADDC	Not available with any other control option. Requires EZ1. Requires N100 or N100EMG option, N100EMG with NES7 requires RFA. Sensor housing will be the same color as lens end caps.
NLTAIR2 RES7(EM), NLTAIR2 RES7PDT(EM), NLTAIR2 RIO(EM)	Not available with L96 14000LM, 18000LM, 20000LM. Sensor housing will be the same color as lens end caps. For EM, see UL924 Sequence of Operation chart below.
OCS	Must specify voltage.
OUTCR	Not available with L24, Not available with PLR options.
OUTEND	Not available with PLR options.
PLR1LVG	Not available with Individual controls, nLight Wired, or nLight Wireless options. Refer to page 9 for more PLR details.
PS1050	Not available with 347V or 480V. Not available with BGTD option. Requires SPD option. Not available with L24 or L36. Not available with L48 in combination with N100. Not available with HA.
SBLW, SBLMB, SBLGV, SBLSKGY	When ordered with L24 only available with 1500LM or 2000LM in combination with GZ10 driver. Not for use with THCLX, CLXANGBKT or WGCLX accessories. Not available with RDL lens options.
SEF	Not available with EZ1 when ordered with L24 with 5000LM or L36 with 7500LM.
SPD	Required with PS1050, E10WLCP, BGTD.
THCLX __, CLXANGBKT __	Not available with louver or wireguards. THCLX __ not available with LUGR.
Wireguards	Not for use with LUGR option. For L96 fixtures, use qty 2 48" wireguards.

UL924 Sequence of Operation

The below information applies to all nLight AIR devices with an EM option.

- EM devices will remain at their high-end trim and ignore wireless lighting control commands, unless a normal-power-sensed (NPS) broadcast is received at least every 8 seconds.
- Using the CLAIRITY+ mobile app, EM devices must be associated with a group that includes a normal power sensing device to receive NPS broadcasts.
- Only non-emergency rPP20, rLSXR, rSBOR, rSDGR, and nLight AIR luminaires with version 3.4 or later firmware can provide normal power sensing for EM devices. See specification sheets for control devices and luminaires for more information on options that support normal power sensing.

OPTIONS AND ACCESSORIES




Wireguard

Ships separately from fixture:
96" fixture requires two WGCLX48.
Order as:
WGCLX24____
WGCLX36____
WGCLX48____




Aircraft Cable with Canopy
Available in 120" or 240"
Order as:
ZAC120
ZAC240



HANGER CHAIN
36" chain with Y hanger. ships as a pair
Order as:
HC36



ZACVH HANGER
10' Aircraft cable with Y hanger.
Order as:
ZACVH



Tong hanger
Ships as a pair
Order As:
THCLX____

CLX LED Linear


DIMENSIONS

All dimensions are in inches (centimeters) unless otherwise indicated.

Dimensions may vary with options or accessories.

INTEGRATED SENSOR ADDS 2.0 INCHES TO STANDALONE FIXTURE LENGTH
HOUSING END CAP ADDS 0.236 INCHES TO FIXTURE LENGTH PER SIDE. DIMENSIONS BELOW INCLUDE ENDCAPS.


A - 7/8" KNOCK OUT
B - 0.5" by 0.16" SLOT
C - 0.3" DIA HOLE

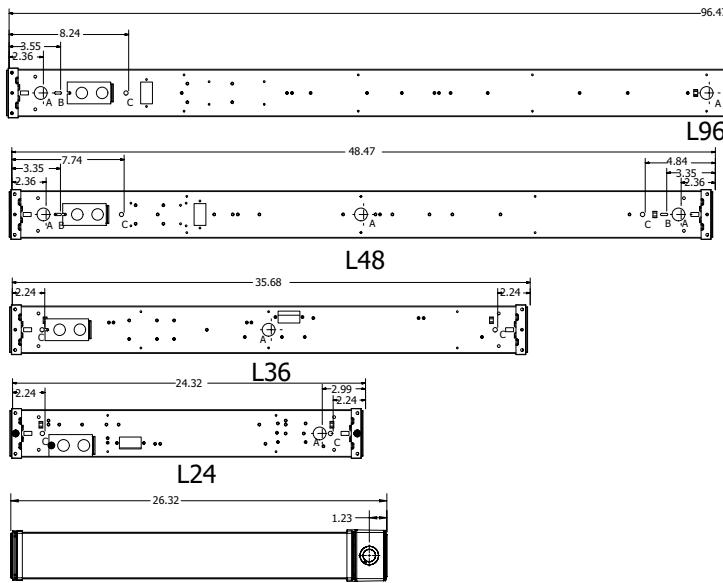







PALLET DIMENSIONS

Length	Approx Weight	Fixtures per pallet	Pallet Dims (LxWxH)
L24	4 lb	100	54x46x37
L36	5 lb	80	54x46x37
L48	7.5 lb	64	54x46x37
L96	14 lb	64	98x46x37

THCLX - SHIPS TWO PER ORDER,
UTILIZES A #8 HEX HEAD SCREW AND NUT
Fixture sits 1.3 inches from structure when mounted

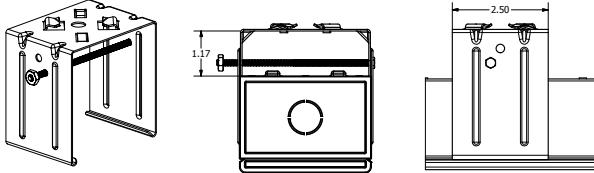

CLXANGBKT - SHIPS TWO PER ORDER
HOLES TO MOUNTING STRUCTURE ARE 0.175" DIA, 2.5" APART
Fixture sits approximately 3.5" from structure when mounted horizontal to structure

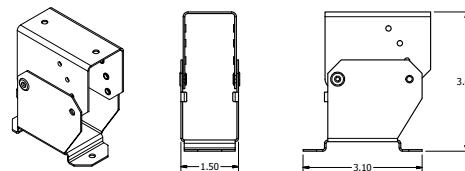

LUGR Reflector Option
- applies to all lens types

PHOTOMETRICS

See www.lithonia.com.

LITHONIA LIGHTING

POWER SENTRY EMERGENCY BATTERY PACKS

	SEF Emergency Lumens	HEF Emergency Lumens
PS1050	Factory installable	1400
E10WLCP	Factory installable	1400
PS1555LCP	Field installable, remote mount only	2000

Note: For emergency lumen output of specific model, please consult factory. One board will be illuminated during emergency operation.

Emergency Battery Pack Options - Field Installable

Battery Model Number	Wattage	Runtime (Minutes)	Lumen Output* @ 120 Lumens/Watt	Other
ILB CP07 2H A	7W	120	840	Storm Shelter / 2 Hour Runtime
ILB CP10 A	10W	90	1200	
ILBLP CP10 HE SD A	10W	90	1200	Title 20, Self Diagnostic
ILB CP10 HE AELR A	10W	90	1200	Title 20; Enabled with Self Testing, Automated Reporting (STAR)
ILBLP CP15 HE SD A	15W	90	1800	Title 20, Self Diagnostic
ILB CP20 HE A	20W	90	2400	Title 20
ILB CP20 HE SD A	20W	90	2400	Title 20, Self Diagnostic

All the above are UL Listed products that are certified for field install external/remote to the fixture.

*Minimum delivered lumen output to assist in product selection for increased fixture mounting height.

The CP10 delivered emergency illumination outperforms legacy 1400 lumen fluorescent emergency ballast.


Please contact us at techsupport@iotaengineering.com for any Emergency Battery related questions.

Enabled with STAR

Emergency Lighting with Self-Testing Automated Reporting (STAR), enables self-testing and automated reporting to aid in life safety code compliance. Build your solution and choose your preferred deployment from Mobile STAR, where test data is logged in each individual unit and broadcast to the CLAIRity™+ app, or Connected STAR, where test data is logged in the STAR Gateway by IOTA® and emailed directly. **Leave the ladders, disruptions and written records behind with emergency lighting solutions with STAR!**

Life Safety Code NFPA 101 testing and reporting requirements for emergency lighting include:

-  Testing for 30 seconds every 30 days
-  Testing for 90 minutes once a year
-  Record keeping and to report to the authority having local jurisdiction

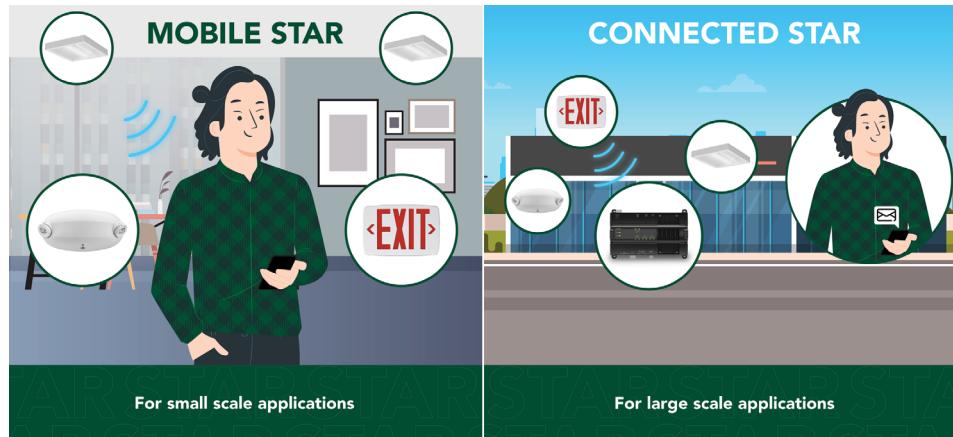

CLX CHARACTERISTICS

Nominal Lumen Package	Length	Wattage								Length	Width	Depth	Comparable Light Source				
		Standard Efficiency				High Efficiency											
		120V	277V	347V	480V	120V	277V	347V	480V								
2500LM	24"	18.4	18.4	24.0	24.0	17.4	17.4	23.1	23.1	24	3.5	3.75	1-lamp 32W T8, 1-lamp 54W T5HO, 50W HID				
5000LM	24"	41.5	41.5	47.4	47.4	38.1	38.1	44.1	44.1	24	3.5	3.75	2-lamp 32W T8, 1-lamp 54W T5HO, 70W HID				
3750LM	36"	26.5	26.5	32.1	32.1	25.1	25.1	30.7	30.7	36	3.5	3.75	1-lamp 32W T8, 1-lamp 54W T5HO, 50W HID				
7500LM	36"	62.6	62.6	68.6	68.6	54.0	54.0	59.7	59.7	36	3.5	3.75	2-lamp 32W T8, 1-lamp 54W T5HO, 70W HID				
5000LM	48"	31.8	31.8	37.2	37.2	30.3	30.3	35.8	35.8	48	3.5	3.75	2-lamp 32W T8, 1-lamp 54W T5HO, 70W HID				
10000LM	48"	70.7	70.7	76.2	76.2	65.3	65.3	70.8	70.8	48	3.5	3.75	3-lamp 32W T8, 2-lamp 54W T5HO, 100W HID				
10000LM	96"	63.7	63.7	69.0	69.0	60.6	60.6	66.1	66.1	96	3.5	3.75	3-lamp 32W T8, 2-lamp 54W T5HO, 100W HID				
20000LM	96"	141.3	141.3	146.8	146.8	130.5	130.5	136.1	136.1	96	3.5	3.75	6-lamp 32W T8, 4-lamp 54W T5HO, 200W HID				

Note: For wattage by configuration, please reference the [CLX Operational Data Document](#).

Lumen Package	UGR Values of CLX L24 @ 80CRI and 3500K UGR (70% 50% 20% reflectance using a 4H x 8H room size)													
	FDL		RDL		WDL		FDL LUGR		RDL LUGR		WDL LUGR		L/LENS	
	Crosswise	Endwise	Crosswise	Endwise	Crosswise	Endwise	Crosswise	Endwise	Crosswise	Endwise	Crosswise	Endwise	Crosswise	Endwise
1500LM SEF	21.2	23.8	19.4	25.2	17.4	21.1	16.8	14	17.8	16.6	18.1	17.9	24.9	25.1
2000LM SEF	22.3	24.9	20.5	26.3	18.6	22.3	17.9	15.1	18.8	17.6	19.2	18.9	26.1	26.2
2500LM SEF	23.1	25.7	21.3	27.1	19.4	23.1	18.6	15.8	19.6	18.4	19.9	19.7	26.9	27
3500LM SEF	24.1	26.7	22.3	28.1	20.4	24.1	19.7	16.9	20.7	19.5	21	20.8	27.9	28.1
4500LM SEF	25.4	28	23.6	29.4	21.7	25.4	20.7	17.9	21.7	20.5	22	21.8	29.2	29.3
5000LM SEF	25.6	28.2	23.3	29.1	21.4	25.1	21	18.3	21.5	20.3	21.8	21.5	29.4	29.5
1500LM HEF	21.1	23.7	19.3	25.1	21.8	25.5	16.5	13.7	17.6	16.3	17.8	17.6	24.9	25
2000LM HEF	22.2	24.8	20.4	26.2	17.4	21.1	17.6	14.8	18.6	17.4	18.8	18.6	26	26.2
2500LM HEF	23	25.7	21.3	27	18.5	22.2	18.4	15.6	19.4	18.2	19.7	19.4	26.8	27
3500LM HEF	24.1	26.7	22.3	28.1	19.3	23	19.8	17	20.9	19.7	21.1	20.9	27.9	28
4500LM HEF	25.3	27.9	23.5	29.3	20.4	24.1	20.8	18	21.8	20.6	22.1	21.8	29.1	29.3
5000LM HEF	25.5	28.1	23.7	29.5	21.6	25.3	21.1	18.3	22.1	20.9	22.3	22.1	29.3	29.5

UGR varies based on luminaire options and is affected by application dependent parameters. Numbers depicted here are considered "Luminaire-UGR and/or "Point-UGR" values. To determine a more precise maximum UGR value ("Application-UGR"), a full lighting design layout should be completed with the selected luminaire configuration for each application

Lumen Package	UGR Values of CLX L36 @ 80CRI and 3500K UGR (70% 50% 20% reflectance using a 4H x 8H room size)							
	FDL		RDL		WDL		L/LENS	
	Crosswise	Endwise	Crosswise	Endwise	Crosswise	Endwise	Crosswise	Endwise
2250LM SEF	21.4	24.1	19.7	25.6	17.7	21.6	25.2	25.4
3000LM SEF	22.3	25	20.6	26.5	18.6	22.5	26.2	26.3
3750LM SEF	23.2	25.9	21.4	27.3	19.5	23.4	27	27.2
5250LM SEF	24.2	26.9	22.5	28.4	20.5	24.4	28	28.2
6750LM SEF	25.1	27.8	23.3	29.2	21.4	25.3	28.9	29
7500LM SEF	25.4	28.1	23.6	29.5	21.7	25.6	29.2	29.4
2250LM HEF	25	27.7	20.5	26.4	18.6	22.5	25.2	25.3
3000LM HEF	25.3	28	21.4	27.3	19.4	23.3	26.1	26.2
3750LM HEF	21.4	24.1	22.4	28.3	20.5	24.4	27	27.1
5250LM HEF	22.3	25	23.2	29.2	21.3	25.2	28	28.1
6750LM HEF	23.1	25.8	23.6	29.5	21.6	25.5	28.8	29
7500LM HEF	24.2	26.8	19.6	25.5	17.7	21.6	29.1	29.3

UGR varies based on luminaire options and is affected by application dependent parameters. Numbers depicted here are considered "Luminaire-UGR and/or "Point-UGR" values. To determine a more precise maximum UGR value ("Application-UGR"), a full lighting design layout should be completed with the selected luminaire configuration for each application

Lumen Package	UGR Values of CLX L48 @ 80CRI and 3500K UGR (70% 50% 20% reflectance using a 4H x 8H room size)														
	FDL		RDL		WDL		FDL LUGR		RDL LUGR		WDL LUGR		L/LENS		
	Crosswise	Endwise	Crosswise	Endwise	Crosswise	Endwise	Crosswise	Endwise	Crosswise	Endwise	Crosswise	Endwise	Crosswise	Endwise	
3000LM SEF	21.8	24.5	19.7	25.3	18.6	23.4	19.2	16.5	20.2	19	20.6	20.3	24.8	25.6	
4000LM SEF	22.8	25.5	20.7	26.3	19.6	24.4	20.3	17.5	21.2	20	21.6	21.4	25.8	26.6	
5000LM SEF	23.6	26.3	21.4	27	20.4	25.2	21	18.2	21.9	20.7	22.3	22.1	26.6	27.3	
7000LM SEF	24.8	27.6	22.7	28.3	21.6	26.5	22.3	19.6	23.3	22.1	23.7	23.4	27.8	28.6	
9000LM SEF	25.6	28.4	23.5	29.1	22.5	27.3	23.2	20.4	24.1	22.9	24.5	24.3	28.6	29.4	
10000LM SEF	26	28.7	23.8	29.5	22.8	27.6	23.6	20.8	24.5	23.3	24.9	24.7	29	29.8	
3000LM HEF	x	x	x	x	x	x	x	x	x	x	x	x	x	x	
4000LM HEF	22.8	25.6	20.7	26.3	22.8	25.6	20.3	17.5	21.3	20.1	21.7	21.4	29.5	30.3	
5000LM HEF	23.6	26.3	21.4	27	23.6	26.3	21	18.2	21.9	20.7	22.3	22.1	30.2	31	
7000LM HEF	24.8	27.6	22.7	28.3	24.8	27.6	22.4	19.6	23.4	22.2	23.8	23.5	27.8	28.6	
9000LM HEF	25.7	28.4	23.6	29.2	25.7	28.4	23.2	20.4	24.2	23	24.6	24.3	28.7	29.5	
10000LM HEF	26	28.7	23.9	29.5	26	28.7	23.6	20.9	24.6	23.4	25	24.7	29	29.8	

UGR varies based on luminaire options and is affected by application dependent parameters. Numbers depicted here are considered "Luminaire-UGR and/or "Point-UGR" values. To determine a more precise maximum UGR value ("Application-UGR"), a full lighting design layout should be completed with the selected luminaire configuration for each application

Lumen Package	UGR Values of CLX L96 @ 80CRI and 3500K UGR (70% 50% 20% reflectance using a 4H x 8H room size)														
	FDL		RDL		WDL		FDL LUGR		RDL LUGR		WDL LUGR		L/LENS		
	Crosswise	Endwise	Crosswise	Endwise	Crosswise	Endwise	Crosswise	Endwise	Crosswise	Endwise	Crosswise	Endwise	Crosswise	Endwise	
6000LM SEF	21.8	24.6	19.7	25.4	17.9	22.4	19.3	16.5	20.2	19	20.6	20.4	24.8	25.6	
8000LM SEF	22.8	25.5	20.7	26.4	18.8	23.4	20.3	17.6	21.2	20.1	21.6	21.4	25.8	26.6	
10000LM SEF	23.6	26.3	21.4	27.2	19.6	24.2	21	18.3	21.9	20.8	22.3	22.1	26.5	27.3	
14000LM SEF	24.8	27.6	22.7	28.5	20.9	25.5	22.4	19.6	23.3	22.1	23.7	23.5	27.8	28.6	
18000LM SEF	25.7	28.4	23.5	29.3	21.7	26.3	23.2	20.5	24.1	23	24.5	24.3	28.6	29.4	
20000LM SEF	26	28.7	23.9	29.6	22	26.6	23.6	20.9	24.5	23.4	24.9	24.7	29	29.7	
6000LM HEF	x	x	x	x	x	x	x	x	x	x	x	x	x	x	
8000LM HEF	22.8	25.6	20.7	26.5	18.9	23.5	20.4	17.6	21.3	20.1	21.7	21.5	25.8	26.6	
10000LM HEF	23.6	26.3	21.4	27.2	19.6	24.2	21	18.3	21.9	20.8	22.3	22.1	27	27.8	
14000LM HEF	24.9	27.6	22.7	28.5	20.9	25.5	22.4	19.7	23.4	22.2	23.8	23.5	27.8	28.6	
18000LM HEF	25.7	28.4	23.6	29.3	21.7	26.3	23.2	20.5	24.2	23	24.6	24.3	28.7	29.5	
20000LM HEF	26	28.8	23.9	29.6	22.1	26.6	23.7	20.9	24.6	23.4	25	24.8	29	29.8	

UGR varies based on luminaire options and is affected by application dependent parameters. Numbers depicted here are considered "Luminaire-UGR and/or "Point-UGR" values. To determine a more precise maximum UGR value ("Application-UGR"), a full lighting design layout should be completed with the selected luminaire configuration for each application

AMBIENT TEMPERATURE RATINGS

Driver Package		GZ10			EZ1 or EOHN			Any Driver	
Length	Lumen package	Direct Surface	THCLX/ Suspended	HA Option (Direct or Suspended)	Direct Surface	THCLX	Suspended 18"	Xpoint/ BGTD Direct Surface	PS1050 Suspended
L24	1500LM	40C	40C	N/A	35C	35C	35C	N/A	N/A
	2000LM	40C	40C		35C	35C	35C		
	2500LM	40C	40C		35C	35C	35C		
	3000LM	40C	40C		40C	40C	40C		
	4500LM	40C	40C		35C	35C	40C		
	5000LM	40C	40C		25C	30C	35C		
L36	2250LM	40C	40C	N/A	40C	40C	40C	N/A	N/A
	3000LM	40C	40C		40C	40C	40C		
	3750LM	40C	40C		40C	40C	40C		
	5250LM	40C	40C		35C	35C	40C		
	6750LM	30C	40C		35C	35C	40C		
	7500LM	30C	40C		25C	30C	35C		
L48	3000LM	40C	40C	N/A	50C	40C	40C	35C	25C
	4000LM	40C	40C		50C	40C	40C		
	5000LM	40C	40C		50C	35C	35C		
	7000LM	30C	40C		35C	35C	40C		
	9000LM	30C	40C		25C	30C	35C		
	10000LM	30C	40C		25C	30C	35C		
L96	6000LM	40C	40C	N/A	50C	35C	35C	35C	25C
	8000LM	30C	40C		50C	35C	35C		
	10000LM	30C	40C		50C	25C	30C		
	14000LM	40C	40C		35C	35C	40C		
	18000LM	30C	40C		25C	30C	35C		
	20000LM	30C	40C		25C	30C	35C		

RRL - RELOC®-Ready Lumenaire

- RRL connectors can be used with Quick-Flex®, System 820 and OnePass® systems.
- Load side of connector factory installed to luminaire.
- 4-pole mating connector with push-in terminations allows for simple installation.
- Touch-safe design on both halves meets UL/CSA requirement.
- Wiping contact design allows safe disconnect under load.



ORDERING INFORMATION

Lead times will vary depending on options selected. Consult with your sales representative.

Example: RRLA

Series	Wiring instructions
RRL RELOC®-ready luminaire	<p>A Hot conductor wired to position #1 (phase A)</p> <p>B Hot conductor wired to position #2 (phase B)</p> <p>C Hot conductor wired to position #3 (phase C)¹</p>

Compatible RELOC® Cables for Industrial Luminaires (ordered and shipped separately)



OCS



OCU



OD



DC



PT

Notes

1 C, ABE, and C12S options are not used with Quick-Flex QFC, QSFC, QPT, and QD.

PLUG-IN WIRING INFORMATION

Advanced plug-in system with two-circuit capability. Available on industrial and strip products and a variety of architectural products mounted in continuous rows. PLR22 (2-circuit) and crossover harness switches hot circuit serving next fixture in row. Reduces fixture types on job for alternating circuit applications (see example below.)

Easy one-step installation, saves up to 35% on labor costs. Expanded switching flexibility helps save energy.

Rows can be 50% longer with two-circuit systems. Polarized, lock-together nylon connectors prevent miswiring in the field. #12 THHN conductor, rated 600V, 90°C. White neutral wire included. Grounding accomplished by fixture in-row connectors.

CSA certified systems available with up to 2 circuits. G ground required.

Not for use with dedicated emergency circuits.

Note: Specifications subject to change without notice.



Wiring

PLR

Advanced 1 or 2-Circuit Plug-In

ORDERING INFORMATION

Lead times will vary depending on options selected. Consult with your sales representative.

Series	Number of hot wires	Branch circuits (PLR2A / PLR2B Only)		Dimming	Ground
PLR22	(blank) Not required for PLR22	(blank) Not required for PLR22		(blank) No Dimming	G Ground (required)
PLR	1 Black	(blank) Not required for PLR1		(blank) No Dimming	G Ground (required)
	2 Black and red	Circuits to which driver is connected	Battery charging circuit (must be unswitched)	LV Low-voltage Dimming	G Ground (required)
		(blank) Not required for PLR22	(blank) No battery charging circuit		
		A Black wire	ELA Battery pack wired to black wire		
		B Red wire	ELB Battery pack wired to red wire		

Typical Applications

Notes:

When specifying PLR1, you will not specify A or B as there is only a single hot wire which would be black in color.

- Multiple-circuit and single-circuit for longer continuous rows
- Multiple-circuit with alternating fixtures on separate circuits and 2-circuit PLR22
- Multiple circuit with night-lights located along row as desired