



IZERWAREN
order
numbers

Stainless steel Toggle Device

- 316 stainless steel
- Seawater resistant
- also available in mild steel

Toggle device, both sided

Extra heavy duty


316 stainless steel door toggle,
Includes:

- Toggle Lever;
- Back lever with shaft;
- aluminum bushing with
- nylon bearing and M10 grease
- M10 grease nipple
- stainless steel washer
- M16 locknut

Toggle lever from center: 6 1/2";
Overall: 9 7/16" long,
bushing OD: 45 mm or 1 3/4" Ø
length aluminum sleeve 70 mm

44.9411 **SET as above without stop**
44.9401 **SET as above with stop**
(not shown)

44.943 **Strike /wedge**
85 x 20 x 20 mm
304 Stainless steel
Weld on

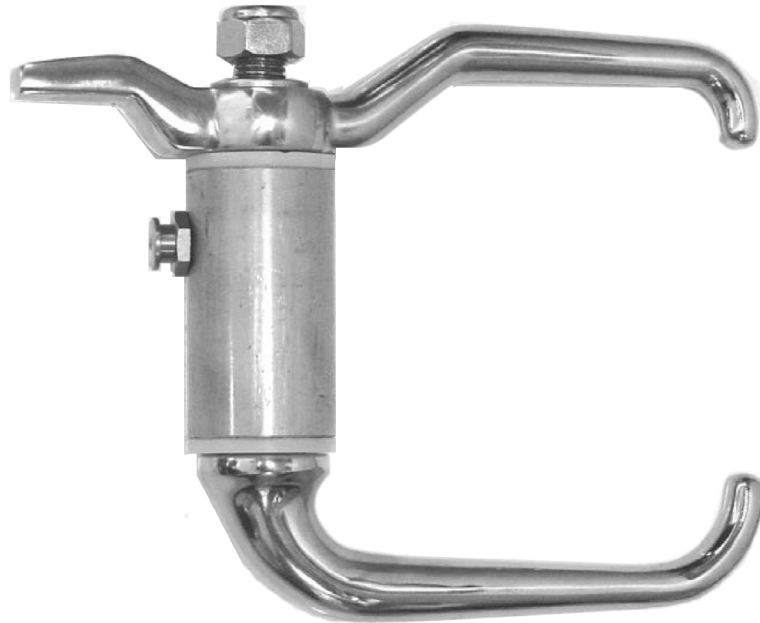

#44.9411 Extra heavy duty Mirror Polished 316 stainless steel door toggle
Shaft 24.5 mm diameter with M16 Thread, Locknut and washer
WITHOUT STOP. With aluminum bushing and nylon bushings:
Overall length: 3 1/4 inch long; 1 3/4 inch diameter
Toggle lever: 6 1/2" long from center ax.
Cam: 2 15/16 inch from center
Grease nipple M10.




#44.9412
Outside: with square nut




#44.9413
Outside: with blind cap



#44.9404
With Weld On Bushing.
With inside lever only,
aluminum bushing

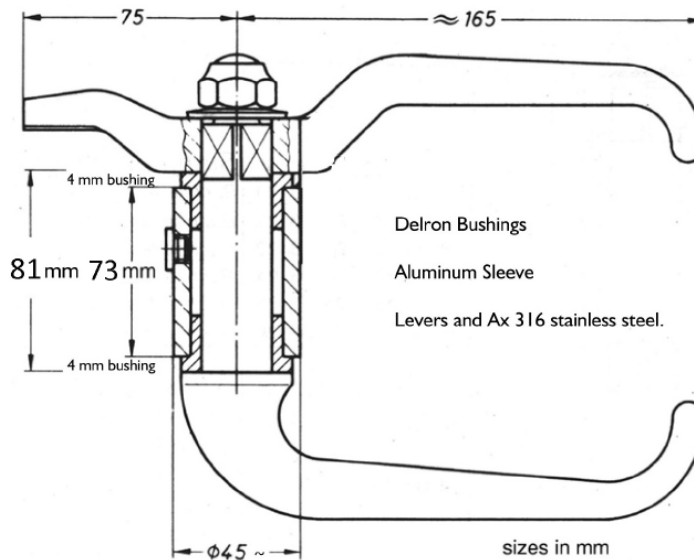

#44.9401 Extra heavy duty 316 stainless steel door toggle with sleeve and bushings 78 mm.

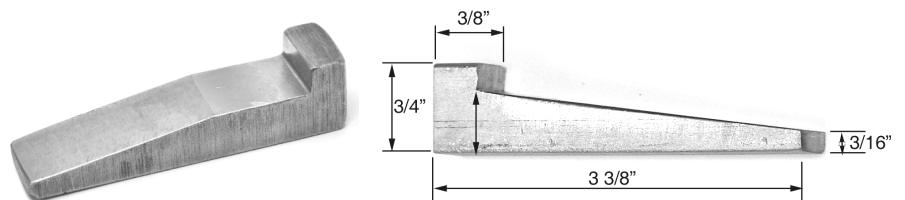

#44.943 Wedge shaped weld on strike: 3 3/8 inch X 3/4 inch X 3/4 inch wide;
Satin 304 stainless steel. Order Strike Wedge separately.