


Izerwaren Stronger than regular "Euro" hinges  
Order numbers

### 303 STAINLESS STEEL EASY ON HINGE LIGHT DUTY INTERIOR GRADE WITH STEEL SPRING


**42.20S Easy on hinge (2000S)** spring loaded  
For overlay, half overlay or insert doors.  
Door thickness: 3/4" or 20 mm  
Dimensions: Open: 4 1/16" L x 1 3/4"W  
The spring loaded version has an electroplated hardened steel spring.

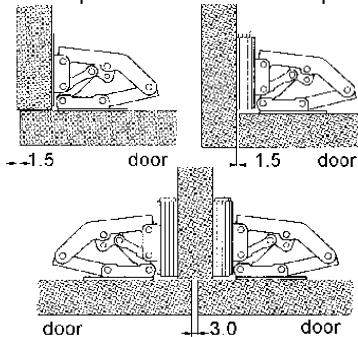





**Installation:**

Easy and quick installing non mortise cabinet hinge, no machining. Self closing and self locking. (spring loaded version)  
Use filler plates when installing half overlay or insert doors

**42.00I** White nylon filler plates (2001)  
Filler plates thickness: 1/16" thick  
For 2000S model only






Filler plate #42.00I

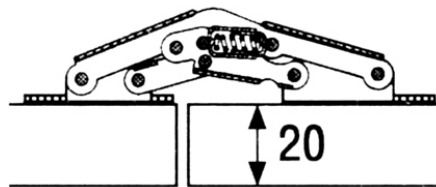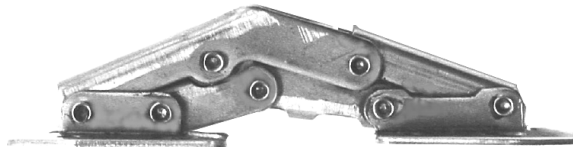



Leave 1.5 mm 1/16" gap when installing insert doors and full overlay.  
Leave 3 mm 1/8" gap when installing 2 doors back to back half overlay. For 3/4" thick material

### 90 DEGREE OFFSET STEEL GALVANISED STEEL EASY ON HINGE

**Offset type hinge.**  
**42.0FS Easy on hinge (2000FS)** spring loaded  
For overlay doors.  
90 degree opening, door swings out.  
Galvanized steel.  
Door thickness: 3/4" or 20 mm  
Dimensions: Open: 4 1/16" L x 1 3/4"W  
Self closing and self locking = (spring loaded version)  
The spring loaded version has an electroplated hardened steel spring.

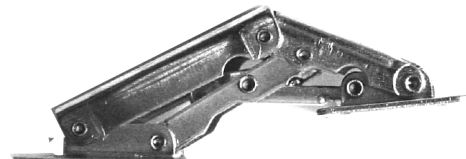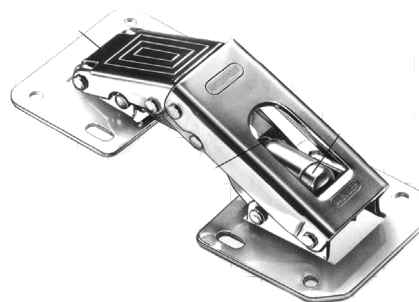

#42.0FS 90 degree offset galvanized steel "easy on hinge", spring loaded hinge

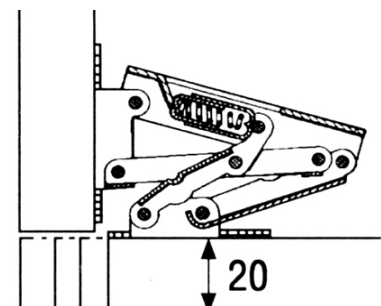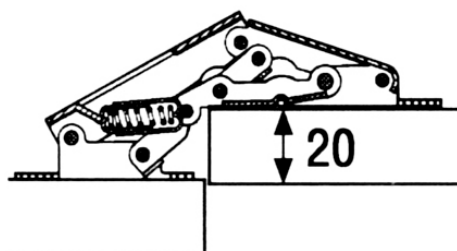

Leave 1.5 mm 1/16" gap when installing insert doors and full overlay. For 3/4" thick material