


Izerwaren
Order
numbers

- 316 Stainless steel slam latch with lift ring
- sea water resistant
- slam action when closing
- strike included
- finish: Lift ring polished stainless steel 316; body and cam: satin finish

SLAM LATCH WITH LIFT RING

Polished 316 stainless steel




43.F01 Slam latch for hatches

Set: latch, mounting ring with screws; strike.
Diameter: 2 3/8"
Built in diameter: 2"
Material thickness: from 1/4" up to 13/16"
Spring loaded slam action on latch bolt


43.F02 Slam latch for hatch, locking with key

Slam latch #43.F01

Installation body: Drill hole: 2" Ø




Mounting ring: 2 3/8" diameter

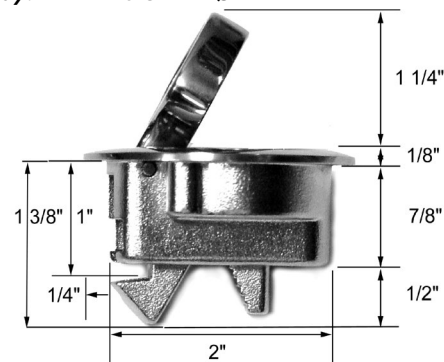




#43.F01 Slam latch

SLAM LATCH WITH PULL

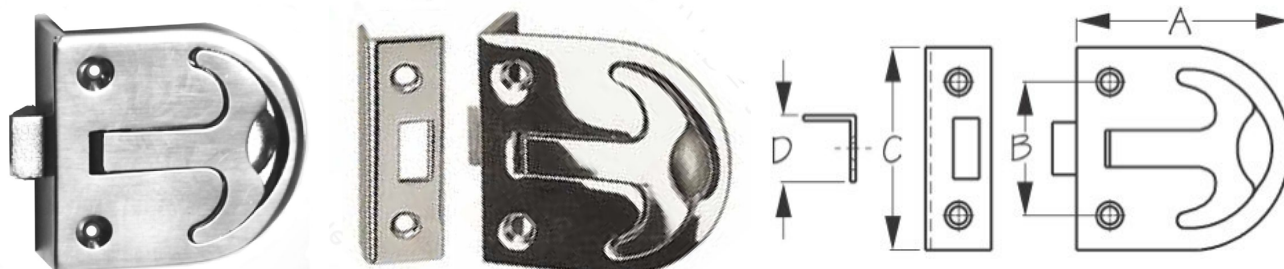

#43.831S Flush Slam latch, Pull type. Anchor style lift ring; strike plate included. **Pull Out** to release.
Dimensions: 61 mm long (A) x 58 mm wide (C) x 19 mm deep (D). Door thickness: 19 mm
Dimensions: 2 7/16" (A) x 1 1/2" (B) x 2 1/4" (C) x 3/4" (D) Door thickness: 3/4"
316 stainless steel Satin Finish

SLAM LATCH WITH LIFT RING



#46.108 Flush Pull Lift with latch Dimension: 60 x 42 x 16 mm;

Angle strike 16 x 16 x 42 mm; Door thickness: 5/8 inch or 16 mm. Polished 304 Stainless Steel.

Pull out to release