


IZERWAREN
Order
numbers

- 21.516 Finger pull (5160/61)**
with elbow catch, strike and.
latch operates by pulling lever with
finger, through hole in door.
Cover ring in hole in door:
drill 29 mm hole; OD: 34 mm ID: 23 mm
strike plate included; both handed

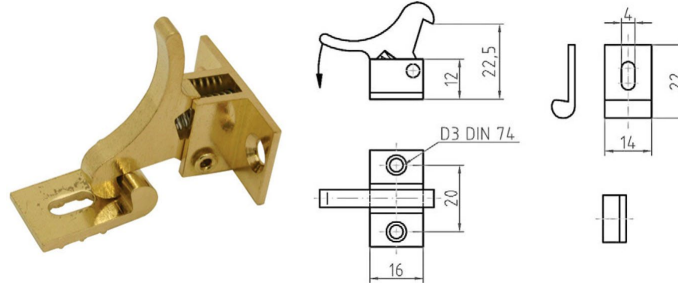

Finger pull #21.516 elbow catch; latch operates by pulling lever with finger, through hole in door. Strike plate included; both handed


- 21.2801 Ring (631.02.801) Brass Polished**
Diameter 35 mm; 18 mm high;

- 21.2701 Ring (631.02.701) Satin Nickel**
Diameter 35 mm; 18 mm high;




#21.2801 Brass #21.2701 nickel Brass Cover ring for hole in door:
Drill 35 mm hole; D = 35 mm; A = 19 mm

- 46.108 Flush Pull Lift with latch (4108)**
Brass, polished chrome plated,
Strike plate included.
Body: 60 x 40 mm - 2 3/8" x 1 9/16";
Strike: 15 x 15 mm - 5/8" x 5/8"
mortise depth: 18 mm - 11/16"

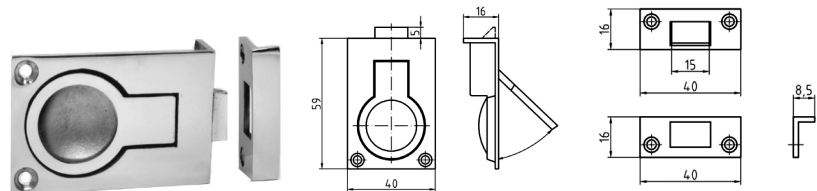

Finger pull catch #46.108 Polished stainless steel

- 46.020 Flush Pull**
Brass, polished chrome plated,
Dimensions: 85 x 50 x 13mm
mortise depth: 13 mm 5/8"

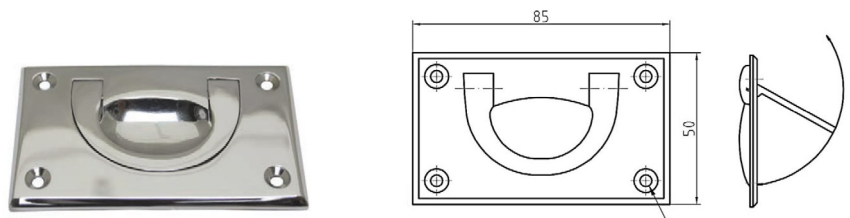


Flush pull #46.020 chrome/brass 85 x 50 mm.

- 43.214 Flush Pull** stainless steel
2 1/4" x 3" ~ 57 x 76 mm
316 Cast Stainless steel

- 43.215 Flush Pull** stainless steel
Dimensions: 2 1/2" x 1 3/4"
316 Cast Stainless steel

- 43.216 Flush Pull** stainless steel
Dimensions: 1 1/2" x 1 15/16"
316 Cast Stainless steel



Flush Pull #43.214
3" x 2 1/4"




#43.215;
1 3/4" x 2 1/2"



#43.216;
1 1/2" x 1 15/16"

x 37 mm

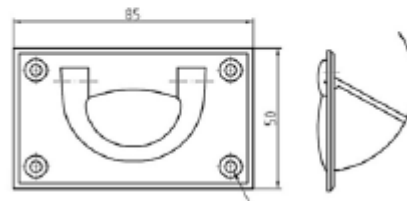

50 mm.



Flush pull #46.020 chrome/bras