

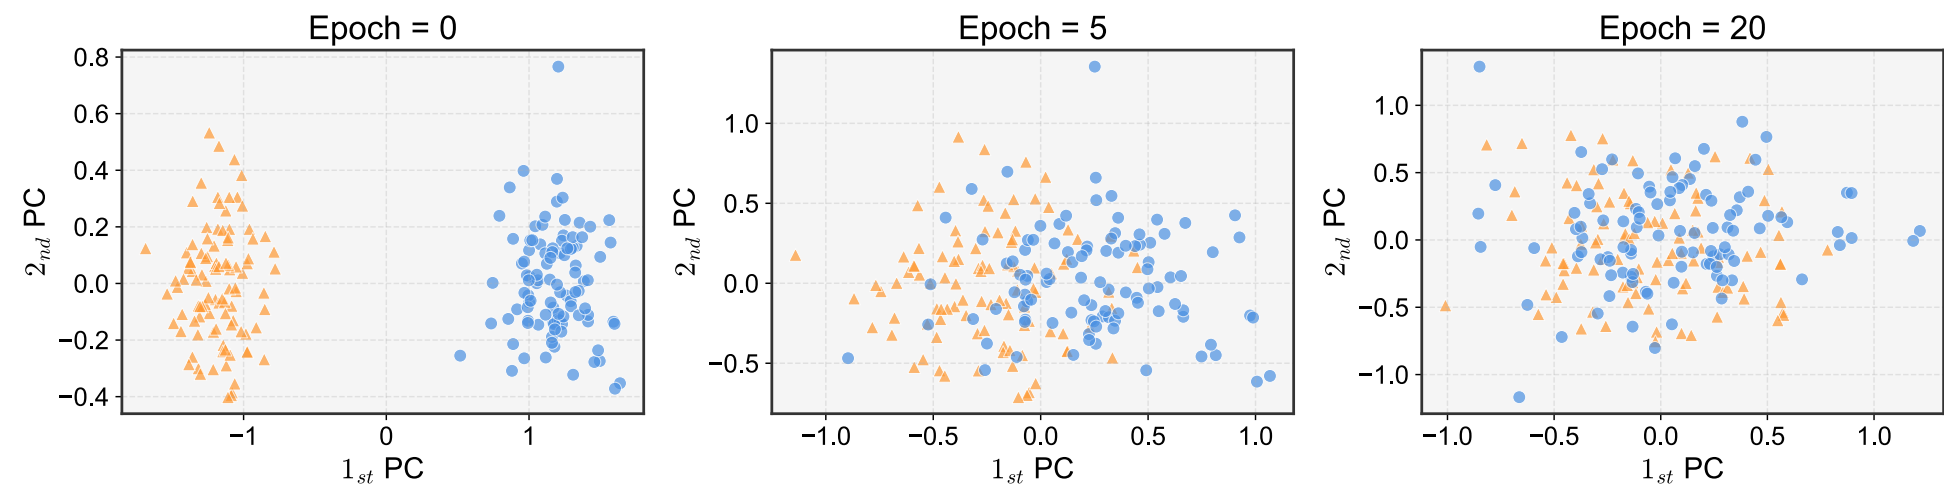


Figure: Separation between the principal components of the encoder outputs when going from power side-channel (XMEGA source device) to cache side-channel (x86 target device). The reduced differences in encoder outputs at epoch 20 indicates the presence of transferable side-channel information.