

CONCEPT BRIEF · DISTRIBUTED ENERGY · CONCENTRATED SOLAR

# Maintenance-Free Solar Generator

*A sun-tracking mirror field and a zero-wear NASA-heritage engine, built for any high-DNI desert site*

---

SITE

**Any high-DNI desert site (illustrated with U.S. Desert Southwest data)**

PERFORMANCE REFERENCE

**Matched to Sweden's record dish-Stirling system**

CONTINUOUS OUTPUT

**~20–26 kWe (single array)**

ENGINE MAINTENANCE INTERVAL

**Zero — no contacting or wearing parts**

LONGEST FIELD-PROVEN RUN

**14 years continuous, NASA Glenn Research Center**

MIRROR MECHANISM

**Solid-state MEMS, no motors or bearings**

Concept and research by **Brett R. Jones** · Independent personal research · First published 18 August 2026, revised 5 September 2026

## WHY THIS IS PUBLISHED OPENLY

*This concept is released free for anyone to read, use, or build on. It is my hope that some person, group, or organization with the means to do so will carry it toward mass production, and that it helps in some small way to ease the world's energy needs. I am not seeking to license, sell, or commercialize it.*


— Brett R. Jones

## FOR RESEARCH GROUPS

Every component here is independently field-proven — see Section 7 — but the two of them have never been run together, and neither MEMS mirror technology nor this exact optical geometry has been validated for outdoor concentrated-solar duty. **Section 6 lays out the open technical questions as bounded, testable research problems** (bench tests, chamber tests, and simulation runs against existing free tools), not open-ended invention. That gap between two TRL-9 components and one un-integrated system is the applied-research question this brief is written to hand off.

## 1 The idea in one paragraph

A field of thumbnail-sized mirrors, each steered by a solid-state chip with no motor and no bearing, concentrates sunlight onto a single fixed point atop a ground-mounted mast. At that point sits a sealed engine with a piston that never touches anything it moves against — the same core design NASA has run continuously for fourteen years without a single maintenance visit. Matched to the same optical scale as the Swedish-engineered Ripasso Energy dish system that holds the reported world record for solar-to-electricity conversion, this combination is projected to deliver roughly **20–26 kWe of continuous, unattended power** — day after day, for decades, with no crew, no lubrication schedule, and no wear-driven failure mode in either major component.

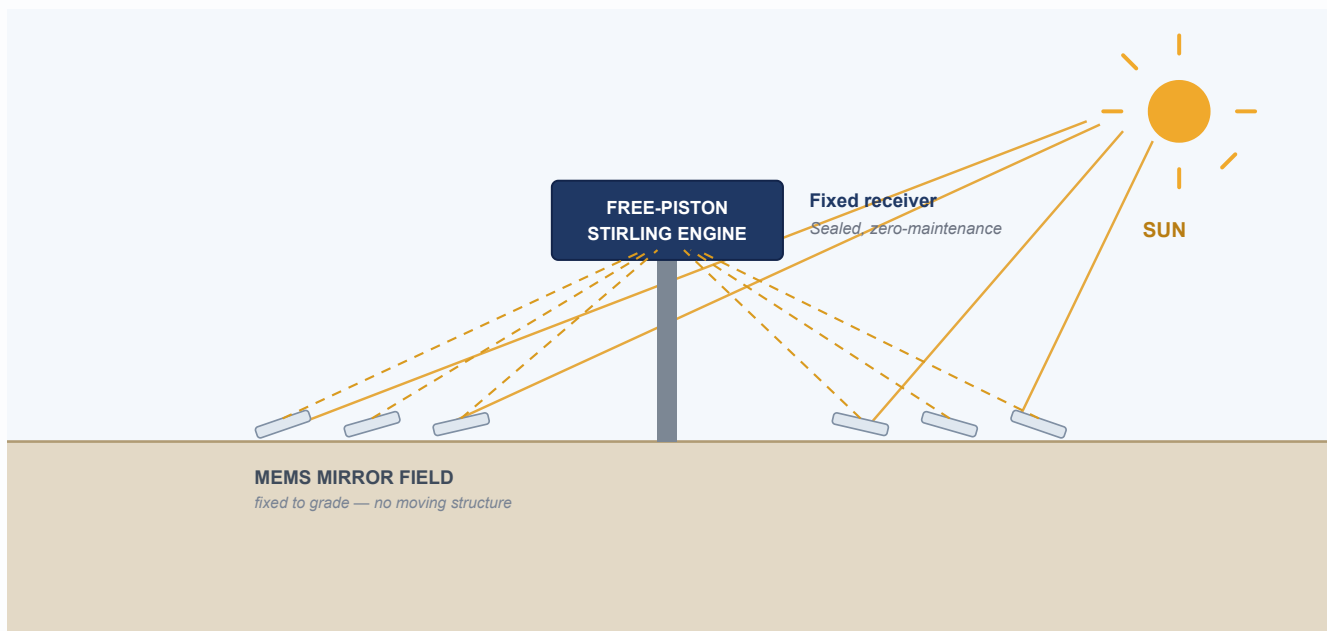

**Figure 1.** Cross-section, not to scale. Fixed, solid-state mirrors near grade redirect concentrated sunlight onto a single stationary receiver on a ground-mounted mast; the receiver houses the free-piston Stirling engine described in Section 3. The only motion anywhere in the system is the electrostatic tilt of each mirror element and the free-floating piston inside the sealed engine — nothing rides on a bearing, and nothing physically rotates to track the sun.

## WHY THIS MATTERS

Every part of this design that could wear out has been replaced with a part that structurally cannot. That converts a normally recurring operations-and-maintenance line item into a one-time capital cost — which matters most wherever power has to run unattended and a service call is expensive or impractical: telecommunications and microwave relay sites, remote environmental and seismic monitoring stations, pipeline cathodic-protection installations, off-grid research stations, water and irrigation infrastructure, mining and industrial sites far from a road, and island or rural microgrids.

The same properties that make it attractive for hard-to-service sites — no crew, no lubrication schedule, no wear-driven failure mode — are the properties that would make continuous solar power practical to deploy and forget at scale.

## 2 Component one — the mirror field

Conventional concentrated-solar installations track the sun by physically rotating a large dish or panel on a motorized two-axis gimbal. That approach has a poor reputation for field reliability — figures on the order of half of all mechanical trackers drifting out of specification within five to six years circulate widely in the industry, though this brief has no primary source for that particular number and does not rest on it. What is not in dispute is the failure *mechanism*: motors, bearings, wind loading, and ground settling under a heavy moving structure are the parts that go, and they are exactly the parts one would expect to go.

This design removes the moving structure entirely. Instead of one large assembly chasing the sun, a field of small mirrors does the steering, using the same underlying technology as a digital projector chip (DLP/DMD) — a solid-state array of independently tiltable micro-mirrors originally developed for optical switching and projection, and separately patented for solar concentration. Nothing rotates on a bearing; each mirror element repositions electrostatically.

How hard is it actually working?

Not very. Tracking the sun across a 12-hour day only requires each mirror to reposition a few times a minute. Run that pace for 25 years and the cumulative actuation count lands around **100–200 million cycles**. Texas Instruments' published reliability work on this same DMD technology reports more than **one trillion mirror cycles** and in excess of **100,000 operating hours** demonstrated in qualification and field testing. The mirrors are not being asked to approach their limits; they are being asked to do a small fraction of what they are already proven to survive.

|                                                                |                                                                              |                                                                   |
|----------------------------------------------------------------|------------------------------------------------------------------------------|-------------------------------------------------------------------|
| <div>~100–200M</div> <div>ACTUATION CYCLES OVER 25 YEARS</div> | <div>&gt;1 trillion</div> <div>MIRROR CYCLES DEMONSTRATED (TI DLP/DMD)</div> | <div>~5,000×</div> <div>MARGIN BELOW THE DEMONSTRATED COUNT</div> |
|----------------------------------------------------------------|------------------------------------------------------------------------------|-------------------------------------------------------------------|

The one open engineering question, stated honestly rather than assumed away: today's DMD chips are built for sealed indoor projectors, and moisture ingress is a known general concern for MEMS structures. Hermetic sealing against it, however, is routine, mature practice in other outdoor MEMS applications (automotive sensors, telecom equipment) — a one-time sealing design problem, not an ongoing maintenance burden the way a mechanical tracker's wear is.

3 Component two — the free-piston engine

The heat concentrated by the mirror field drives a **free-piston Stirling engine** — often described as having no moving parts that touch, since its piston floats on a cushion of working gas and magnetically coupled non-contact bearings, with no crankshaft, connecting rod, or lubricated joint anywhere in the power path. It is not literally pistonless; it is a real piston with nothing left for it to wear against.

This is not an unproven concept. NASA's Glenn Research Center has operated a free-piston Stirling convertor of this type **continuously for over fourteen years with zero maintenance**, and a second unit has logged more than 110,000 cumulative operating hours — over twelve years — and remains in service. The technology has since been commercialized: Qnergy's PowerGen line, built on the same free-piston principle originally engineered for NASA, is fielded today for exactly the kind of unattended, remote, multi-year deployment this concept targets (oil and gas remote power, pipeline and cathodic-protection sites, and other installations where a service crew is expensive or impractical to send).

## THE EFFICIENCY TRADE, STATED HONESTLY

The record-holding Swedish dish system uses a *kinematic* Stirling engine — crankshaft-linked, with real seals and wear points — to reach its reported **32%** conversion efficiency, measured on a 30 kW converter at Upington, South Africa. The free-piston alternative proposed here gives up some of that efficiency — commonly quoted in the 24–27% range, though this brief does not pin that range to a specific published measurement — in exchange for eliminating every wearing part. Given the goal is decades of unattended operation rather than peak efficiency, that is the trade this design makes.

### One engine, or several?

Free-piston Stirling engines do not scale up cleanly — larger units suffer worse working-gas leakage and tighter manufacturing tolerances, a real physical limitation rather than a simple manufacturing gap. Today's commercial ceiling is Qnergy's 5.6 kW-class unit. Reaching this design's full 20–26 kWe target output means installing four to five such units side by side rather than one large engine — which the mirror field accommodates naturally, since it can already split its concentrated light across multiple independent focal points instead of feeding just one.

## 4 Matched against the Swedish world record

---

Rather than project an untested hypothetical output figure, this design's mirror field was sized to exactly match the optical aperture of the actual dish used by Ripasso Energy, a Swedish company whose system holds the reported world record for solar-to-electricity conversion efficiency, demonstrated at field scale. At that matched aperture, and using a real, measured solar resource representative of a high-quality desert siting class, the mirror field is projected to deliver essentially the same peak power the record system itself achieves — a direct validation that a field of small, solid-state mirrors can do optically what one large mechanically-tracked dish does, at the same real scale, before any claim is made about the durability upgrade in Section 3. This design is not tied to any single location; the figures below use one real, cited desert site as an illustrative example of the resource class the concept targets, not a required site.

| Parameter                                             | Value                        | Basis                                                                                                                                                                                         |
|-------------------------------------------------------|------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Ripasso record efficiency (reference point)           | 32%                          | <b>Cited</b> — reported world record for a 30 kW converter at Upington, South Africa                                                                                                          |
| Matched optical aperture                              | 110.5 m <sup>2</sup>         | <b>Geometric</b> — the area of an 11.86 m circular dish ( $\pi r^2$ ), sized to the Ripasso dish diameter                                                                                     |
| Site annual solar resource (illustrative)             | 7.62 kWh/m <sup>2</sup> /day | <b>Cited</b> — measured direct-normal irradiance, U.S. Desert Southwest (NREL NSRDB), used as one representative example of a high-DNI desert site rather than a required location            |
| Site peak irradiance (record condition)               | 960 W/m <sup>2</sup>         | <b>Assumption</b> — a representative clear-sky DNI value. The Ripasso record is reported at ambient above 28 °C with no irradiance stated, so this is not a cited match to its test condition |
| Mirror reflectivity                                   | 92%                          | <b>Assumption</b> — typical of solar-grade mirrors; not a cited measurement of a specific product                                                                                             |
| Kinematic (record-matching) output                    | ~30–33 kWe                   | <b>Derived</b> from the rows above — lands in the same ~30 kW class as the record unit                                                                                                        |
| <b>Free-piston (adopted, zero-maintenance) output</b> | <b>~20–26 kWe</b>            | <b>Derived</b> , using the 24–27% free-piston range discussed in Section 3                                                                                                                    |

Read those labels literally. **Cited** means a source in the references supports the figure directly. **Derived** means it follows arithmetically from the rows above it. **Assumption** means it is a reasonable engineering placeholder that this brief does not have a citation for. Both assumptions sit in the optical chain, which compounds them — so the output figures are best read as an order-of-magnitude match to the record system, not a precise prediction.

## 5 Expected lifetimes

| Component                                                 | Wear mechanism                                                      | Field-demonstrated basis                                                                                                       | Real-world read                                                                          |
|-----------------------------------------------------------|---------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|
| Mirror field (MEMS)                                       | None — no bearings, no lubrication, solid-state actuation only      | >1 trillion mirror cycles and >100,000 operating hours demonstrated (TI DLP/DMD reliability program)                           | This design's full 25-year duty cycle uses roughly 0.02% of the demonstrated cycle count |
| Engine (free-piston Stirling)                             | None — non-contact bearings, no crankshaft, no lubricated joint     | 14 years continuous, zero maintenance (NASA Glenn); a second unit past 12 years / 110,000+ hours, still running                | Longest continuously-operating example currently exceeds a decade with no service event  |
| <i>For comparison — a conventional mechanical tracker</i> | <i>Motors, bearings, gimbal wear, wind and ground-settling load</i> | <i>Widely reported to lose specification within 5–6 years, but no primary source is cited here — see the note in Section 2</i> | <i>The failure mode this design was built specifically to remove</i>                     |

Put simply: the two components that usually define a solar installation's maintenance calendar — the tracker and the engine — have both been replaced here with the mechanism-level equivalent of a part that cannot wear out, each independently field-proven for over a decade before this concept was ever assembled.

## 6 Open research questions

Every open item below is a bounded, checkable question — a bench test, a chamber test, or a simulation run against tools that already exist — not a request to invent something new. None of it requires building the full system to answer.

### 6.1 Outdoor hermetic sealing under concentrated flux

The Texas Instruments reliability data in Section 2 covers sealed **indoor** projector duty. It says nothing about how a DMD-class package holds up to decades of outdoor thermal cycling, humidity, and back-heating from concentrated sunlight at the receiver end of the optical chain — a materially different exposure profile.

**Open question.** Does a hermetically-sealed DMD-class package survive 25 years of a desert site's diurnal and seasonal thermal cycling without seal fatigue or moisture ingress?

**Proposed test.** Accelerated life testing in an environmental chamber, cycled to a representative desert site's measured temperature and humidity extremes, tracking seal integrity — not actuation count, which is already covered by the  $\sim 5,000\times$  margin in Section 2.

### 6.2 Optical performance of a segmented mirror field vs. a single dish

Section 4's output figures assume the mirror field performs identically to the single continuous parabolic dish it is matched against by aperture area alone.

**Open question.** Does splitting one 110.5 m<sup>2</sup> aperture into many small, independently-steered flat elements introduce spillage or aberration losses at the fixed receiver that a continuous parabolic surface does not have?

**Proposed test.** Ray-tracing simulation of the proposed field geometry — NREL's own free SolTrace tool is built for exactly this — against the same irradiance and reflectivity inputs used in Section 4. This would also let a research group replace the two flagged **assumption** rows in Section 4's table with either a simulated result or a cited product spec, rather than an engineering placeholder.

### 6.3 Multi-engine thermal and control integration

Reaching the full 20–26 kWe target means feeding four to five independent Qnergy-class receivers from one mirror field (Section 3), not one.

**Open question.** What losses and control complexity does splitting concentrated flux across multiple independent focal points introduce, in real time, as the sun moves — versus the single-receiver case every cited reliability figure in this brief is actually based on?

**Proposed test.** Control-system simulation, or a small bench demonstration with two receivers, ahead of committing to the full four-to-five-unit array.

### 6.4 Closing the two flagged assumptions

The lowest-effort item on this list: the 92% mirror-reflectivity figure and the 960 W/m<sup>2</sup> peak irradiance figure in Section 4 are engineering placeholders, not citations. A group with institutional library and vendor-spec access could likely resolve both — a real product reflectivity spec, and a time/location-matched DNI figure for the actual Ripasso record conditions — well inside a week, or confirm that no better public figure exists.

## 7 Technology readiness

---

Every individual component in this design is already at the top of NASA's own technology readiness scale. What has not been done is combining them and validating the combination outdoors — normal, boundable applied-research territory, not first invention.



| Element                                                                               | TRL                                                              | Basis                                                                               |
|---------------------------------------------------------------------------------------|------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| Free-piston Stirling engine (as a component)                                          | <b>9 —<br/>flight/field<br/>proven</b>                           | 14+ years continuous NASA Glenn operation; in commercial production today (Qnergy)  |
| DLP/DMD MEMS mirror actuation (indoor duty)                                           | <b>9 —<br/>flight/field<br/>proven</b>                           | >1 trillion cycles, >100,000 hours demonstrated (TI reliability program, Section 2) |
| DLP/DMD-class mirror technology, adapted for outdoor concentrated-solar duty          | <b>3–4 —<br/>proof-of-<br/>concept to<br/>lab<br/>validation</b> | Same underlying actuation technology, unvalidated in this environment — see 6.1     |
| Full system integration (mirror field + fixed receiver + multi-engine array, coupled) | <b>2 —<br/>concept<br/>formulated</b>                            | No integrated demonstration yet; this brief is the concept                          |

The gap sits entirely at the environment-adaptation and integration level — precisely the kind of bounded, de-risking question that applied-research funding (NSF, DOE's Solar Energy Technologies Office, ARPA-E) exists to close, rather than a request to fund speculative first-of-a-kind invention.

## 8 Site requirements

This design is not tied to any one location. It targets the same class of site any concentrated-solar installation needs: open, low-value land with a high-quality direct-normal-irradiance (DNI) resource — desert and arid regions generally, such as the U.S. Desert Southwest, North Africa, the Middle East, the Atacama, or the Australian Outback. Section 4 illustrates the concept using real, measured U.S. Desert Southwest data (NREL/NSRDB, cited below) because it is directly comparable to the desert site conditions the Swedish record system itself was tested under — meaning the performance match in Section 4 is not a best-case extrapolation, it is close to an apples-to-apples reproduction — not because the design requires that specific site. The mirror field and receiver both sit at grade, with no excavation and no water resource required: the free-piston Stirling engine (Section 3) uses a sealed working-gas loop with air-cooled heat rejection — the same approach Qnergy's commercial units already use in remote, waterless field deployments — so unlike an open steam cycle's water-cooled condenser, it has no need for a lake, river, or other body of water.

## R References

- **NASA Glenn Research Center** — “Stirling Converter Sets 14-Year Continuous Operation Milestone”  
*Official NASA source for the 14-year continuous, maintenance-free free-piston Stirling operation record.*  
<https://www.nasa.gov/centers-and-facilities/glenn/stirling-converter-sets-14-year-continuous-operation-milestone/>

- **Qnergy** — PowerGen free-piston Stirling generator product documentation  
*Commercial free-piston Stirling generator, 1.8–5.6 kW output range — the real basis for the multi-unit scaling figure in Section 3, and manufacturer confirmation linking the NASA-heritage design to today's commercial units.*  
<https://www.qnergy.com/>
- **Reuters Events (CSP Today)** — “Ripasso Energy sets new solar-to-electricity world record”  
*Source for the 32% figure used in Sections 3 and 4: a reported world record of 32% for a 30 kW converter at Ripasso Energy's plant in Upington, South Africa, at an ambient temperature above 28 °C.*  
<https://www.reutersevents.com/renewables/csp-today/technology/ripasso-energy-sets-new-solar-electricity-world-record>
- **U.S. Department of Energy** — “Solar Dish Sets World-Record Efficiency”  
*A **separate** dish-Stirling efficiency record — 31.25%, achieved by Stirling Energy Systems, not by Ripasso. Included as independent corroboration that this class of machine reaches roughly 31%, and explicitly not as the source for the Ripasso figure. Some secondary coverage reports Ripasso at 34%; this brief uses the lower, better-documented 32% instead.*  
<https://www.energy.gov/node/1758401>
- **Douglass, Michael R.** — “DMD Reliability: A MEMS Success Story,” *Proc. SPIE* 4980, Texas Instruments (2003)  
*Source for the multi-billion-to-trillion-cycle and operating-hour DLP/DMD reliability data underlying the mirror-field durability figures in Sections 2 and 5.*  
[https://www.ti.com/pdfs/dlpdmd/153\\_Reliability\\_paper.pdf](https://www.ti.com/pdfs/dlpdmd/153_Reliability_paper.pdf)
- **Patent EP2911208A1** — “Micro-Concentrator Solar Array Using Micro-Electromechanical Systems (MEMS) Based Reflectors”  
*Real, existing published patent for the MEMS solar-tracking mirror concept described in Section 2 — not a hypothetical proposal.*  
<https://patents.google.com/patent/EP2911208A1/en>
- **National Renewable Energy Laboratory (NREL)** — National Solar Radiation Database (NSRDB)  
*Source for real, measured direct-normal irradiance data for the U.S. Desert Southwest, used in Section 4 as one illustrative example of a high-DNI desert site.*  
<https://nsrdb.nrel.gov/>
- **National Renewable Energy Laboratory (NREL)** — SolTrace: Optical modeling software for concentrating solar power systems  
*Free, public ray-tracing tool proposed in Section 6.2 for validating the mirror field's optical performance and replacing the two flagged assumption figures in Section 4.*  
<https://www.nrel.gov/csp/soltrace.html>
- **NASA** — Technology Readiness Levels  
*Source for the TRL 1–9 scale used to assess each component in Section 7.*  
<https://www.nasa.gov/directorates/somd/space-communications-navigation-program/technology-readiness-levels/>

## § About this publication

---

**Independent personal research.** This brief is independent personal research by Brett R. Jones, carried out on personal time using personal equipment and publicly published sources. It is not affiliated with, sponsored by, funded by, reviewed by, or produced for any employer, client, institution, or agency, and it represents no organization's position — only the author's own.

**Scope and status.** Concept-stage engineering brief. It is not peer-reviewed, not an engineering specification, and not an offer to build, sell, or license anything. The Section 4 table labels each figure as **cited**, **derived**, or **assumption**, and the two assumptions in the optical chain are named as such rather than presented as measurements. The mechanical-tracker failure statistic in Section 2 is likewise flagged as uncited. Where a range is shown it reflects genuine uncertainty rather than false precision. The purpose here is to interest a reader in the concept — not to assert a validated result, and not to sell anything.

**Sources.** All material derives from publicly published sources — NASA and U.S. Department of Energy publications, a published patent, manufacturer product documentation, a peer-reviewed conference paper, and public NREL solar-resource data. Each is listed above.

**Intent.** Published as an open disclosure so the concept remains freely available for anyone to read, use, or build on. The author is not seeking to license, sell, or commercialize it.

**Publication record.** First published 18 August 2026 at nolimitconnect.org, most recently revised 5 September 2026. Authorship and revision history are recorded in the project's public Git repository at [github.com/nolimitconnect/NoLimitConnect](https://github.com/nolimitconnect/NoLimitConnect).

**License.** © 2026 Brett R. Jones. Text and figures released under Creative Commons Attribution 4.0 International (CC BY 4.0) — free to share and adapt, with attribution to the author.

#### **How to cite.**

Jones, Brett R. *Maintenance-Free Solar Generator: A Sun-Tracking Mirror Field and a Zero-Wear NASA-Heritage Engine*. Concept brief, 18 August 2026, revised 5 September 2026.  
<https://nolimitconnect.org/maintenance-free-solar-generator/>

---

*This is a concept-stage engineering brief. Figures are labeled in Section 4 as cited, derived, or assumption, and the uncited items are flagged where they appear rather than smoothed over. Where a range is shown, it reflects genuine real-world uncertainty rather than false precision.*