Häny Mixing and Injection Technology

Compact Grout Plant IC 325CCP

Combined **C**ement **P**U



Sudden water pressure in pressurised water zones can overwhelm conventional seals and jeopardise construction progress. The compact solution is our IC 325CCP – optimised for narrow working areas and integration on TBMs, SBMs and other systems.

HÄNY
Mixing and Injection Technology

Compact Grout Plant

IC 325CCP

Combined **C**ement **PU**


Key features

- Combines cement suspension with polyurethane to form a stable overall injection. The system can be used both for pure cement suspensions and for combined cement-polyurethane injections (CCP) as well as for pure 2C-PU injections
- The mixing ratio of polyurethane to cement suspension can be flexibly adjusted and controlled
- Maximum flexibility - High efficiency
- Anti-washout effect - Saves time and material
- Automated operation - Less manual effort, fewer errors
- Consistent and precise mixing quality - For optimum material performance and reliability
- High injection pressure - Ensures deep penetration and effective sealing
- Adaptable to different injection materials - Versatile in use
- Low maintenance - Minimises downtime and operating costs
- Environmentally friendly - Reduces material waste and optimises the use of resources
- Compact and modular design - Easy to transport and flexible in use

Typical applications

- Tunnelling | Civil engineering
- Hydraulic engineering | Shaft sinking

Pump performance

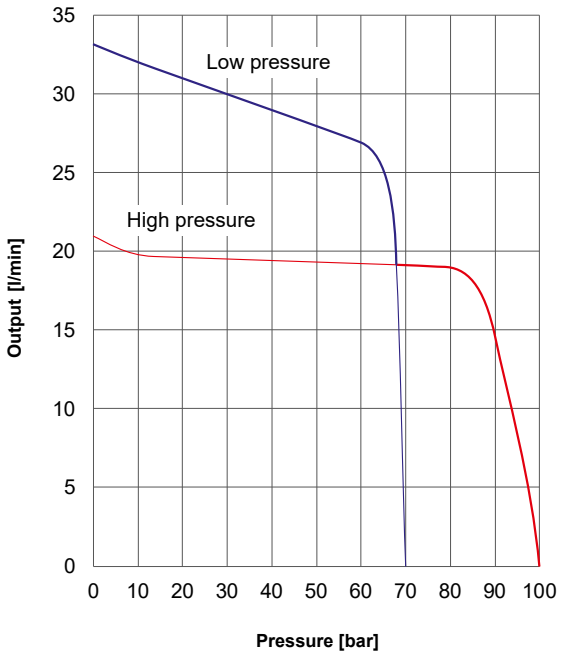

Grout pump	ZMP 625
Capacity IC[1]:	2 m³/h
Max. pressure:	100 bar
Max. aggregate size:	5 mm
Hydraulic tank:	52 l
Pump module:	double
Cooling water flow rate:	2–3 l/min
Cooling water connection:	BSP ⅜"
Pressure connection:	BSP 1"

Included as standard

- Manual pressure and flow control
- Oil level indicator with thermometer

Mixer / Agitator

Usable content mixer:	100 l
Circulation capacity:	540 l/min
Water connection:	BSP ¾"
Holding capacity agitator:	150 l

Optional

- Auxiliary mixing unit (recommended for W/C < 0.45)
- Automatic water meter

[1] Water to cement ratio = 1

PU injection pump

Max. capacity:	14 l/min
Max. pressure:	195 bar
Mixing ratio:	1:1
Pressure ratio:	30:1

Weight and dimensions

Approx. weight:	840 kg
Width:	885 mm
Height:	1,590 mm
Length:	2,110 mm

Electrical data

Voltage:	3x 400/460
Frequency:	50 / 60 Hz
Nominal power:	9.1 / 10.5 kW

Control

PLC with stroke counter
Lockable main switch, emergency stop
Mixer ON-OFF
Agitator ON-OFF
Pump ON-OFF


Pneumatic data

Max. air inlet pressure:	6.5 bar
Max. air consumption:	2500 l/min
Air connection:	BSP 1"


CCP control unit

Stepless control mixing ratio 0 to 30%
P-Q registration Cement suspension & polyurethane

Construction and dimensions

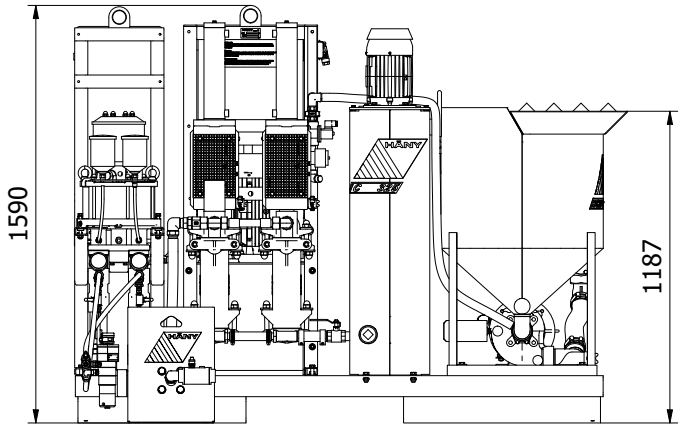



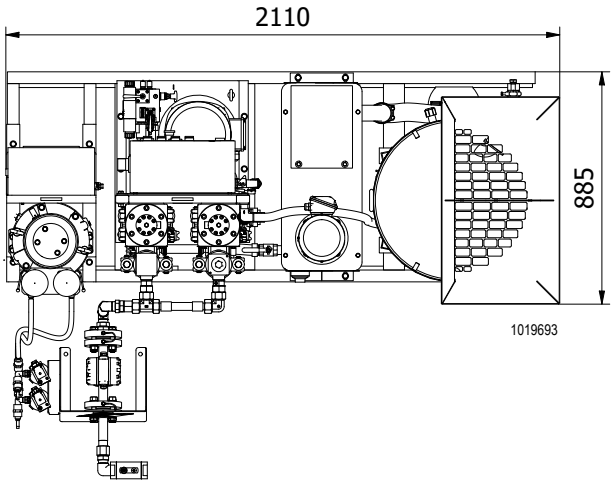





Document No. PM2-102939 00/03.25. Legal Notice © Copyright 2018, Häny AG, Jona/Switzerland. Any unauthorized use or copying of the contents or any part hereof is prohibited. Illustrations and photos may show equipment with optional extras. No warranty is made regarding specifications or otherwise. Specifications and equipment are subject to change without notice.

HÄNY
Mixing and Injection Technology

Häny AG – Mixing and Injection Technology
Buechstr. 20 | 8645 Jona/Switzerland | Phone +41 848 786 736 | www.haeny.com