


Size: mm (80 x12.7 x 12.7 mm)

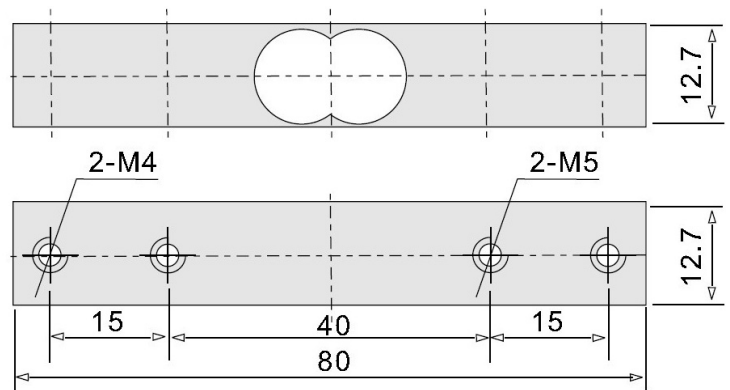

Features:

Model: SC133

Rated load: 10 kg

Precision: 0.05% F.S

Material: Aluminum alloy

Apply to: kitchen scale, body scale, baby scale, Platform scale, pricing scale, fore test equipment

Parameter

Rated Output	mv/v	1.0 ± 0.2
Non-linearity	%F.S	0.05
Hysteresis	%F.S	0.05
Repeatability	%F.S	0.05
Creep	%F.S/30min	0.05
Temp. effect on zero	%F.S/10°C	0.05
Temp. effect on span	%F.S/10°C	0.05
Zero balance	m V/V	± 0.1
Input impedance	Ω	1000 ± 10
Output impedance	Ω	1000 ± 10
Insulation resistance	M Ω	≥ 2000 (100VDC)
Temperature compensated range	°C	-10~+40
Recommended excitation voltage	VDC	5-12 VDC
Safe overload	%F.S	120
Ultimate Overload	%F.S	150
Connection	Excitation: Red+, Black- Signal: Green+, White-	

Application:

