



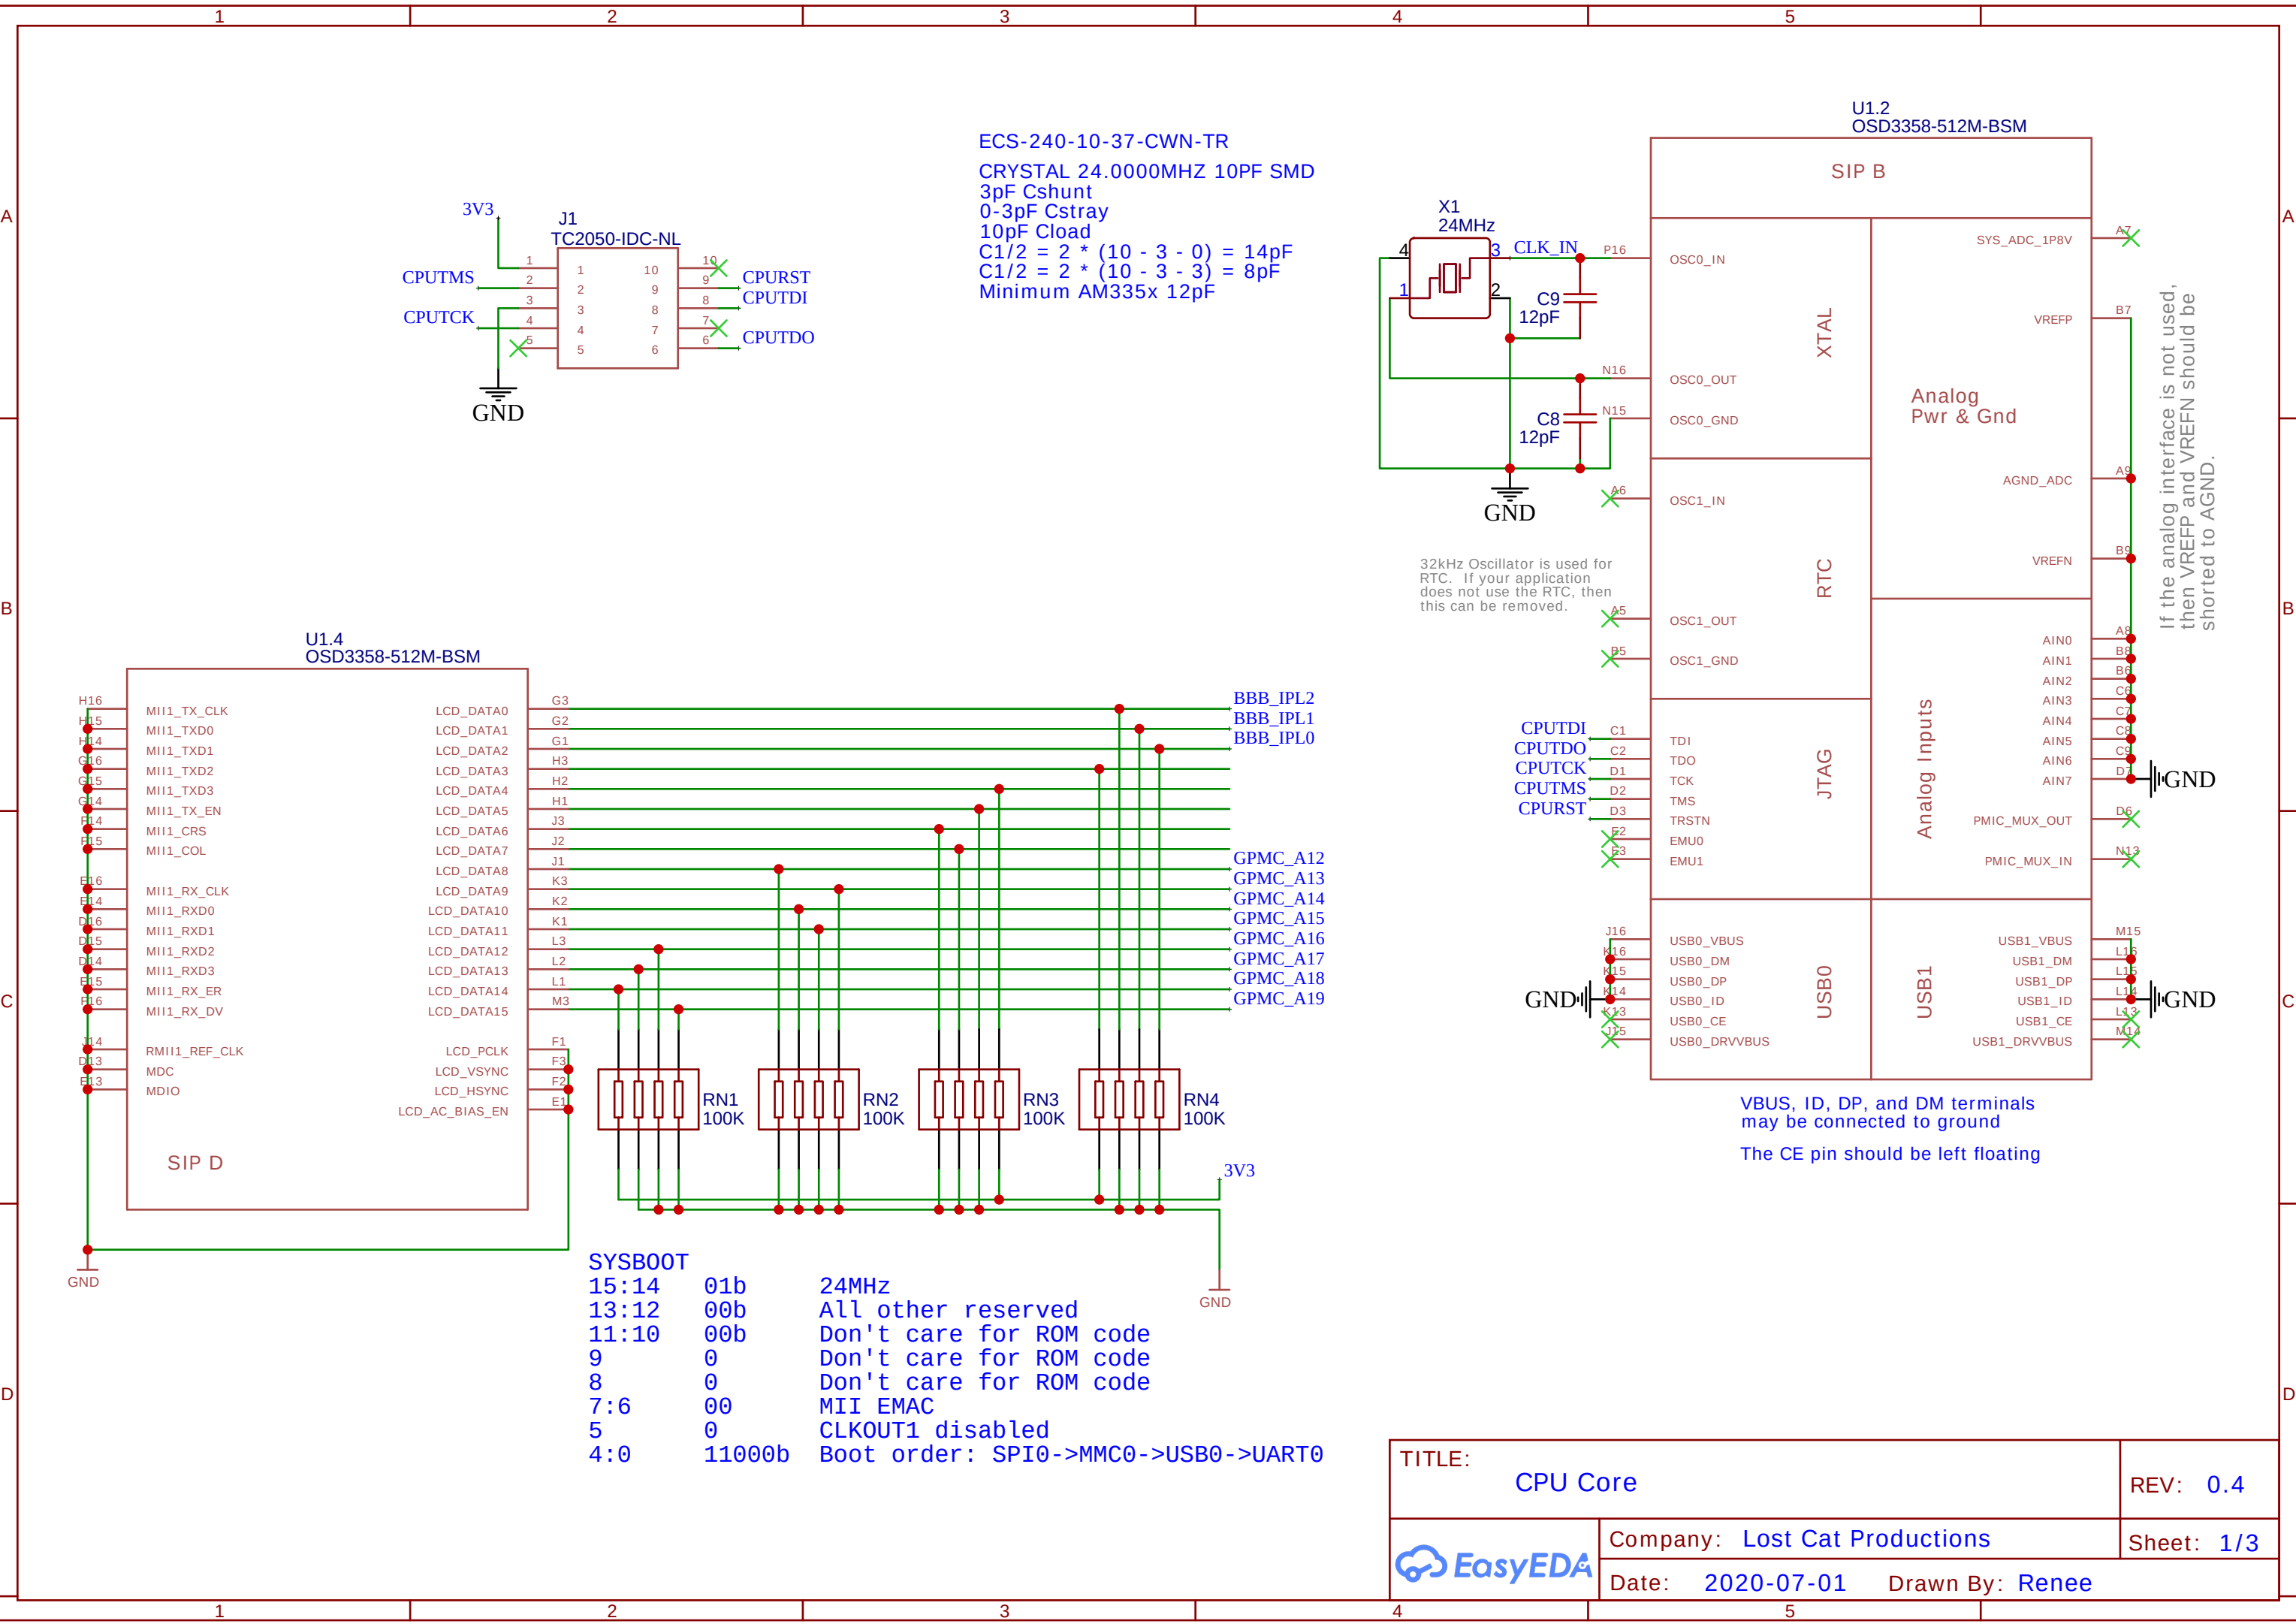




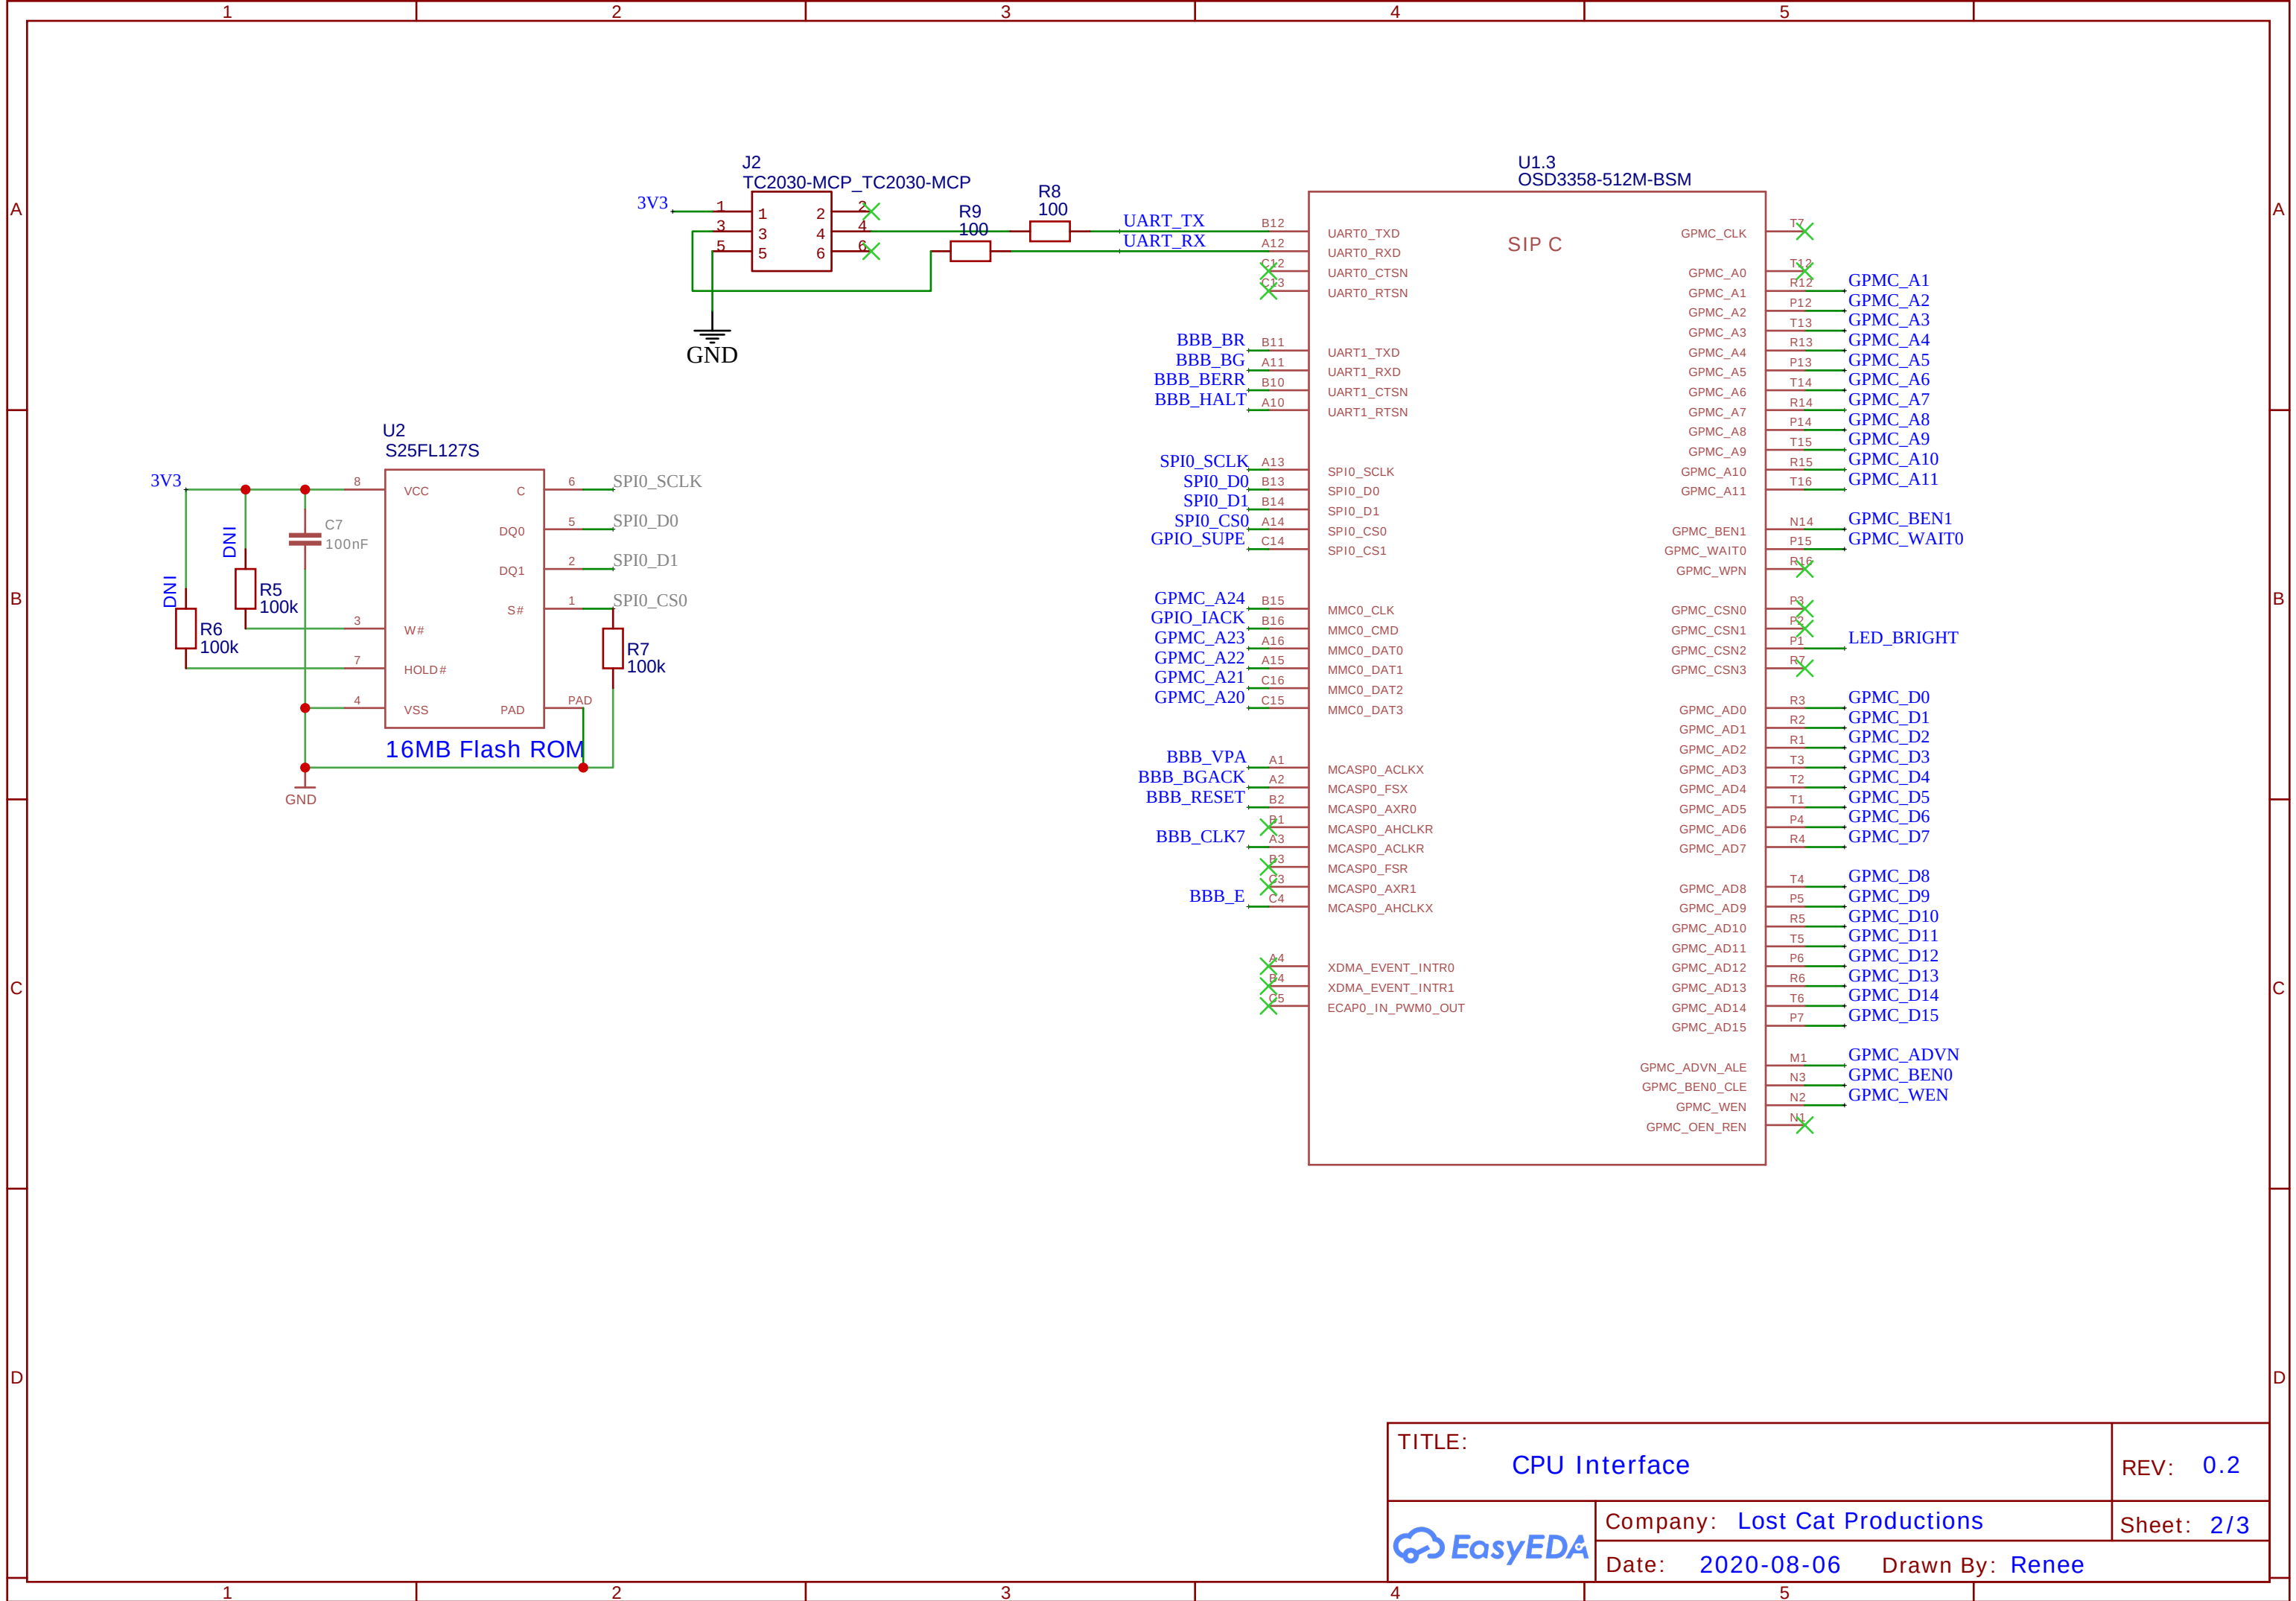


UDS: D15~D8
LDS: D7~D0

- 1 Lower byte access
UDS high:LDS low
- 2 Higher byte access
UDS low:LDS high
- 3 Word access
UDS low:LDS low

The BE0n/BE1n(byte enable)
terminal is the following.

- 1 Lower byte access
BE0 low:BE1 high
- 2 Higher byte access
BE0 high:BE1 low
- 3 In the case of word access
BE0 low:BE1 low



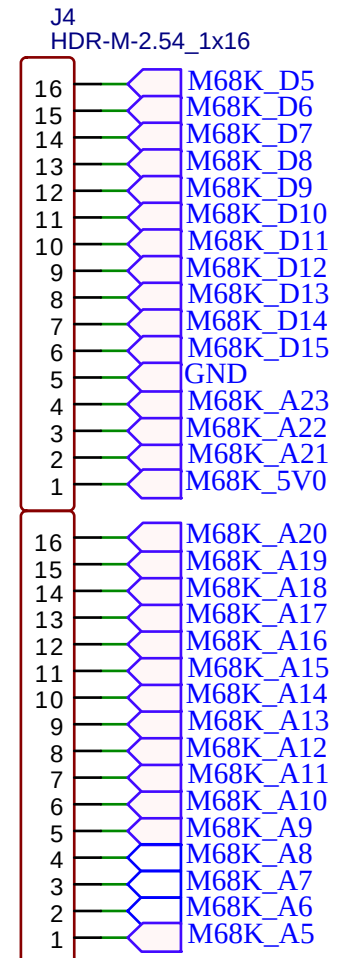
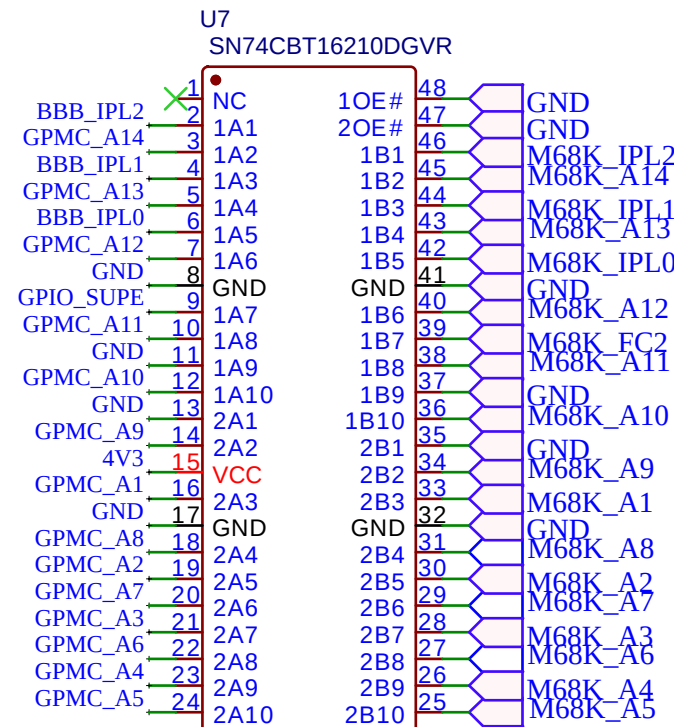
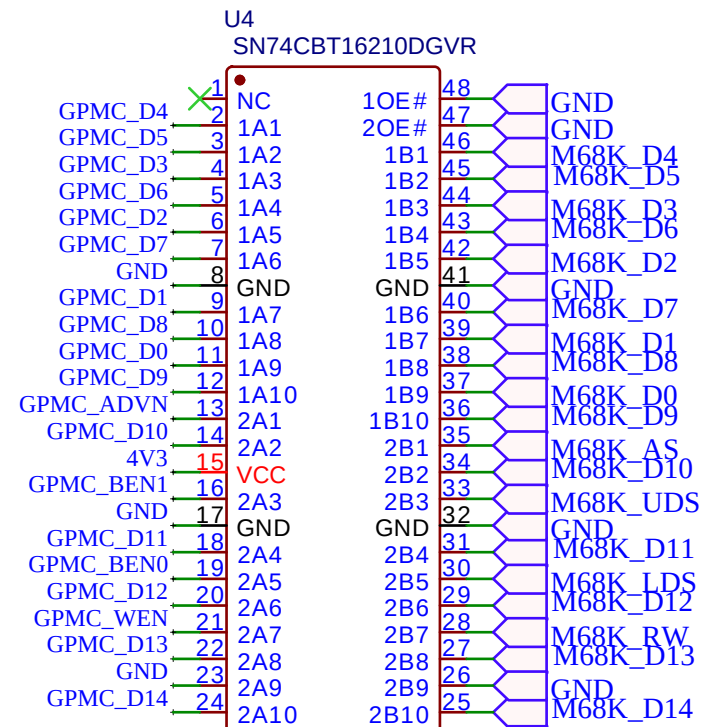


FC2 = GPIO_SUPE


FC1 = A24 | GPIO_IACK
Fig 7. Y = IN1 | IN2; IN0 = Vcc

FC0 = ~A24 | GPIO_IACK
Fig 5. Y = ~IN0 | IN2; IN1 = Vcc

HDR-M-2.54_1x16
J3

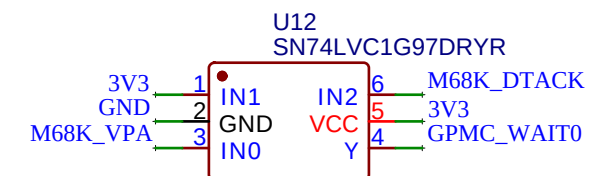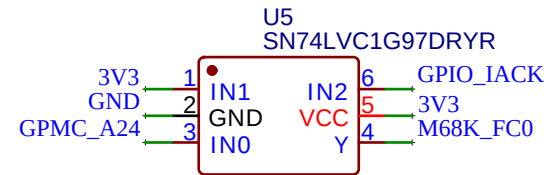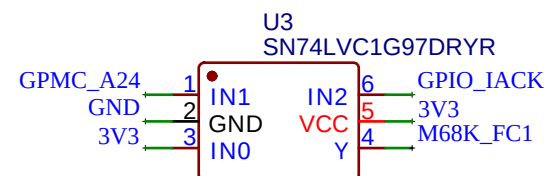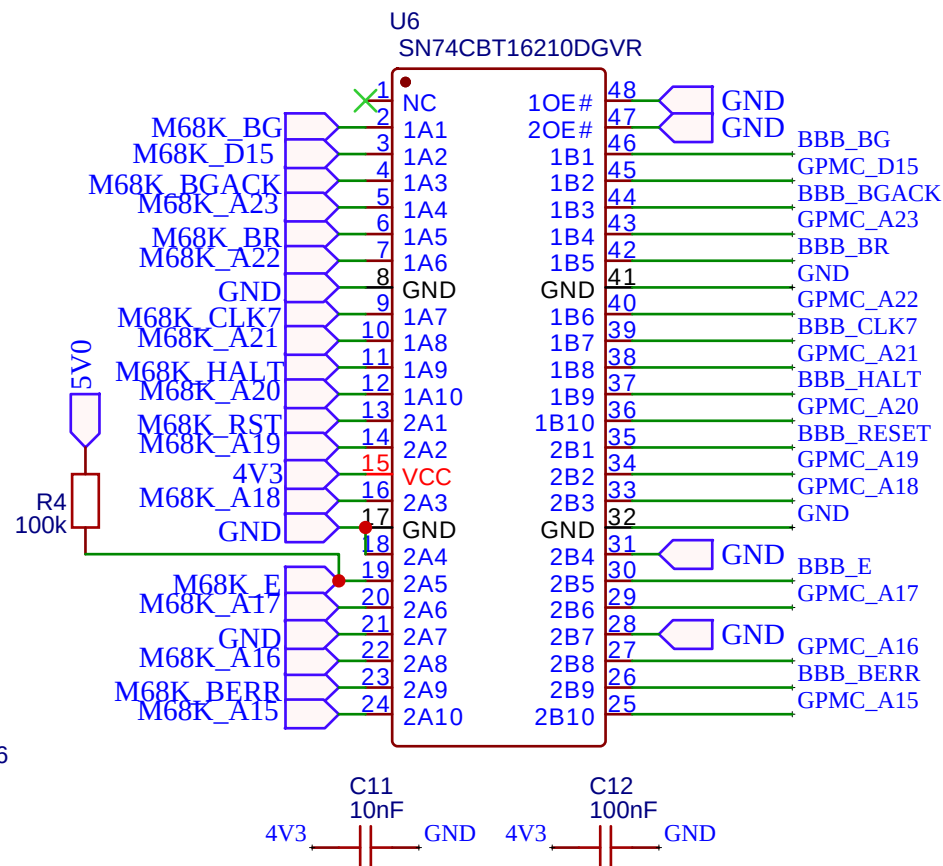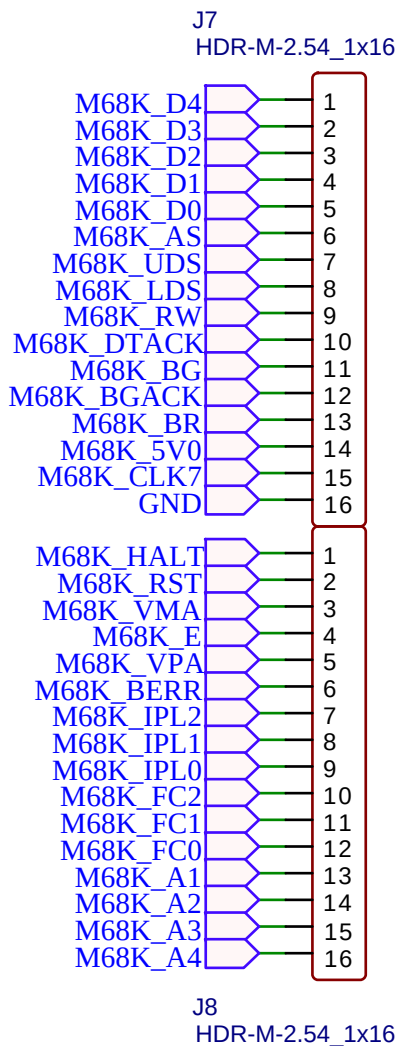

WAIT0 = ~VPA or DTACK
Fig 5. Y = ~IN0 | IN2; IN1 = Vcc

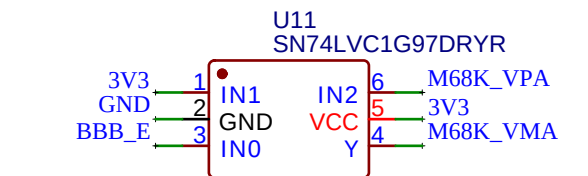

VMA = ~ECLK or VPA
Fig 5. Y = ~IN0 | IN2; IN1 = Vcc

TITLE: M68K Interface		REV: 0.2
EasyEDA	Company: Lost Cat Productions	Sheet: 3/3
	Date: 2020-07-01	Drawn By: Renee

