




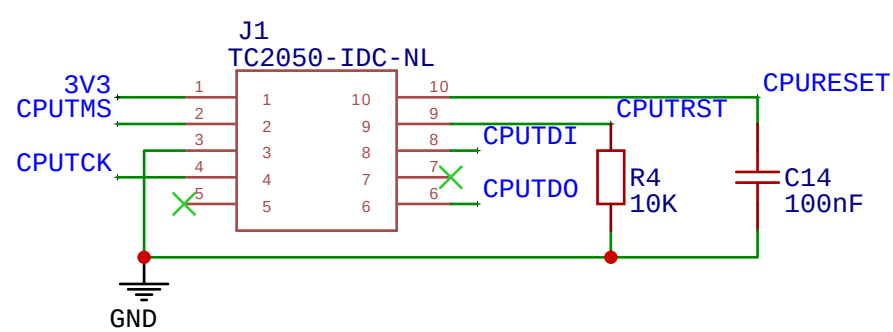

ECS-240-10-37-CWN-TR
CRYSTAL 24.0000MHZ 10PF SMD
3pF Cshunt
0-3pF Cstray
10pF Cload
 $C1/2 = 2 * (10 - 3 - 0) = 14pF$
 $C1/2 = 2 * (10 - 3 - 3) = 8pF$
Minimum AM335x 12pF

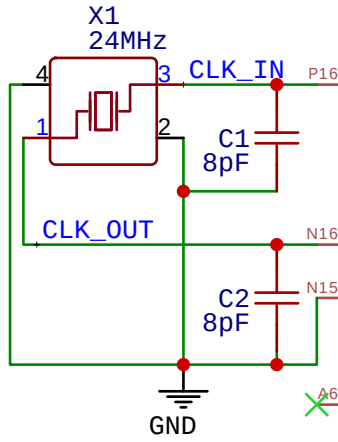

32kHz Oscillator is used for RTC. If your application does not use the RTC, then this can be removed.

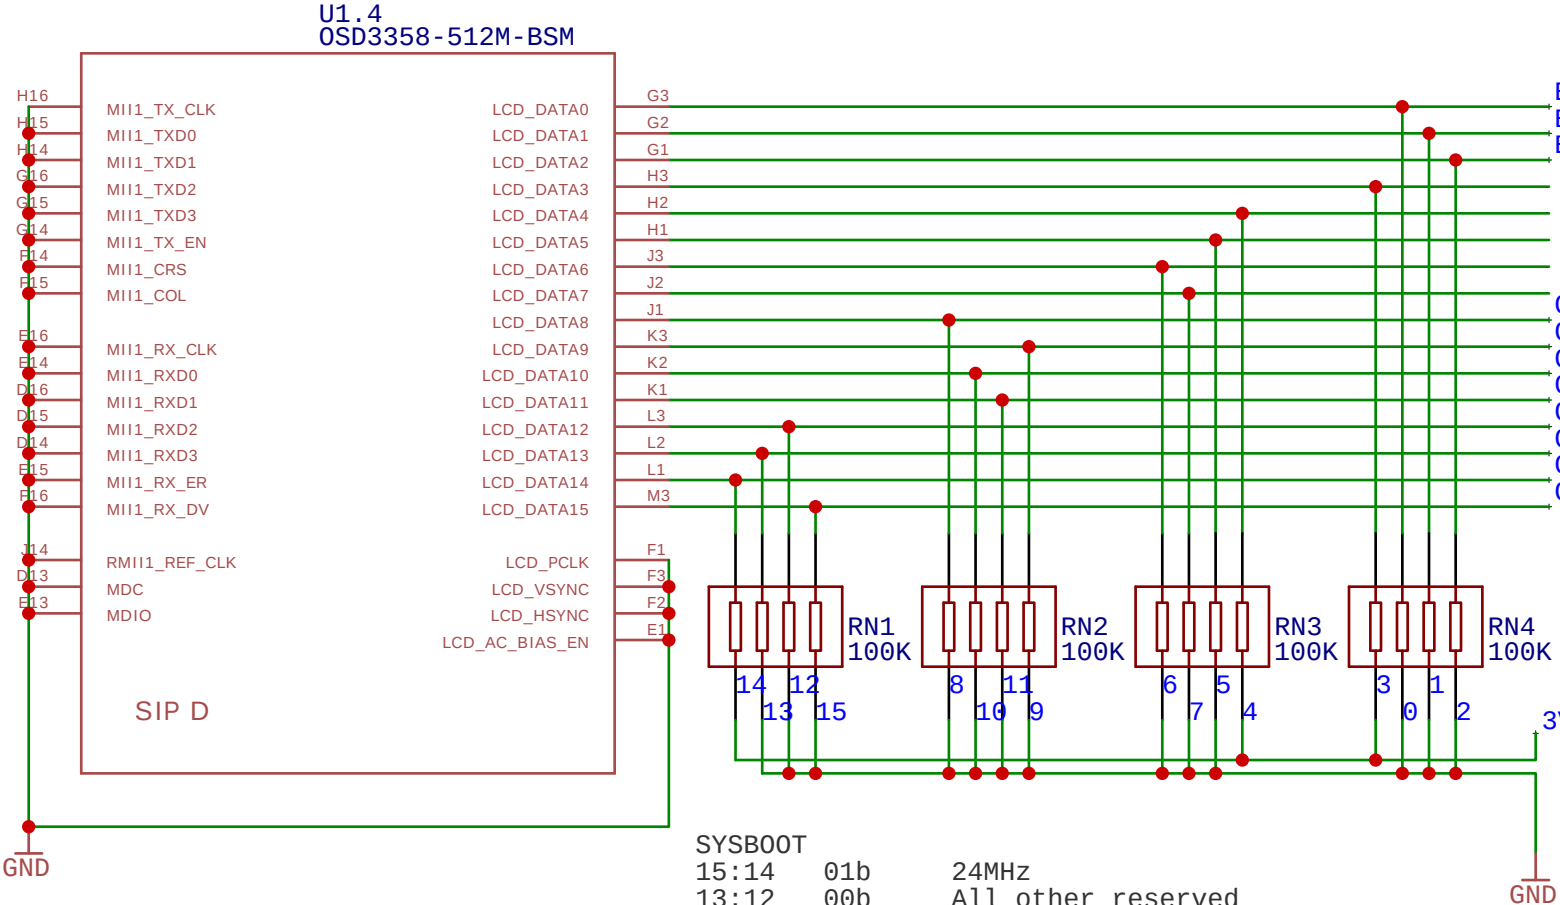


SYSBOOT
15:14 01b 24MHz
13:12 00b All other reserved
11:10 00b Don't care for ROM code
9 0 Don't care for ROM code
8 0 Don't care for ROM code
7:6 00 MII EMAC
5 0 CLKOUT1 disabled
4:0 11000b Boot order: SPI0->MMC0->USB0->UART0

CPUTDI
CPUTDO
CPUTCK
CPUTRST



VBUS, ID, DP, and DM terminals may be connected to ground
The CE pin should be left floating

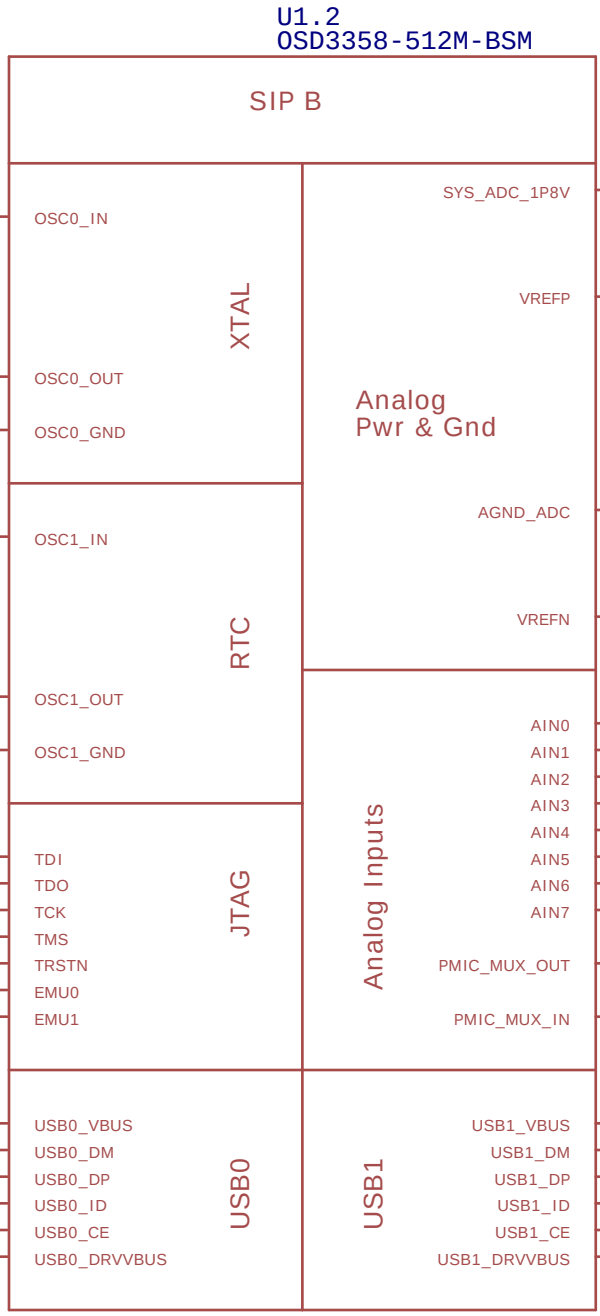

If the analog interface is not used, then VREFP and VREFN should be shorted to AGND.


UDS: D15~D8
LDS: D7~D0

- 1 Lower byte access
UDS high:LDS low
- 2 Higher byte access
UDS low:LDS high
- 3 Word access
UDS low:LDS low


The BE0n/BE1n(byte enable)
terminal is the following.

- 1 Lower byte access
BE0 low:BE1 high
- 2 Higher byte access
BE0 high:BE1 low
- 3 In the case of word access
BE0 low:BE1 low


U4
SN74CBT16210DGVR

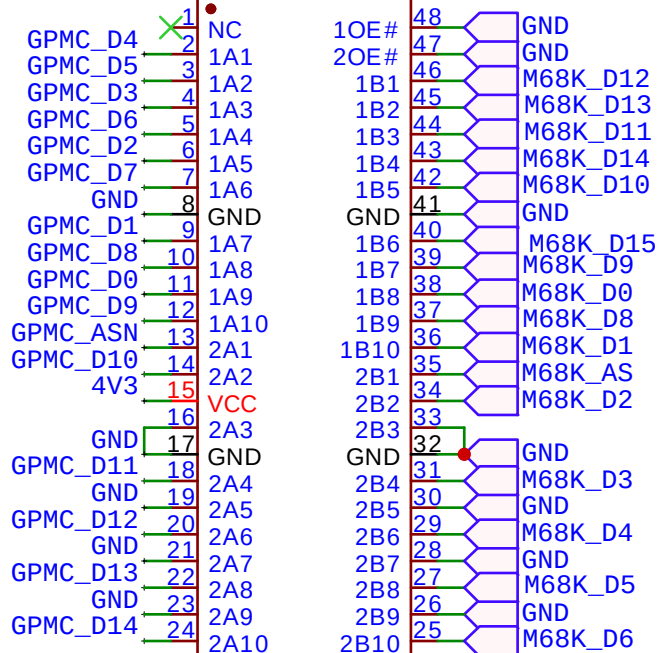



U5
SN74CBT16210DGVR

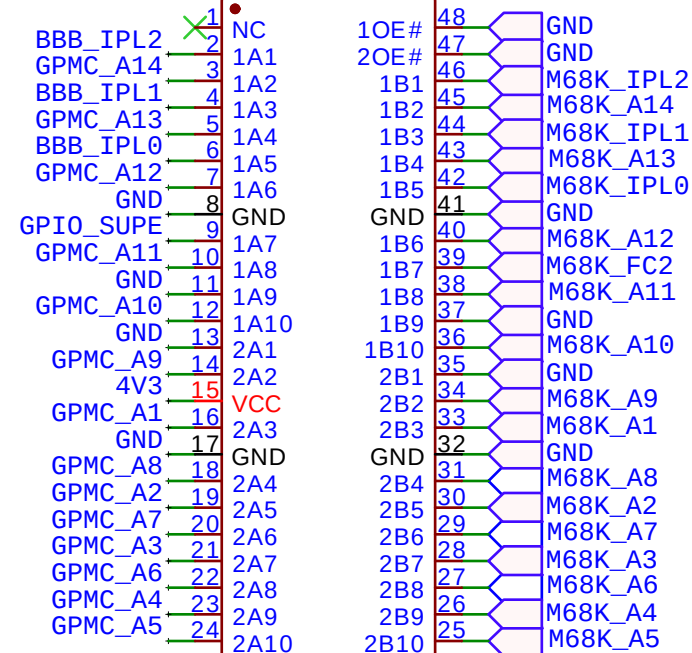


GPMC_D0 to GPMC_D7 --> M68K_D8 to M68K_D15
GPMC_D8 to GPMC_D15 -> M68K_D0 to M68K_D7




U6
SN74CBT16210DGVR

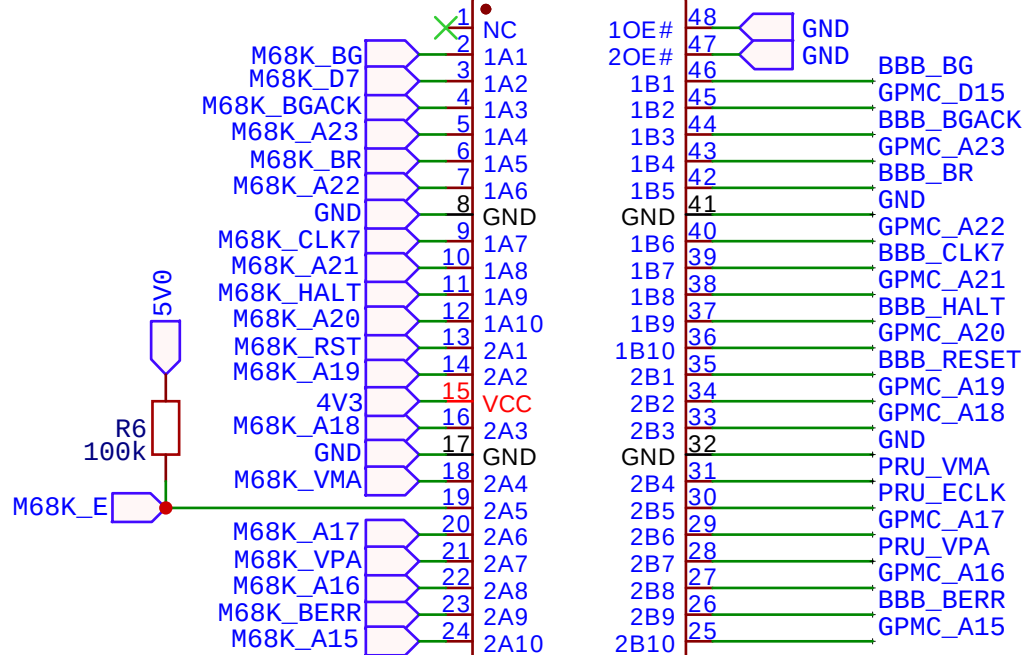

U3
SLG46826V

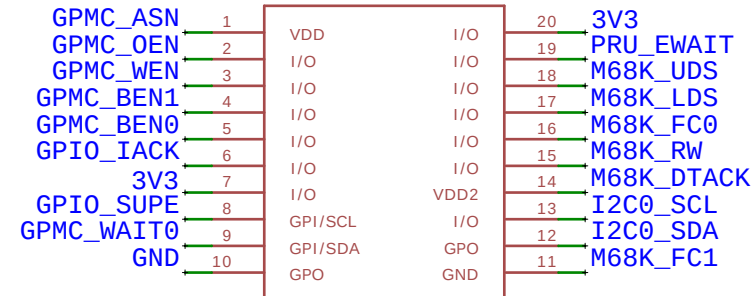

J4
BBL-132-T-E

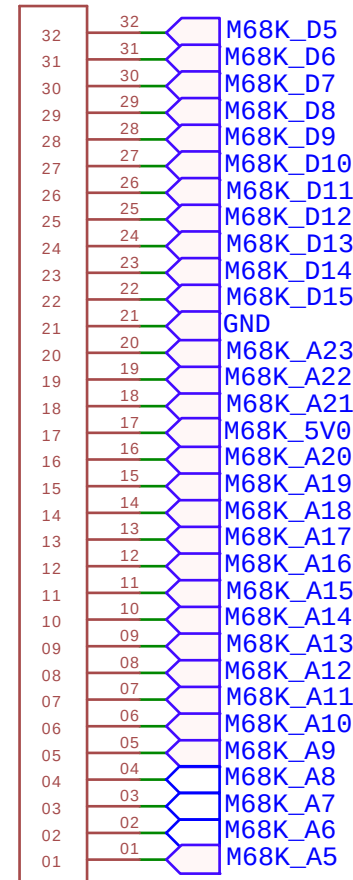

TITLE: M68K Interface		REV: 0.5
EasyEDA	Company: The Buffee Project	Sheet: 4/4
	Date: 2021-04-08	Drawn By: Renee

A nonportable system operates on a regulated 5-V supply that does not require input overvoltage protection. In this case, the 5-V power supply is connected through the BAT pins. The DC/DC converter inputs, WLED driver, LD01, and LD02 are connected directly to the 5-V supply. A standard, constant-value 10-kΩ resistor is connected from the TS pin to ground to simulate the NTC thermistor monitoring the battery. The load switches (or LD03 and LD04, depending on configuration) typically connect to one of the lower system rails, but can also be connected directly to the 5-V input supply.

