


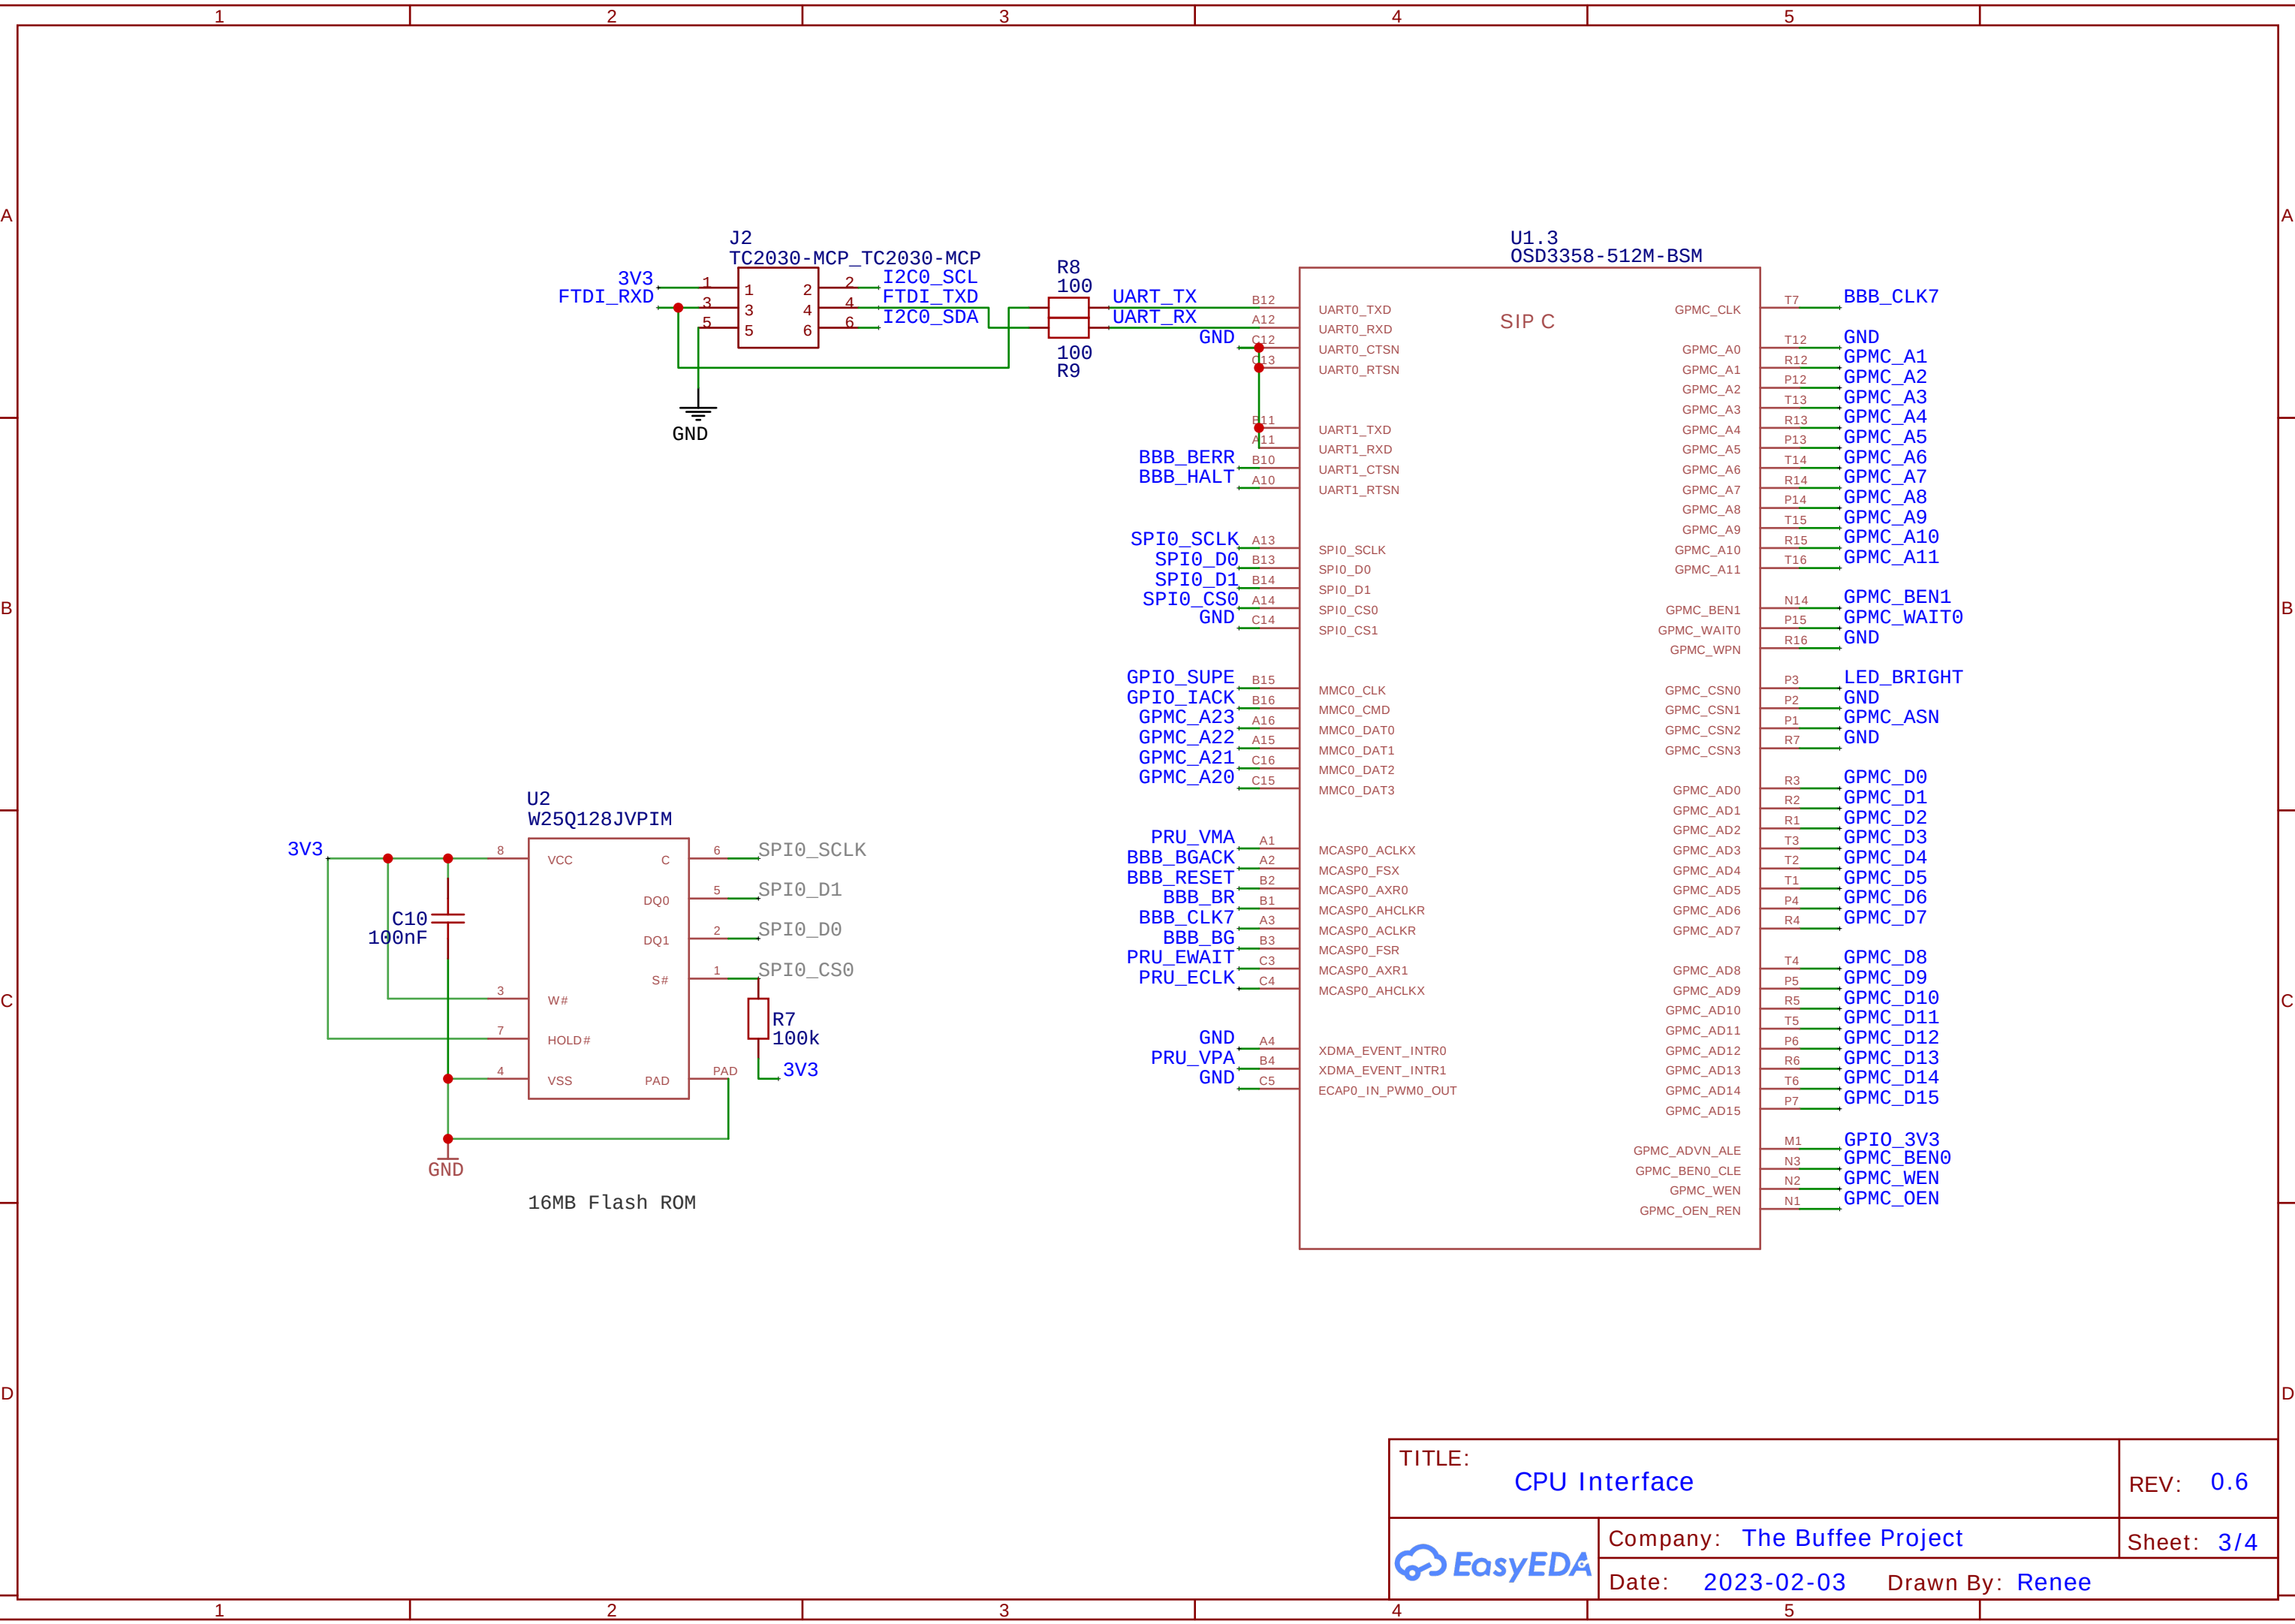

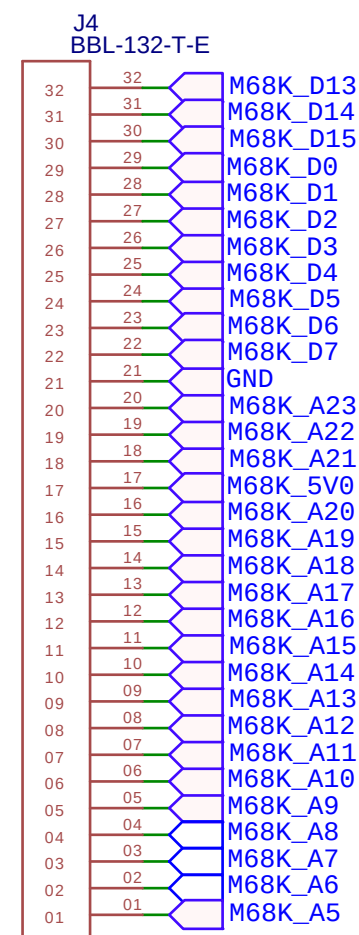
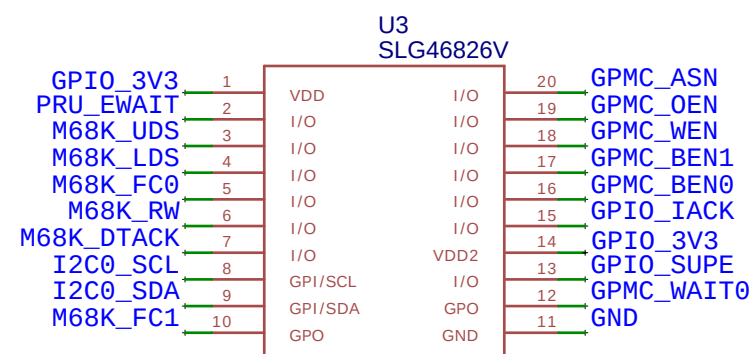






- 1 Lower byte access
BE0 low:BE1 high
- 2 Higher byte access
BE0 high:BE1 low
- 3 In the case of word access
BE0 low:BE1 low



TITLE: M68K Interface		REV: 0.6
	Company: The Buffee Project	Sheet: 4/4
	Date: 2023-02-03 Drawn By: Renee	

A nonportable system operates on a regulated 5-V supply that does not require input overvoltage protection. In this case, the 5-V power supply is connected through the BAT pins. The DC/DC converter inputs, WLED driver, LD01, and LD02 are connected directly to the 5-V supply. A standard, constant-value 10-k Ω resistor is connected from the TS pin to ground to simulate the NTC thermistor monitoring the battery. The load switches (or LD03 and LD04, depending on configuration) typically connect to one of the lower system rails, but can also be connected directly to the 5-V input supply.

